



RADIO

ESTABLISHED 1917



DESIGN, RESEARCH
PRODUCTION, OPERATION

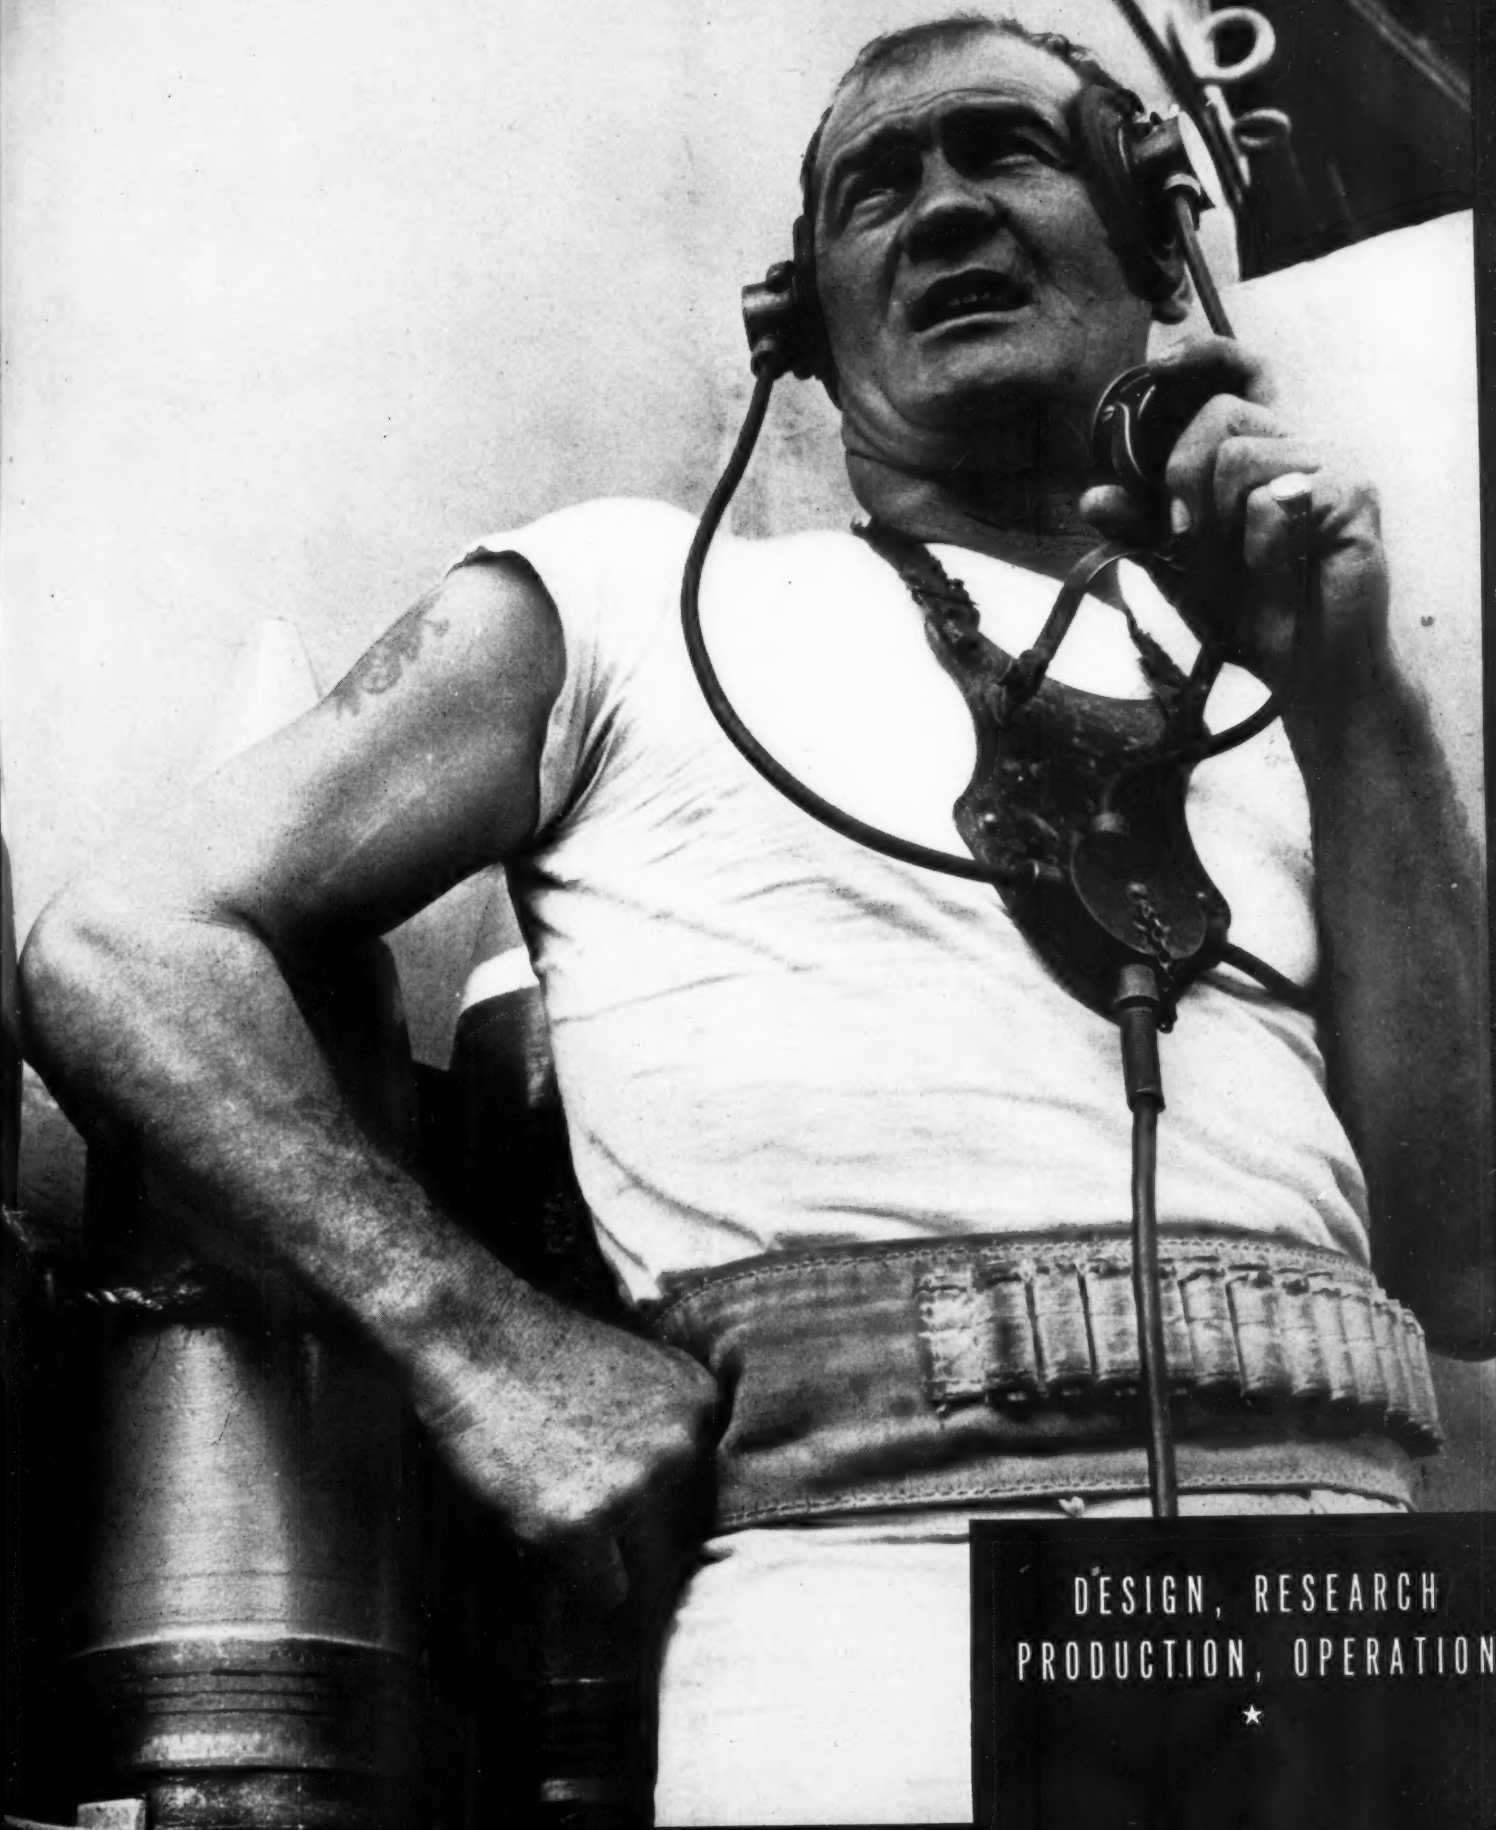

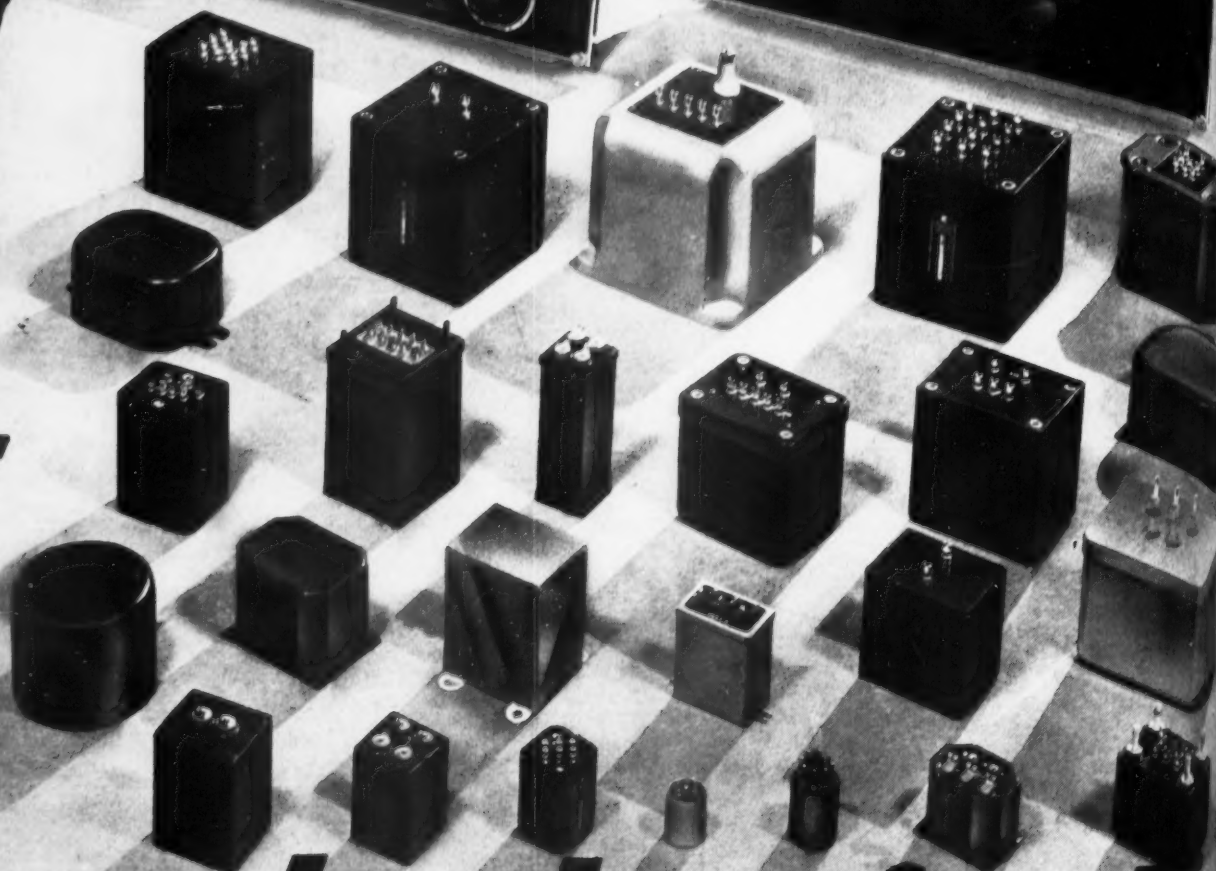

Leads the field

UNITED TRANSFORMER CO.

150 VARICK STREET



NEW YORK, N. Y.



the Sky Buddy was good...but -

THOUSANDS of *Hallicrafters Sky Buddies* gave faithful service . . . years of excellent performance! Sky Buddy owners will be amazed at how far-reaching the progress of research and new electronic development has been, even in the past year.


When Hallicrafters are again permitted to sell communications receivers for civilian use your new Sky Buddy will have so many improvements, comparison with the old models will be a difficult accomplishment.

Illustration (top) partial view of Hallicrafters Signal Corps communications equipment.

the hallicrafters co.

CHICAGO, U. S. A.

keep communications open!

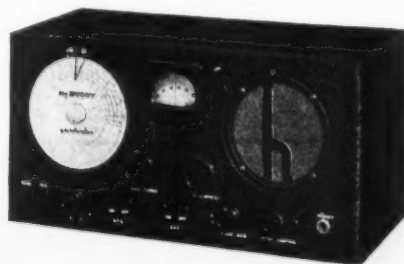

Surpassing Requirements!



Military specifications, as applied to communications follow strict rules. Hallicrafters Communications equipment not only meet these rigid specifications ... they surpass the requirements.

C-7. Fixed Capacitors. The maximum peak voltage applied on any of the fixed paper — dielectric capacitors shall not exceed the manufacturer's working voltage rating of that capacitor. All electrolytic capacitors shall be capable of continuous operation at a temperature of degrees C. The normal working voltage applied on any fixed capacitor shall not exceed per cent of the manufacturer's voltage rating. All fixed paper or capacitors shall be sealed.

C-8. Resistors. All resistors shall have their resistance values plainly and legibly marked on them, or as an alternative they may be color-coded in accordance with the Standard Resistor Color Code of the Radio Manufacturer's Association. All fixed resistors shall be of the type and shall be capable of dissipating without damage to themselves, or any other part of the equipment, at least per cent more power than the maximum which they will dissipate in the normal use of the equipment.

C-9. Transformers and Coils. All audio and power transformers and coils which carry direct current shall be designed (for normal use) to carry, for at least hours, without damage to themselves or any other part of the equipment, at least per cent more direct current than the maximum they carry in the normal use of the equipment. All and coils shall be so designed that,

when in their place in the equipment, they will safely handle their required power and peak voltage without damage to themselves or any other part of the equipment. All and coils shall be capable of withstanding a minute application of an voltage (with frequency not greater than cps.) with an rms value equal to times the normal operating voltage between any two or any and parts or ground. However, if the operating voltage is greater than volts, then the test voltage shall be volts greater than twice the operating voltage. All transformers and coils shall be and so as to be capable of withstanding temperatures and humidity of both tropical and cold climates.

D-3a. Ambient temperatures outside the truck, of to plus °C.

E-2f(6). Frequency Stability. There shall not be more than cycles drift below kc., nor more than % above, under the first minutes of locked key operation after the filaments have been turned on for at least minutes. This should hold where the ambient temperature is ° to °F., and the line voltage is between and volts.

When victory is assured the new Hallicrafters Communications receivers will have the latest electronic developments ... all of the precision craftsmanship and advanced construction principles made possible by extensive research on our Military units. Your new post-war Hallicrafters receivers will possess performance qualities that will be worth waiting for.



the hallicrafters co.
CHICAGO, U. S. A.

keep communications open!

NOVEMBER, 1942 *

RADIO

RADIO

Published by RADIO MAGAZINES, INC.

Editor

M. L. MUHLEMAN

Business Staff

Lee Robinson, Publisher
and President

S. R. Cowan, Business Manager
and Treasurer

M. L. Muhleman, Vice President
and Editor

R. Alan, Circulation Manager

CORRESPONDENCE and ORDERS should be sent only to our New York office. MANUSCRIPTS, if unsolicited and unusable, will not be returned unless accompanied by a stamped, self-addressed envelope.

EXECUTIVE, editorial, and advertising offices of Radio Magazines, Inc., are located at 132 West 43rd Street, New York, N. Y., to which address all correspondence, advertising copy and cuts should be directed.

SUBSCRIPTION RATES (in U. S. funds): Two years, \$5.00, or \$3.00 yearly in U.S.A. To Canada and all foreign countries, \$4.00 yearly. Twelve issues yearly; back issues are not included in subscriptions.

NOTE: Because of wartime censorship restrictions, we must reserve the right to withhold from foreign subscribers any issue the regular domestic edition of which is not approved by the authorities for export without changes. In such cases subscriptions will be extended so that each subscriber will eventually receive the number of issues to which he is entitled.

IF YOU MOVE, notify us in advance; we cannot replace copies sent to your old address. Notice must be received by the 20th of the month preceding the cover date of first issue to go to the new address.

NOVEMBER 1942

No. 274

Table of Contents

COVER

An able-bodied seaman, Bill Williams of San Diego, California, captain of a gun crew who is now holding down a hot spot at sea. He can dish it out—and is in the process of doing so with the aid of communications equipment.

ARTICLES

Notes on Frequency Modulation—C. F. Nordica	9
High-Frequency Sweep Circuits—M. van Arkel	11
FM-Station Performance—C. H. Wesser	14
Radio Design Worksheet: No. 7—Power and Bridging Losses	17
U.H.F. Oscillators—C. R. Stoll	18
New Tube Types 1C21, 934, 935	20
Q. & A. Study Guide	22
Radio Bibliography: 7—Remote Control, Part 1—F. X. Rettenmeyer	29

MISCELLANEOUS

Editorial	7
War Bond Drive	16
New Products	24
News	46
Advertising Index	50

RADIO (title registered U.S. Pat. Off.) is published monthly at 34 N. Crystal Street, East Stroudsburg, Pa., by Radio Magazines, Inc., Executive and Editorial Offices at 132 West 43d Street, New York, N. Y. Subscription rates—United States and Possessions, \$3.00 for 1 year, \$5.00 for 2 years; elsewhere \$4.00 per year. Single copies 35c. Printed in U.S.A. All rights reserved, entire contents Copyright 1942 by Radio Magazines, Inc. Entered as Second Class Matter October 31, 1942, at the Post Office at East Stroudsburg, Pa., under the Act of March 3, 1879.

RADIO

★ NOVEMBER, 1942

5

"FIGHTING" MICROPHONES

in the Din of Battle



In a Flying Fortress . . . in a General Grant . . . in a battleship or a shell hole . . . when the Microphone switch is pressed — the message must get through! Millions of lives may depend on it. This is the supreme test. Microphones made by Shure Brothers are in action on fighting fronts all over the world. Shure Microphones pass this supreme test because they have survived engineering and production tests more destructive than conditions they meet in service. These "Fighting Mikes" do their part in serving the cause of Freedom.

SHURE BROTHERS

Designers and Manufacturers of Microphones and Acoustic Devices

225 West Huron Street, Chicago, U. S. A.

EDITORIAL

THE GREMLINS

★ We wouldn't bother to mention the Gremlins at all, except that they have presumably invaded the radio field. We'd prefer to ignore them, as Gremlins and Fifinellas (female Gremlins) love to be talked about, particularly if it has to do with some mischief they've been up to. But we've received disturbing reports of Gremlins snapping rubber bands at mikes, sliding down radio beams, sending out false messages, and creating static interference.

The Gremlins are little folk and, according to *Time*, were first discovered by the R.A.F., the first one having been seen—if we are to believe the *Cosmopolitan*—by a pilot called Gus. More recently it has been reported by *The New York Sun* that Gremlins are an old story to the boys at Boeing Aircraft, which proves beyond contention that the little folk are not peculiar to Britain.

Usually, says *Time*, Gremlins are about a foot high, wear tight green breeches, red jackets and stocking caps, and have pointed ears. Other sources claim Gremlins have horns, like a bull, but the Boeing people insist that all Gremlins have a Pitot tube, which acts as an air-speed indicator, attached to the tops of their heads—which goes to show that no one really knows much about Gremlins anyhow.

An eminent radio engineer is of the belief that what the Boeing people have confused as a Pitot tube is nothing less than a quarter-wave Marconi; and he is of the opinion that the Gremlins originally sprung from the square root of minus one. He offers as a support of this theory the persistent reports that Gremlins drill holes into plane receivers, climb in, and have all sorts of sport playing b.f.o.

All sources, however, are agreed on two points; 1) that Gremlins can be seen and heard only by aircraft pilots and their associates, and, 2) they do not make their presence known to *any* of the enemies of the United Nations—so you can see that, as mischievous as Gremlins may be, they do not carry secrets to the Axis Powers.

The R.A.F. has instituted Training Schools for Gremlins and Fifinellas to make them good and helpful. No doubt training centers also will be opened over here; and it's about time! The little folk are multiplying like rabbits and over-running almost everything. There has, for instance, been a wave of errors in technical publications, and as early as August, *Electronics* reported on their editorial page the existence of a Jinx who threw some type away on them. It was unquestionably a Gremlin. In our own case, we had a Fifinella who played hob with Doppler's Principle

(page 48, September RADIO) and left the impression that a plane flies backwards, like a Dodo Bird.

We wish to caution radio manufacturers that Gremlins have been using Widgets (baby Gremlins) to unscrew padders after receivers have come off the production testing line. If this difficulty is experienced, the solution is to spread Grape Nuts around on the test benches for the little folk to eat. What happens is, they glut themselves and fall asleep.

Bibliography

Battle of Europe, *Time*, September 14, 1942, page 37.
The Gremlins, *Cosmopolitan*, December, 1942, page 37.
American Gremlins, *New York Sun*, November 2, 1942, page 25.
The Gremlins, *Life*, November 16, 1942, page 93.

RELAXATION

★ We were surprised to learn recently that many of our readers, both in and out of the armed forces, often turn to RADIO for relaxation. Things they like best are, "Radio Design Worksheet" and "Q. & A. Study Guide." They're used as self-imposed quizzes, and woe to us if we make errors, as we sometimes do, for we soon hear about it—and from the strangest places.

Relaxation is very important these days. One friend of ours finds peace and diversion in walking his dog after dinner and solving equations up till bedtime. Another friend plays imagineering in his spare moments, and reports that he's sunk the Jap navy five times over with a special radio torpedo he cooked up in his head.

We go in for word games. If you have nothing better to do, take the word RESISTANCE and see how many four-or-more letter words you can extract from it, like "since", for instance. You ought to get one hundred, at least.

SNAFU

★ We live in a nation where one half doesn't know what the other half is doing. Most everything in radio, for instance, is hush-hush, and this makes for a situation where the boys in the know are miles out in front of the civilian.

This, of course, is for the best, but Americans have the delightful habit of attaching fond names to new things. Hence, when the war is over, the boys on the outside won't understand the language of the boys who've been on the inside, and everything will be what the Navy might well call Snafu.

M.L.M.



Loud Speaker Maker for the Armed Forces

"Engineer a loud speaker for battleships!"

"Engineer a loud speaker to go in training tanks!"

"Engineer a loud speaker for submarines!"

"Engineer a loud speaker for command cars!"

"Engineer a loud speaker for landing barges!"

*Those are just a few of the instructions Jensen has
received since America decided to make war its business.*

*Unsurpassed design and production facilities have made
Jensen "Loud speaker maker for the armed forces."*

In addition to the great honor, it is invaluable experience.

RADIO  **Jensen**
MANUFACTURING COMPANY
6601 South Laramie, Chicago

NOTES ON FREQUENCY MODULATION

C. F. NORDICA

★ Modulation can be accomplished by operating on any of the three parameters of a wave; namely, amplitude, phase, or frequency. All three types of modulation have been analyzed in the technical press. It is the purpose of this article to call attention to some of the pertinent characteristics of frequency modulation.

Modulation Distinctions

The generalized expression for an alternating current is:

$$I = A \cos (\omega t + \theta) \quad (1)$$

This current may be modulated by arranging for the signal current to operate on the amplitude A of expression (1) while the frequency $\omega/2\pi$ and phase θ of the carrier current remain constant. This is called amplitude modulation.

In amplitude modulation the instantaneous amplitude of the carrier is at all times proportional to the instantaneous amplitude of the signal current. Likewise, in phase modulation, the phase θ is at all times proportional to the instantaneous amplitude of the signal current, amplitude and frequency of the carrier remaining constant. In frequency modulation the instantaneous amplitude of the signal current is employed to vary the instantaneous frequency of the carrier, while phase and amplitude are constant.

The expression for an amplitude-modulated current consisting of a carrier current modulated by a single frequency signal current (for simplicity) is well known. It may be derived by substituting the formula for the signal current for the peak value of the carrier current A in (1). Let the signal current be:

$$KA \cos pt$$

Substituting in expression (1) we have:

$$I = KA \cos pt \cos (\omega t + \theta) + A \cos (\omega t + \theta)$$

For simplicity assume: $\theta = 0$; then:

$$I = A (1 + K \cos pt) \cos \omega t = A \cos \omega t + AK/2 \cos (\omega - p) t + AK/2 \cos (\omega + p) t \quad (2)$$

In expression (2), K is known as percentage modulation, the first term to the right of the equality sign is the carrier, and the two remaining terms the sidebands. It is obvious that the amplitude of the modulated wave varies between a peak of $(1 + K) A$ and a minimum of $(1 - K) A$ during modulation. If $K = 1$ (100% modulation):

$$(1 + K) A = 2A \\ (1 - K) A = 0$$

Obviously this is equivalent to a carrier of constant amplitude and two signal-bearing sidebands symmetrically disposed on either side of the carrier in the frequency spectrum, the frequency interval separating either sideband from the carrier being equal to the signal frequency. See Fig. 1.

Phase Modulation

The expression for a phase-modulated wave may be derived in a similar manner. Substituting in (1) we have:

$$I = A \cos \{ \omega t + \theta (1 + K \cos pt) \} \quad (3)$$

Which reduces to:

$$I = A \cos (\omega t + \theta) \cos (K\theta \cos pt) - A \sin (\omega t + \theta) \sin (K\theta \cos pt)$$

Expanding the sine and cosine terms in accordance with their power series:

$$\sin \theta = \theta - \frac{\theta^3}{|3|} + \frac{\theta^5}{|5|} - \frac{\theta^7}{|7|} + \dots$$

$$\cos \theta = 1 - \frac{\theta^2}{|2|} + \frac{\theta^4}{|4|} - \frac{\theta^6}{|6|} + \dots$$

yields:

$$I = A \cos (\omega t + \theta) - AK\theta \sin (\omega t + \theta) \cos pt + \frac{AK^2\theta^3}{2} \cos (\omega t + \theta) \cos^2 pt + \frac{AK^2\theta^3}{6} \sin (\omega t + \theta) \cos^3 pt + \dots \quad (4)$$

A term-by-term comparison of expressions (2) and (4) indicates that

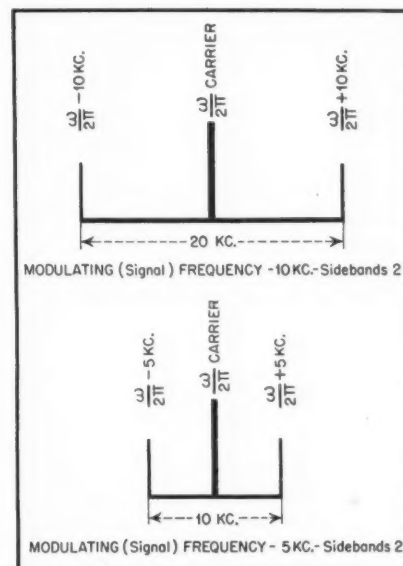


Fig. 1. Signal distribution for amplitude-modulated wave with constant percentage modulation for two modulation frequencies.

the phase-modulated current contains a carrier $[A \cos (\omega t + \theta)]$ of constant amplitude, frequency and phase; two first-order sidebands $[AK\theta \sin (\omega t + \theta) \cos pt]$ essentially similar to those of expression (2); together with a number of higher order sidebands consisting of the carrier modulated by harmonics of the signal frequency. See Fig. 2. Here it may be recalled that:

$$\begin{aligned} \cos^2 pt &= \frac{1}{2} \cos 2 pt + \frac{1}{2} \\ \cos^3 pt &= \frac{1}{4} \cos 3 pt + \frac{3}{4} \cos pt \\ \cos^4 pt &= \frac{1}{8} \cos 4 pt + \frac{1}{2} \cos 2 pt + \frac{3}{8} \end{aligned}$$

$$\begin{aligned} \sin^2 pt &= \frac{1}{2} - \frac{1}{2} \cos 2 pt \\ \sin^3 pt &= \frac{3}{4} \sin pt - \frac{1}{4} \sin 3 pt \\ \sin (pt + \pi/2) &= \cos pt \end{aligned}$$

It will be noticed that in the phase-modulated current the first and other odd-ordered sidebands are displaced $\pi/2$ radians from their position in an amplitude-modulated current. Thus the current of expression (4) applied to an ordinary detector would yield no signal output, until the phase of the carrier was shifted. Thus as the relative phase of the carrier was shifted to $\pi/2$ radians from its normal phase, the output would continually increase, being maxi-

mum for a carrier phase shift of $\pi/2$ and decreasing again as the phase was shifted beyond $\pi/2$.

Frequency Modulation

The expression for a frequency-modulated wave can be derived as were the expressions for amplitude and phase modulation by substituting for the frequency term. The common expression for a frequency-modulated current is:

$$I = A [J_0 M \sin \omega t + J_1 M \{\sin(\omega + p)t - \sin(\omega - p)t\} + J_2 M \{\sin(\omega + 2p)t - \sin(\omega - 2p)t\} + \dots] \quad (5)$$

In this case the J 's are Bessel functions of the first kind and of the order indicated by the subscript. The quantity M represents the variation of frequency of the carrier from the unmodulated mean value, divided by the modulating (signal) frequency. This is

$$M = \frac{\Delta f}{F}$$

$$\text{when } f = \frac{\omega}{2\pi}$$

Δ = variation of f

$$F = \frac{p}{2\pi}$$

The quantity M is usually referred to as the modulation index and may be compared, with certain reservations, to percentage modulation in amplitude modulation. Of course the modulation index can be and frequently is greater than unity, whereas percentage modulation (K) never exceeds unity. Like phase-modulated currents, frequency-modulated currents consist of several sets of sidebands. See Fig. 3.

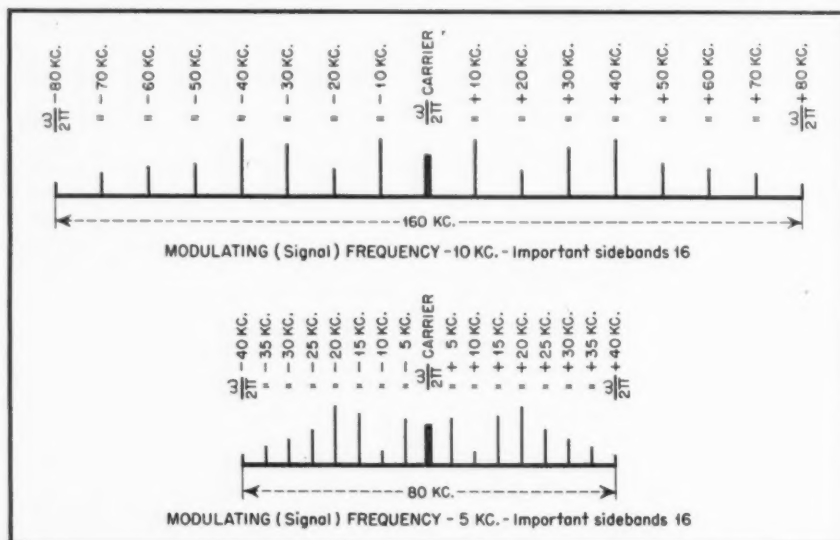


Fig. 2. Signal distribution for phase-modulated wave with constant phase variation for two modulation frequencies. Phase deviation constant. Only important energy-bearing sidebands shown.

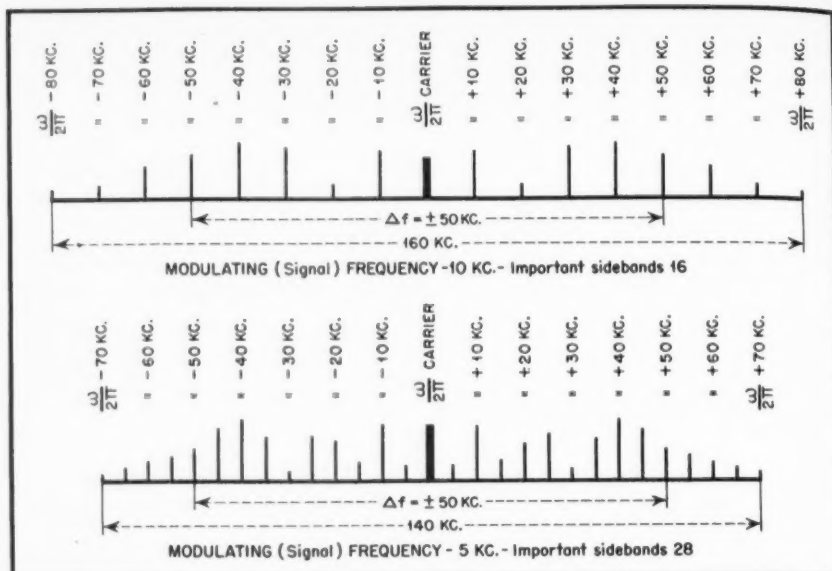


Fig. 3. Signal distribution for frequency-modulated wave with constant frequency variation for two modulation frequencies. Frequency deviation constant. Only important energy-bearing sidebands shown.

PM-FM Distinctions

If the modulation index is less than unity, then the amplitude of the first set of sidebands will be approximately proportional to M , while the amplitude of the higher order sidebands will be negligible. When the modulation index exceeds unity, the higher order sidebands become of more importance, in that they carry more energy, while the carrier amplitude drops rapidly.

From the foregoing it is apparent that phase modulation, while bearing many resemblances to frequency modulation, is by no means identical with frequency modulation. Or, to put the matter another way, phase and frequency modulation may be regarded as two somewhat dissimilar aspects of the same phenomena. In frequency modulation the extent of the frequency de-

viation is determined solely by the amplitude of the modulating signal. In pure phase modulation the extent of the phase deviation is proportional to both the amplitude and frequency of the modulating signal.

For example, in frequency modulation two modulating signals of 50 and 500 cycles of the same amplitude acting individually would produce identical frequency deviations. In phase modulation, however, the 500-cycle signal would produce 10 times the phase change of the 50-cycle signal. This situation was recognized by early investigators, and is corrected by pre-distorting networks which attenuate high signal frequencies with respect to low ones before modulation in so-called phase-frequency modulation transmitters. In a pure frequency-modulated transmitter such a network would not be required for this purpose. Such a network could, of course, be included in the receiver instead of the transmitter. An expedient frequently used in f-m systems to improve signal-to-noise ratio lies in pre-emphasizing high audio frequencies at the transmitter and employing a conjugate network at the receiver to emphasize the low audio frequencies with respect to those of a high order.

Inasmuch as the relative phase of the carrier in frequency modulation is in quadrature with respect to the carrier in amplitude modulation, interfering amplitude modulations, such as atmospherics, is much reduced in frequency-modulation systems. This is one of the noteworthy advantages of frequency modulation over amplitude modulation.

Fundamental Differences

From the foregoing it is evident that

[Continued on page 43]

HIGH-FREQUENCY SWEEP CIRCUITS

M. VAN ARKEL

★ The popular sweep circuit employing a gas triode serves well in many applications, but it suffers from instability and frequency limitation. Due to the fact that the ionization in such a tube takes a small but definite length of time, the maximum frequency obtainable is somewhere near 25 kc. Even at these frequencies, the return stroke takes too great a proportion of the cycle.

Greater reliability and higher sweep frequencies can be obtained with circuits employing high-vacuum tubes. Such circuits, however, are more complicated and also have some disadvantages. For instance, it is very difficult to obtain the sudden large discharge current with ordinary vacuum tubes. This results in the back trace taking a longer time so that it becomes visible. Also, changing the frequency involves varying more circuit constants than in circuits with gaseous discharge tubes. As a result, the sweep circuit with high-vacuum tubes is employed when high sweep frequencies are required, or where high stability at a limited number of frequencies is needed.

Linear sweep circuits employing high-vacuum tubes may be divided into groups depending upon their principle of operation. In this article we shall describe four groups, as follows: 1) blocking an oscillator; 2) adapting the multivibrator; 3) using an oscillator

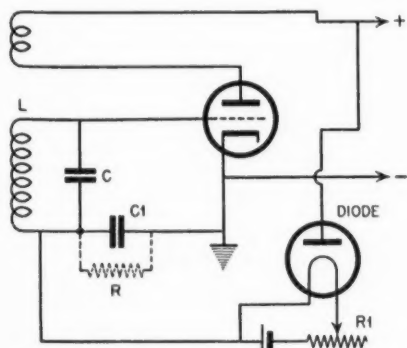


Fig. 1. Circuit of one of the simplest forms of blocked-oscillator sweep circuit.

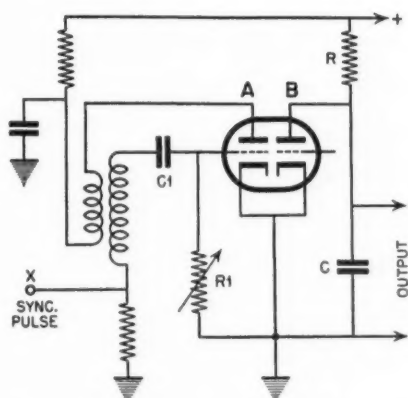


Fig. 2. Blocked-oscillator sweep circuit used in RCA television receivers.

with a discharge tube; 4) changing the shape of a sine wave.

Blocked Oscillators

One of the simplest forms of blocked-oscillator sweep circuit is shown in Fig. 1. This arrangement is due to Appleton, Watson-Watt and Herd (*Proc. Royal Soc. A.* Vol. 103, p. 84, 1923 and Vol 111, p. 615 and 654, 1926). The LC circuit of the oscillator is designed to resonate at a frequency much higher than the desired sweep frequency. Due to the large time constant of the grid-leak and condenser combination, the oscillator grid is blocked after the first or second cycle. The charge then leaks off through the grid leak until the grid bias becomes so low that oscillations can start again. After the first few cycles the grid is again blocked and the procedure repeated.

The sweep voltage is taken from across the grid condenser, $C1$. If an ordinary grid resistor R were used, the discharge voltage would fall exponentially. Therefore, a fixed rate of discharge is insured by the use of a saturated diode instead of a resistor. This diode is shown in the diagram and might be considered as being "biased" by the B-supply. The rate of discharge is adjusted by the diode filament rheostat $R1$.

Several variations and refinements of this system are in use. In Fig. 2, it is shown how this arrangement is employed in the RCA television receivers TRK-9 and TRK-12.

To explain the action let us begin at that part of the cycle where the triode oscillator A blocks. At that time the grids of both tubes are biased beyond cut-off and there is no plate current in triode B . Consequently, the condenser C will charge up through resistor R at an exponential rate. At the same time the charge on the grid condenser $C1$ will leak off through $R1$. When the grid condenser has been so far discharged that plate current starts flowing, tube A breaks into oscillation. There is then a short positive pulse on the grids and a sudden large plate current in tube B which discharges condenser C . The cycle is then repeated.

The sweep voltage is taken from across the condenser C . The charging period should be adjusted so that it does not permit the condenser to charge to more than about 20% of the supply voltage before discharge occurs. The first part of the exponential curve being nearly straight, this is the easiest way of providing a linear rise of voltage.

The frequency of the circuit is entirely dependent on the time constant $C1-R1$ in tube A , and may be slightly varied by the synchronization pulses applied at X . If the same voltage output and the same waveform are to be expected from the circuit, the ratio of $R-C$ to $R1-C1$ should remain fixed.

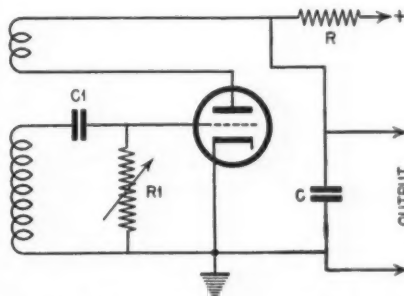


Fig. 3. Single-tube blocked-oscillator sweep circuit, otherwise the same as Fig. 2.

Sweep frequencies up to 500 kc are claimed for this circuit.

It is possible to have the two jobs which are performed by tubes A and B in Fig. 2, done by a single tube, as in Fig. 3. The same tube serves both as oscillator and as discharge tube. The action is practically the same as described above. Condenser C charges and is periodically discharged as the tube breaks into oscillation. Waveforms of the grid voltage and plate voltage are shown in Fig. 4.

Going one step farther in the evolution of the blocked oscillator, there is shown in Fig. 5 a circuit which allows a push-pull voltage to be taken from a single blocked-oscillator tube. It is done by dividing the charging resistance in two parts, R1 and R2, which are in the plate circuit and cathode circuit respectively. This oscillator is also interesting because of the coils L1 and L2 in series with the charging resistors. The presence of

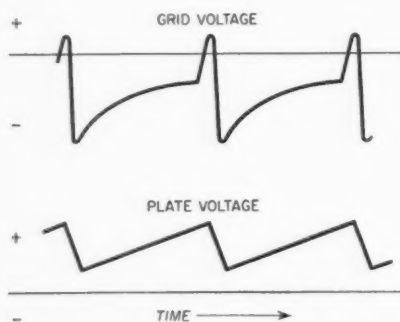


Fig. 4. Voltage waveform of Fig. 3 circuit.

the coils tends to keep the charging currents equal and aids in getting a linear charging rate. The condenser can then be charged to a higher voltage—more than 1/5 of the supply voltage—and still retain linearity. This circuit was described by Kallman in the *Proceedings of the IRE*, Vol. 28, No. 8, August, 1940.

Multivibrator Types

The ordinary multivibrator can be used as a sweep oscillator but a special

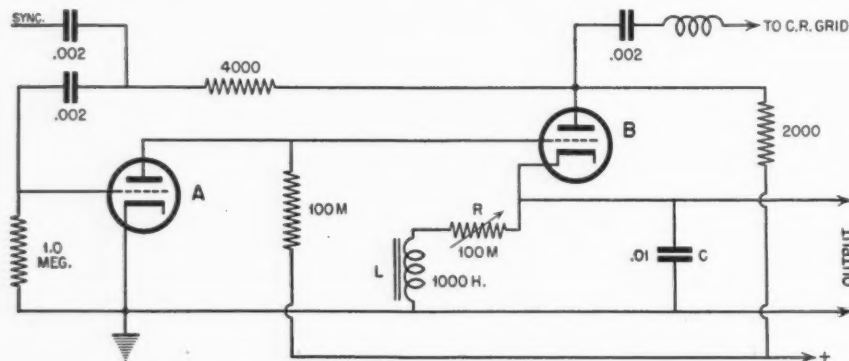


Fig. 6. Diagram of multivibrator used as sweep oscillator circuit.

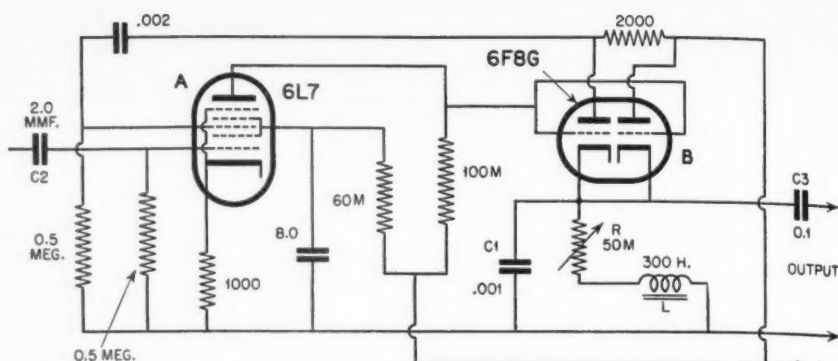


Fig. 7. Another multivibrator sweep oscillator. Values are for 13,230 cycles. At 60 cycles, C1 is .25 μ f., L is 2000 h., R is 100,000 ohms, C2 is .005 μ f., and C3 is .25 μ f.

arrangement has to be made to change the waveshape to a sawtooth form. One of these, due to Puckle, is illustrated in Fig. 6. It differs from a conventional multivibrator by the addition of the components C, R and L in the cathode lead of the second triode.

The operation is as follows: Assume that at a given time the plate current in tube B is rising. This increasing plate current causes a decrease in plate voltage at tube B, a decrease in grid voltage in tube A and a decrease of plate current in tube A. Therefore, the plate voltage of tube A rises and the grid voltage of tube B also rises, reinforcing the original increase in plate current in tube B. Due to the rise in plate current in tube B, the grid bias increases—since it consists of the voltage drop across L and R—until finally the tube is biased to the point of plate-current cutoff.

The charge on condenser C then leaks off through R and L, the proportion of these two constants keeping the discharge linear. This continues until the tube starts to draw plate current again. This sudden rise in plate current starts the same train of events as before, increasing the plate current until cutoff occurs again and the cycle repeats.

The frequency is determined approximately by the constants R, L and C. The synchronizing pulse allows some variation. The other constants of the circuit need not be changed with frequency. There is no objec-

tion to using a double triode for the purpose, a 6F8G being suitable.

This type of circuit has been employed for television deflection and was described in this connection by Wilder, in *QST*, for February, 1938. The sudden voltage surges occurring at the plate of tube B are suitable for blanking the return trace.

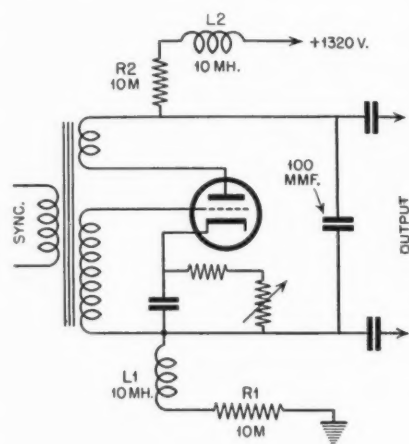


Fig. 5. Push-pull voltage blocked-oscillator.

A modification of the multivibrator circuit of Fig. 6 was suggested by Dumont, and is illustrated in Fig. 7. Here a second tube is connected in parallel with tube B, except for the plate circuit. The result is that the rise in plate current passing through R and L is greater and the time of the return trace is reduced. Values of the constants for a 60-cycle sweep and for the horizontal sweep are given in the diagram caption.

Potter's Circuit

Another variation of the multivibrator, as shown in Fig. 8, was devised by Potter (*Proc. IRE*, Vol. 26, No. 6, June, 1938). It can operate at frequencies from a few cycles per second to about 100 kc.

The operation is rather complicated, but briefly it is as follows: When the plate voltage is applied (the tubes having no bias) there is a sudden rush of plate current in both tubes. Condenser

$C1$ charges through Rb and $R1$, but shortly the charge passes through the grid circuit of tube B rather than through $R1$. Due to the voltage drop across the bias resistor and across Rb , the plate current in tube A is eventually cut off. However, tube B continues to draw plate current and $C1$ therefore charges. During this charge the voltage drop across Rb and $R1$ is progressively reduced until the grid voltage on tube B becomes negative and tube A starts drawing current,

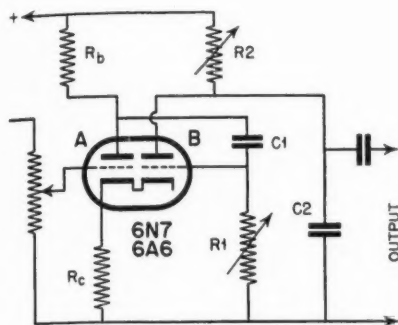


Fig. 8. Potter's sweep circuit.

thus discharging $C1$. During this period $C2$ charges through $R2$; and this constitutes the forward stroke of the sweep.

The cycle is then repeated. The voltage across $C2$ is practically a perfect sawtooth form. The frequency is approximately $f = .4R1/C1$, while the amplitude is determined by $R2$ and $C2$. In the circuit shown by Potter, an amplifier tube is used after this oscillator. It was omitted in Fig. 8 so as to avoid confusion.

Oscillator-Driven System

A high-frequency sweep circuit employing a discharge tube which is

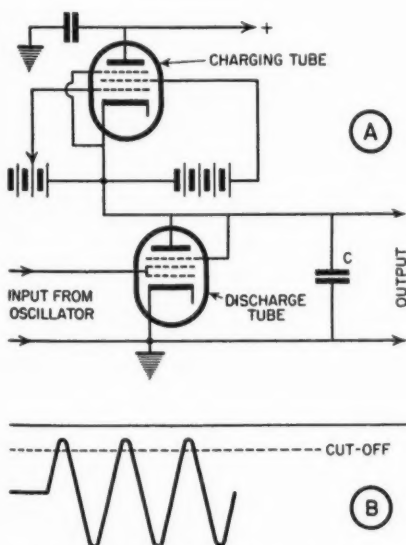


Fig. 9. High-frequency sweep circuit using discharge tube. Grid waveform shown at B.

Fig. 11. In this sweep circuit, oscillator signal is clipped by diodes, with resultant waveform as shown in Fig. 12.

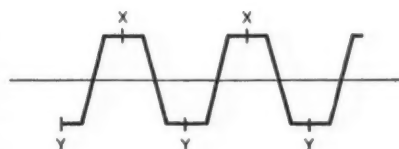
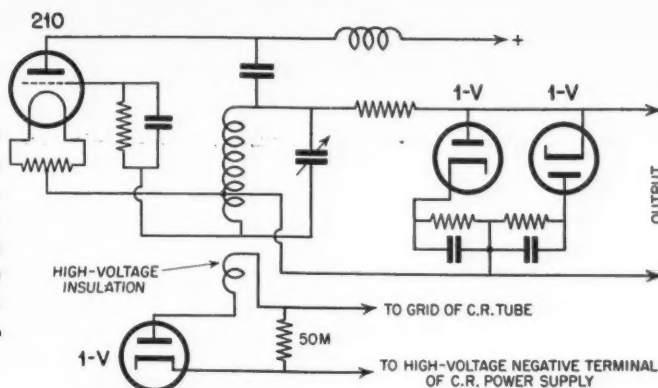


Fig. 12. Waveform of Fig. 11 sweep circuit.

Shaping the Sine Wave

Leeds (*Proc. IRE*, Vol. 24, No. 6, June, 1936) described an interesting way of changing the shape of a sine wave so that it can be used as a linear sweep circuit for higher frequencies.

The sine-wave shape (Fig. 10) is nearly straight for one-sixth of a cycle near the middle of its stroke from A to B . Leeds used only this part of the cycle as the forward stroke; the rest of the cycle is suppressed, and therefore the observed phenomenon must be at a frequency which is at least 6 times the sweep frequency.

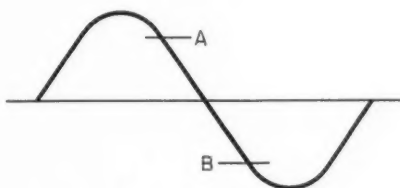


Fig. 10. Part of sine wave used as sweep.

The circuit is shown in Fig. 11. The signal from an oscillator is first fed through two diodes which clip off the peaks so that the resultant waveform is that of Fig. 12. The return trace from X to Y is suppressed by a voltage applied to the grid of the cathode-ray tube so as to suppress the beam. This voltage is picked from the oscillator in the correct phase, rectified, and applied to the grid.

Other Sweep Circuits

It is sometimes desirable to obtain a very long sweep, to observe transients, for instance. For this purpose,

[Continued on page 44]

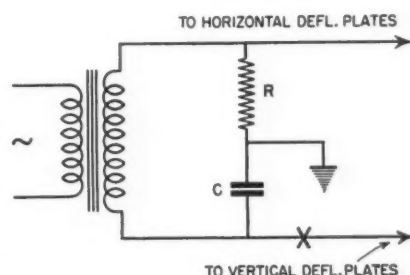


Fig. 13. Circuit providing circular sweep.

FM-STATION PERFORMANCE

C. H. WESSER

Chief Engineer, W45D

★ Paragraph 6 of the Application for High-Frequency Broadcast Station License (FM), FCC Form 320, has to do with Proof of Performance of Audio-Frequency Operating Characteristics, and appears quite easy to satisfy. Actually, with requirements that are much stiffer than AM station performance requirements, and with little precedent and measuring equipment now available, furnishing the required proof of performance in accordance with the Standards of Good Engineering Practice Governing FM Broadcast Stations is not entirely a simple matter.

Performance Requirements

The proof of performance requires that "All measurements shall be made with the equipment adjusted for normal program operation and shall include all circuits between the main studio microphone terminals and the antenna output, including telephone lines, pre-emphasis circuits and any equalizers employed, but excluding the

compensated microphone amplifier, if used." The measurements required include the following:

(a) Audio-frequency response in decibels above and below response at 1000 cycles for frequencies of 30, 50, 100, 400, 1000, 5000, 10,000 and 15,000 cycles with modulation of 25, 50, 75, and 100 percent.

(b) Extraneous noise level (exclusive of microphone and studio noises), in decibels (unweighted r.m.s.) below 100-percent frequency modulation. (The noise-measuring equipment shall have substantially uniform response in the range from 30 to 15,000 cycles).

(c) Extraneous noise level as in (b), except amplitude modulation.

(d) Audio-frequency distortion (r.m.s. harmonic) at 50, 100, 400, 1000, 5000, 10,000 and 15,000 cycles at 100-percent modulation.

Complete data, diagrams and graphs together with descriptions of measurement procedure must be furnished. For 100-percent modulation in connection with the above measurements, a fre-

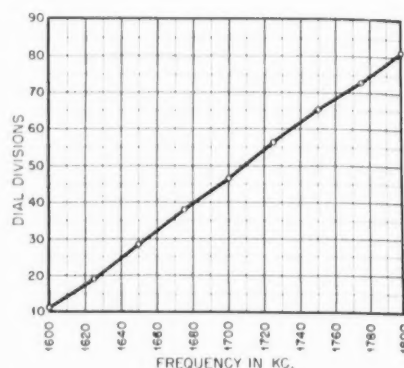


Fig. 2. Calibration curve of heterodyne meter.

quency swing of ± 75 kc shall be used.

To anyone familiar with performance requirements of AM broadcast stations, it is at once apparent that FM requirements are considerably harder to meet, except for the inherent advantages that FM offers over AM in several respects. Producing the proof of performance is sometimes difficult because FM station engineers must devise their own methods of making the required measurements, and for every piece of equipment used in making these measurements performance must be proved, if the equipment has not already been approved by FCC (Little of this equipment has been approved, or is commercially available.)

Audio-Frequency Response

Since a-f response must be measured at four different percentages of modulation, it is obvious that these modulation percentages must first be accurately established. At this writing there has been no modulation monitor approved for FM by the FCC, although one manufacturer offered such a monitor for sale last year. It is doubtful if these are still available.

If no monitor is available, the swing must be established by some other means. One way of measuring swing

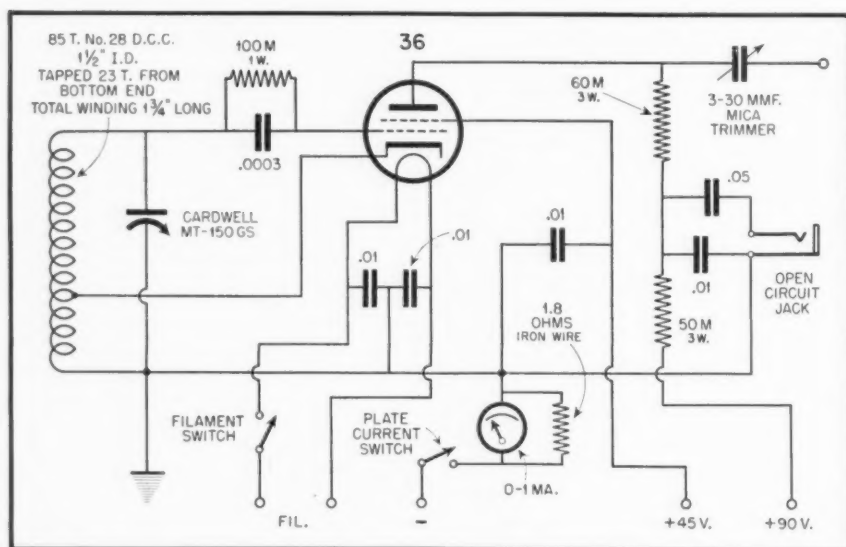


Fig. 1. Diagram, with parts values, of heterodyne meter. Variable condenser has 15 stator plates, but only 8 rotor plates, 3 of which are swung 180° on shaft in relation to remaining 5 plates, providing small tank capacity across coil.

will be described here, since it has been used at W45D for some time, and is very satisfactory once the operator is thoroughly familiar with the method and procedure of measuring, and with the equipment involved. A comparatively simple and very stable heterodyne frequency meter was constructed with the midpoint of its frequency range at the intermediate frequency of the FM receiver with which it is used, and the high and low limits of its range at approximately 100 kc above and 100 kc below the midpoint, or i-f, frequency.

Fig. 1 shows the diagram of the heterodyne meter. As long as a reliable standard is available against which the calibration of this meter can be checked, it is only necessary that it hold calibration during the period that is required to make the actual swing measurements. Since the receiver used at W45D for all measurements is an REL 517 with an i.f. of 1700 kc, the range of the heterodyne meter was made to run from 1600 to 1800 kc, with an extra ten dial divisions or more at each end of this range to avoid having to operate too closely to the ragged edges of the tuning condenser.

The calibration curve of this meter, Fig. 2, was made against a General Radio type 620-A Heterodyne Meter-Calibrator. This meter was checked against WWV just prior to making the band-spread heterodyne meter calibration. It has since been found that the band-spread meter holds calibration over periods of months if it is handled carefully, and is treated as a piece of measuring equipment deserves to be treated. The fact that this meter holds calibration so well is undoubtedly due,

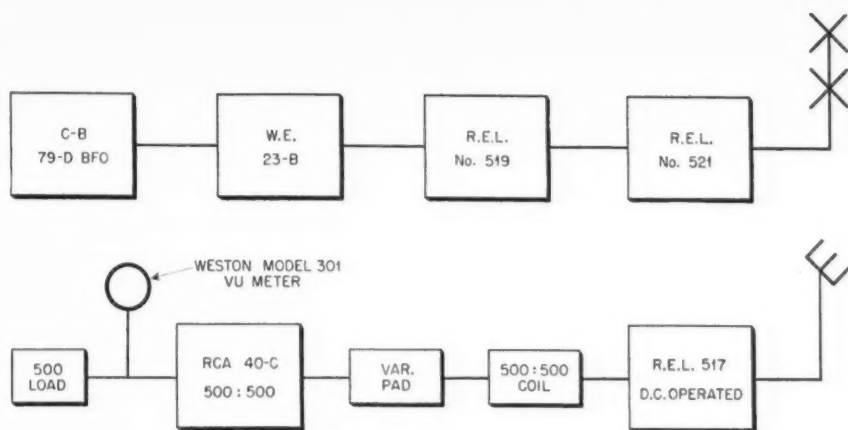


Fig. 4. Equipment line-up in block form, used for noise level checks and measurements.

in part, to its construction of heavy aluminum, reinforced with brass angles at all corners. Its A and B batteries are self-contained in another shielded compartment, and a check on total space current of the tube, each time it is used, is made to make sure that everything is in proper working condition.

Once the heterodyne meter is calibrated, we have a source of r.f. that can be used also for calibrating the discriminator of the receiver, to make certain that its operation is linear. The calibration of the discriminator is, in effect, the plotting of the r-f input to it at various frequencies within the range of the i-f ± 75 kc, which is considered equal to 100-percent modulation. This is done by lightly coupling the output of the meter to the last i-f stage of the receiver, and at the same time reading the discriminator output voltage on a VT voltmeter, and repeat-

ing this process at small frequency intervals over the entire range of the i-f ± 75 kc.

Fig. 3 shows the equipment line-up in block diagram, and the curve of the discriminator that resulted after careful adjustment of it and the receiver. It is interesting to note that the final curve of the discriminator of the REL 517 receiver is straight from 1620 kc to 1780 kc, and virtually straight from 1600 to 1800 kc.

To measure the swing of the transmitter, the heterodyne meter is again loosely coupled to the i-f amplifier of the receiver while a steady tone is being fed into the transmitter, with the receiver carefully tuned to the transmitter frequency. By slowly scanning the entire frequency range of the heterodyne meter, "birdies" will be heard all across the range over which the carrier is swung. By carefully going to outer frequency limits of the meter that still barely give a beat between it and the frequency-modulated carrier, that limit of swing can then be read directly from the calibration curve of the meter, at once establishing swing in terms of kilocycles plus and minus unmodulated carrier, and therefore in percent.

Making frequency-response curves at 25, 50, 75 and 100-percent modulation is then a simple matter of reading meters at the mike input terminals of the speech input equipment that feeds the transmitter, and at the output of the test receiver.

Extraneous Noise Level Measurements

Fig. 4 shows the equipment line-up used for the noise-level checks and measurements. The speech input-transmitter arrangement is the one normally used for program transmission. The measuring set-up includes the REL 517 receiver, whose frequency response is known to be flat within less than 1 db from 25 to 16,000 cycles. This receiver

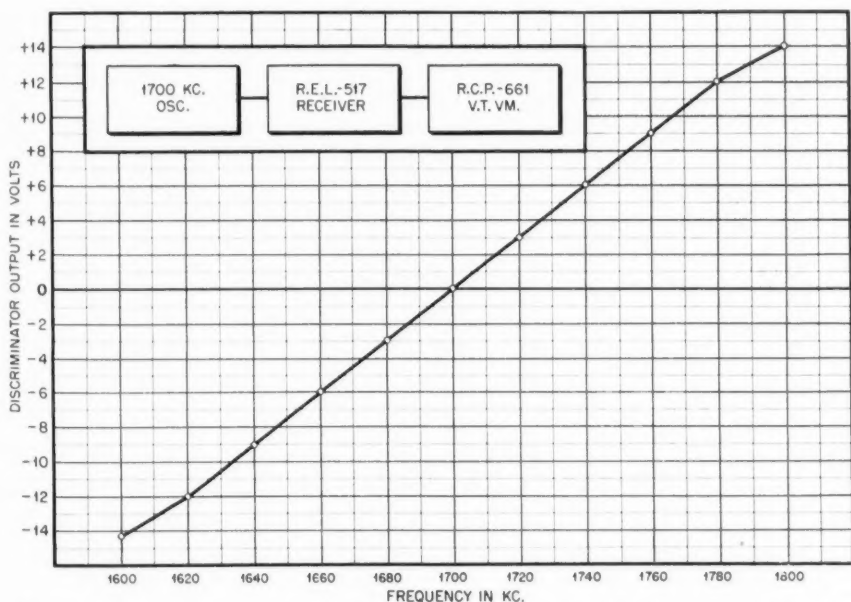


Fig. 3. Equipment line-up in block diagram form, and the discriminator curve resulting from careful adjustment.

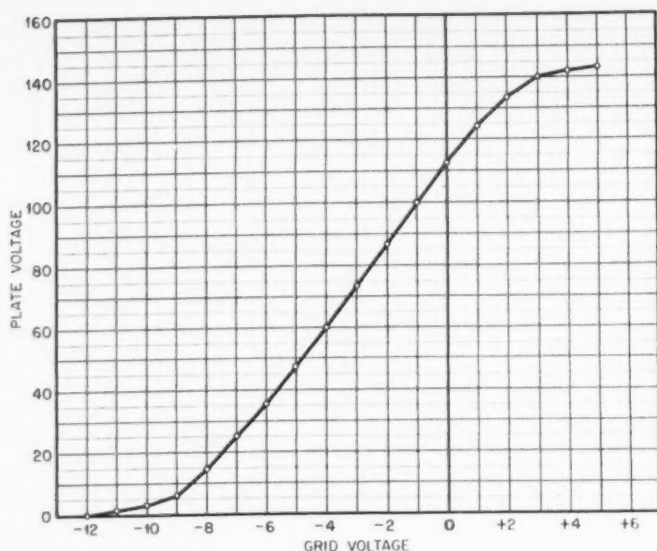


Fig. 5. Grid voltage-plate voltage curve of tuned grid circuit bias detector, as measured across plate load resistor, and used for AM noise-level measurements.

was worked into an RCA type 40-C amplifier through a matching coil and variable pad. The output of 40-C amplifier was terminated in 500 ohms, its intended load impedance, with a VI meter connected across its output. Since the response of the measuring equipment must be substantially uniform over the range of 30 to 15,000 cycles, a frequency run was made on this amplifier to prove its response, and was found to be safely within the required limits.

With all equipment set up, the transmitter was modulated at 100 percent with a 1000-cycle tone, and the 40-C amplifier gain control adjusted to give zero-level output. With no modulation, but with all controls set at normal program settings, the output at the 40-C was found to be 66 db below zero level output at 100 percent, thus establishing the overall noise level of the entire program channel, including the transmitter and measuring equipment. The receiver limiter grid was then grounded, and the noise level at the output of the 40-C checked. It was better than 90 db down, proving that the noise-measuring set-up did not materially contribute to the overall noise measured.

For the purpose of noise-level measurements the REL receiver was entirely battery-operated. Switches were installed permanently on the back of this receiver to allow similar operation whenever noise-level checks are made, and without any undue loss of time.

AM Noise-Level Measurements

For these measurements a simple 6L5 bias detector with a tuned grid circuit was assembled, and the grid voltage-plate voltage curve plotted (as measured across the plate load resistor). This curve is shown in Fig. 5. The RCA 40-C amplifier was used in

connection with this detector and measurements were made as follows:

Sufficient r-f voltage from the radiator of the transmitter was picked up by the resonant grid circuit of the detector to give a d-c drop of 10 volts across the plate load resistor. A measured gain of 25 db was needed in the 40-C amplifier behind the detector to produce an output level of zero. From the curve in Fig. 5 we find that a grid voltage of 3.5 is indicated when 10 volts is developed across the plate load resistor. Multiplying the grid voltage by 2 to simulate 100-percent (AM) modulation conditions of the carrier, the resulting 7 volts on the grid shows a corresponding plate voltage of 48, again taken from the curve. This corresponds to a level of approximately 34 db. The 25-db gain of the 40-C amplifier plus the 34-db level measured across the plate load resistor equals 59 db, which is the level of the AM noise below 100-percent conditions.

A-F Distortion Measurements

Since these measurements must be made at various frequencies from 50 to 15,000 cycles, there is no substitute for the use of a wave analyzer or regular distortion meter that covers the prescribed range. With the proper equipment available, these measurements are easily made. If no such measuring equipment is available, it appears that the only thing left to do is to request that the FCC waive this portion of the proof of performance until such time as the necessary equipment becomes available once again, which will not be until after the war. Under such circumstances the Commission may waive the requirements that cannot be met because of lack of proper equipment, under a Commission action of August 4, 1942. Of course, in cases where waiving of any portion of the

requirements is requested, it becomes necessary that the applicant or licensee state, under oath, that he will comply with the Rules and Standards of the Commission just as soon as availability of equipment and material make it possible for him to do so.

Since the Standards require that the combined distortion does not exceed 2 percent at 100-percent modulation, it is impossible to make the measurements by any other means than with equipment designed for that purpose. To satisfy our own curiosity, photographs were taken of 'scope patterns of the output of a beat-frequency oscillator and the output of the test receiver while the transmitter was being modulated at 100 percent with the same frequency, and from the same b-f oscillator. It was interesting to note that no distortion shows on these photographs, indicating that the method (and particularly the 'scope) is incapable of showing up low percentages of distortion of the order of 2 percent and less—the reason why this method is not acceptable as part of the proof of performance.

WAR-BOND DRIVE

WANTED—YOUR IDEAS!

As the Treasury Department's special six weeks' War Bond Payroll Savings Campaign progresses from November 15th to New Year's Day, the War Savings Staff is anxious to secure as many ideas as possible on how different companies are planning to put across their individual drives for 10% of payroll.

These ideas in turn will be passed on to companies to aid them in reaching the mutual objective before New Year's Day.

The continued success of the War Savings Campaign depends on the Payroll Savings Plan, which has proved the most effective means of insuring the systematic purchase of War Bonds by millions of workers. Consequently, the War Savings Staff is trying to complete the job of signing up every wage earner for 10% through the Payroll Savings Plan not later than the first day of 1943.

Help the national campaign, first by putting over the drive in your own company, and then by telling the War Savings Staff how you did it. Send this vital information to Payroll Savings Division, War Savings Staff, Treasury Department, 709 12th Street, N. W., Washington, D. C.


RADIO DESIGN WORKSHEET

No. 7—POWER & BRIDGING LOSSES

POWER LOSS

Problem 1: Determine the formula relating the power loss in decibels and ratio between source and sink resistances.

Solution: Assume a circuit in which sink resistance Z is equal to the generator resistance R . In the circuit shown:

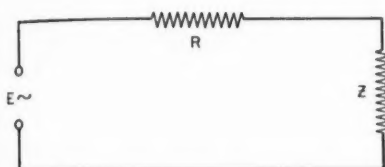

$$\text{Current } I_1 = \frac{E}{R + Z_1} = \frac{E}{2R} \text{ if } Z_1 = R$$

Let power dissipated in load $Z_1 = P_1$

$$P_1 = Z_1 I_1^2 = \frac{Z_1 E^2}{4R^2} = \frac{E^2}{4R} \text{ if } Z_1 = R$$


$$\text{When } Z \text{ is not } = R \quad I_2 = \frac{E}{R + Z}$$

$$P_2 = \frac{Z E^2}{(R + Z)^2}$$

$$\frac{P_1}{P_2} = \frac{E^2}{4R} \times \frac{(R + Z)^2}{Z E^2} = \frac{(R + Z)^2}{4RZ} \quad (1)$$

Let $r = \frac{Z}{R}$ and substituting $Z = Rr$ in (1)

$$\text{we have: } \frac{P_1}{P_2} = \frac{(R + rR)^2}{4R^2 r} = \frac{R^2 (r + 1)^2}{4R^2 r} = \frac{(r + 1)^2}{4r}$$

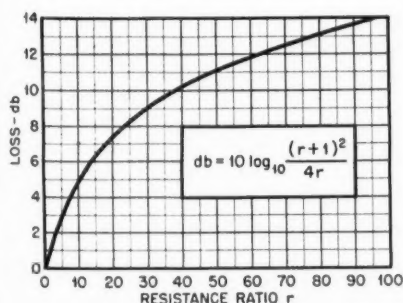


$$\text{db loss is: } db = 10 \log_{10} \frac{(r + 1)^2}{4r}$$

A plot of this relation is shown in the accompanying graph.

BRIDGING LOSS

Problem 2: Determine the bridging loss due to a series resistance inserted between source and sink. Assume source or generator resistance is equal to the sink or termination resistance (the usual case); and let X equal the series resistance inserted, as in the accompanying diagram.

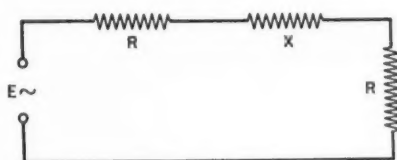

Solution: When $X = 0$

$$I_1 = \frac{E}{2R} \quad P_1 = R I_1^2 = \frac{R E^2}{4R^2} = \frac{E^2}{4R}$$

When X is finite

$$I_2 = \frac{E}{X + 2R} \quad P_2 = R I_2^2 = \frac{R E^2}{(X + 2R)^2}$$

$$\frac{P_2}{P_1} = \frac{R E^2}{(X + 2R)^2} \times \frac{4R}{E^2} = \frac{4R^2}{(X + 2R)^2}$$

$$\text{loss in db} = 10 \log_{10} \frac{4R^2}{(X + 2R)^2} =$$

$$10 \log_{10} \frac{4}{(r + 2)^2} \text{ if } r = \frac{X}{R}$$

This relation is plotted in the graph of Fig. 1.

An application of Problem 2 may be found in the transmission of audio signals over short lengths of line, say under 1000 feet. This problem often arises in broadcast studios, public-address systems, etc.

The accompanying table shows the resistance per 1000 feet of various sizes of copper wire. This is d.c. resistance,

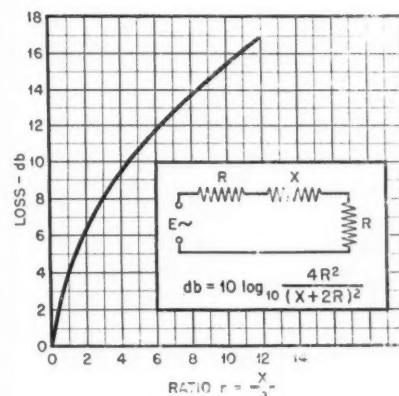


FIG. 1.

but for relatively short circuits the audio a.c. resistance is equal to the d.c. resistance for all practical purposes.

Since a metallic circuit consists of two wires, the resistance per circuit foot is double the resistance per wire foot. Substituting the resistance for X in Fig. 1, we have the data shown in Fig. 2 for a 5-ohm circuit.

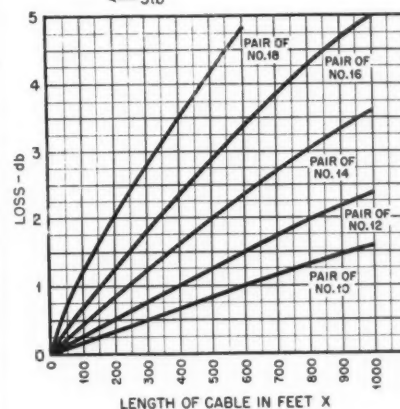



FIG. 2.

Wire Resistance Table

Wire size B & S gage	Ohms per M ft.	Wire size B & S gage	Ohms per M ft.
10	1.0	22	16.2
11	1.26	23	20.4
12	1.6	24	25.7
13	2.0	25	32.4
14	2.6	26	40.86
15	3.12	27	51.52
16	4.02	28	64.97
17	5.07	29	81.92
18	6.39	30	103.3
19	8.29	31	127.3
20	10.16	32	164.26
21	12.8	33	207.1

U. H. F. OSCILLATORS

C. R. STOLL

★ The term "ultra high frequencies" has been defined as that part of the radio spectrum between 30 and 400 megacycles.

Many suitable methods for generating these frequencies using vacuum tube oscillators have been devised, a few of which will be explained.

A brief review of circuits reveals that any one of four types of oscillators are commonly used in all standard radio equipment. There are, in the order of importance, the Hartley; Tuned Plate-Tuned Grid; Colpitts and Tickler Feedback Circuit (Fig. 1). Of these, three are useful on ultra-high frequency. The Tickler Feedback Circuit, which has considerable merit on low and medium frequencies, becomes impractical on high frequencies because of the decreasing size of L/C circuits.

For ultra-high frequency superheterodyne receivers, the first three circuits illustrated in Fig. 1 are often used as local oscillators with the conventional coil and condenser tuned circuit. This gives satisfactory results if high sta-

bility is not required, as is the case of narrow band beat-note reception. If cw reception is attempted, a very rough note will be heard due to small continual variations of the oscillator frequency. This results from minute mechanical vibrations of the tuned circuit and inefficient oscillator operation, since considerable energy must be fed back to the grid circuit to sustain oscillation on these frequencies with conventional tubes.

Requirements

Analyzing oscillator requirements we find that stability and/or power output are the two major points to strive for in all equipment. In an oscillator for a signal generator or superheterodyne, stability is usually the only requisite. For communication purposes we want both. It is not possible to get high stability and high power output simultaneously, so, when both are desired, a compromise must be reached. Methods for accomplishing this will be described later.

To analyze further, it is evident that the stability of an oscillator is a function of the "Q" of the oscillator tuned circuit. This also governs the power output, and this will be considered presently. Consequently, for high stability, the tuned circuit should be designed for the best "Q" possible.

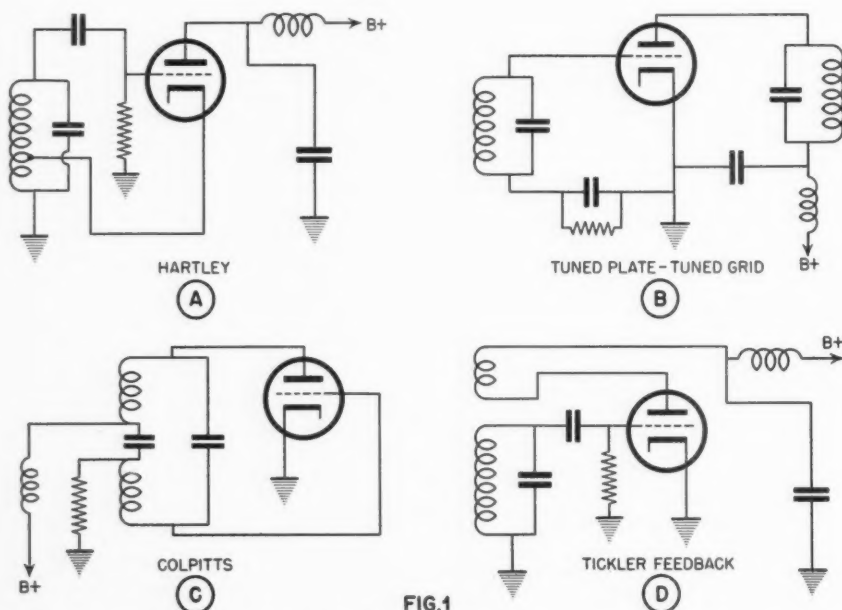


FIG. 1

The four most commonly used oscillator circuits. Of these, three types are useful at ultra-high frequencies, the tickler feedback type not being satisfactory because of the decreasing size of the L/C circuits.

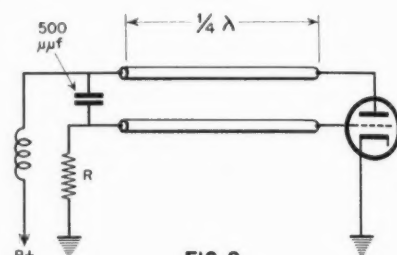


FIG. 2

Quarter-wave resonant line oscillator circuit.

This means that the r.f. resistance of the coil should be low, necessitating the use of a large conductor since high-frequency current flows only on the outer surface. Another essential is large inductance compared to the capacity of the circuit. This is the stumbling block in all ultra-high frequency oscillators since the tube capacity is the limiting factor as we go higher and higher in frequency. Even at best, the "Q" of a coil-condenser circuit leaves much to be desired.

The use of quarter-wave resonant lines as tuned circuits permits high values of "Q" which, if utilized correctly, will give stability comparable with crystal control. Several versions of these are shown in Figs. 2, 3 and 4.

It is possible to reach usable "Q" values in the neighborhood of 5,000 to 10,000 using resonant lines, since this construction minimizes skin effect. This may be easily seen since, as the frequency is increased, the length of the line decreases faster than the skin effect increases. As a result "Q" increases with frequency.

Two types of lines have been commonly used; the concentric (Fig. 3), and the two-conductor type (Figs. 2, 3 and 4-A).

In the construction of these it is desirable that large conductors be used. For the open-wire type, half-inch copper tubing will be sufficient for most applications. The spacing is critical for optimum results. A distance equal to the diameter of the tubes gives about the best performance for all-round use. For a concentric line, the inside diameter of the outer tube should be three or four times larger than the outside radius of the inside conductor. A quarter-inch tube inside a one-inch tube would work well. The tubes should be shorted together at the bottom end and supported concentrically at the top end by low-loss discs of polystyrene or similar insulation. Connection to the inner conductor is made through a hole in the outer tube (Fig. 3).

Line Considerations

Since resonant lines if properly constructed are high "Q" circuits, care must be exercised when they are coupled to the oscillator tube if the "Q" is to be preserved for stability reasons. Fig. 2 shows a Colpitts type line oscillator in which the grid and plate are connected directly across the open end of the line. This permits the tube to work into a maximum impedance—since a high-"Q" circuit is a high-impedance device—and to deliver optimum power output. The shunt-loading effect of the tube, however, loads down the resonant line and reduces the "Q". Consequently, the full "Q" value cannot be realized for stability. The result is high output with moderate stability.

Fig. 3 illustrates a concentric tuned-plate tuned-grid version. In this case the line is placed in the grid circuit and the grid tapped off about $\frac{1}{3}$ up from the shorted end. A decrease in line loading results and the operating "Q" is almost as great as the "Q" of the line by itself. This method gives maximum stability at some sacrifice in power output since full exciting voltage is not supplied to the grid. A condenser-coil combination is used in the plate circuit since this is not a controlling factor. The "Q," and naturally the impedance of the plate circuit, is lower than that which could be obtained with a resonant line and, as a result, the power output will be less than if a line plate circuit were used.

A push-pull oscillator making full use of lines is shown in Fig. 4-A. Here the grid circuit is the tapped version to give optimum stability; whereas the plate circuits take advantage of the maximum circuit impedance for optimum output. Even though the plates are direct connected to the ends of the line, the loading on the line is only

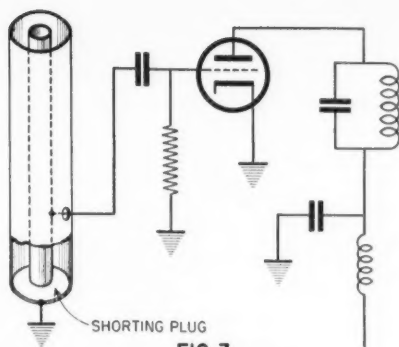


FIG. 3
Concentric-line tuned oscillator circuit

half of that in Fig. 2, since the tubes are operated in series. This circuit is best suited for ultra-high-frequency operation.

One of the drawbacks of resonant lines is the necessity of adjusting "sliding bars" in the case of open-wire lines, or "tuning plugs" on concentric lines, to resonate them at the desired frequency. A practical arrangement is illustrated in Fig. 4-B to simplify tuning. A small split-stator condenser of 10 to 30 μf per section is shunted across the line about 10 percent up from the shorted end. If the line has been designed to be slightly shorter than required, it can be resonated nicely with the condenser. The shunt capacity reduces the "Q" a small amount since it is across only a small portion of the line.

Coupling to resonant lines is best accomplished by a hairpin loop about one quarter the length of the line. This may be fed directly to an impedance-type feeder or tuned for Zepp antenna connection.

A word or two is in order about grid leaks. An old rule to find the best grid leak value is to multiply the grid leak resistance in ohms by the grid current. The resistance which gives the highest product is the best value. This applies for all tubes and circuits. Most tubes require values between 5,000 and 50,000 ohms.

Receivers

Since conventional receivers employ oscillators, it is fitting that some consideration be given them.

Resonant lines have been used extensively in all types of power oscillators and amplifiers, but receivers have been given little attention. Super-regenerative receivers are ideally suited for lines since usually only one tuned circuit is employed. Needless to say, any of these receivers can use more selectivity. Lines will go a long way to sharpen up these "megacycle meanderers."

The circuit of Fig. 2 is easily converted to a receiver simply by increasing the grid leak R to $\frac{1}{2}$ or 1 megohm, using a 6J5 as a detector. Tuning may be accomplished by making the 500 μf condenser at the far end variable. With this type of series tuning, signals will appear broad at the high-capacity end of the condenser and sharp at the other end. This is not an indication of selectivity, but simply a characteristic of this type of tuning. Actually there will be little difference in selectivity at either end. The virtue of this tuning method is that it is non-critical if operated at half setting, giving an excellent band-spread effect.

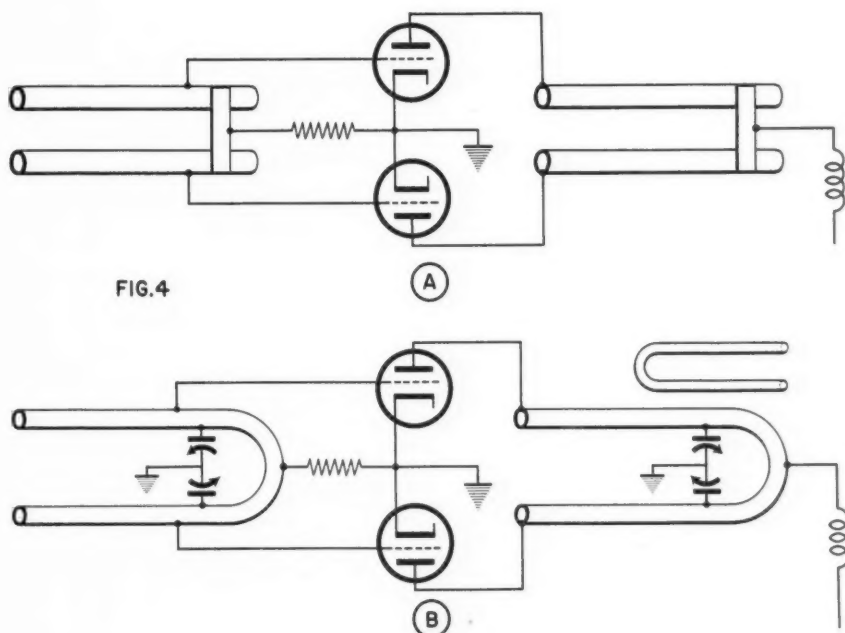


Fig. 4-A. Push-pull oscillator making full use of resonant lines. Fig. 4-B. An improved version of A, using tuning condensers rather than sliding shorting bars.

NEW TUBE TYPES

★ The RCA Manufacturing Co., Inc., are making available to equipment manufacturers seven new tube types for use in connection with WPB rated orders. In numerical sequence the types are: 1C21 Gas-Triode, 2AP1 High-Vacuum Cathode-Ray Tube, 5R4-GY Full-Wave High-Vacuum Rectifier, 6AG5 (Miniature) R-F Pentode Amplifier, 6J6 (Miniature) Twin Triode, 934 Vacuum Phototube, 935 Vacuum Phototube.

The specific electrical and mechanical characteristics, and applications of these seven new types are as follows:

1C21 GAS-TRIODE

The RCA-1C21 is an ionic-cathode, glow-discharge triode designed for use primarily as a relay tube. The discharge can be initiated with a very small amount of electrical energy applied to the grid circuit. The 1C21 may also be used as a voltage regulator, or as a relaxation oscillator. The bulb is sprayed with an opaque coating so that incident light will not affect the breakdown characteristics.

Breakdown Characteristics

The voltage conditions necessary for breakdown between any two electrodes

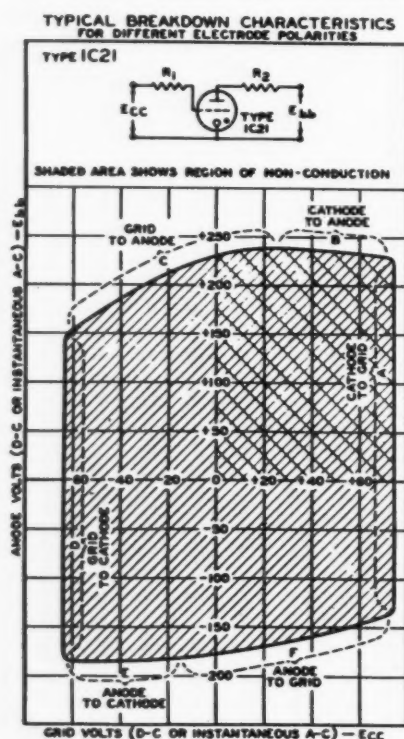


Fig. 1. 1C21 breakdown characteristics.

Tentative Characteristics

Peak Anode Breakdown Voltage (Grid tied to cathode)	180 min.	Volts
Peak Positive Grid Breakdown Voltage	66 min.	Volts
D-C Anode Extinction Voltage	80 max.	Volts
A-C Anode Extinction Voltage (RMS—60 cycles)	73 approx.	Volts
Grid Current (for transition of discharge to anode at 100 volts peak)	115 approx.	Volts
Anode Voltage-Drop	25 av.	Microamp.
Grid Voltage-Drop	50 max.	Microamp.
	73 approx.	Volts
	55 approx.	Volts

Maximum Ratings

Maximum Ratings Are Design-Center Values

Peak Cathode Current	100 max.	Milliamp.
D-C Cathode Current	25 max.	Milliamp.
TYPICAL OPERATION AS RELAY TUBE:		
D-C Anode-Supply Voltage*	125-145	Volts
Peak Positive Grid-Bias Voltage	66 max.	Volts
Peak Grid-Signal Voltage	40 min.	Volts
Sum of Grid-Bias and Grid-Signal Voltages (Peak)	100 min.	Volts
D-C Grid Current	100	Microamp.

* If a-c supply is used, the rms voltage applied to the tube should not exceed 100 volts for a line supply voltage of 117 volts.

in the 1C21 are described by the closed curve of Fig. 1. Consider the test circuit shown with the curve. A voltage E_{cc} is applied to the grid through a high resistance R_1 ; a voltage E_{bb} is applied to the anode through a load impedance R_2 . From the typical curve, it will be noted that for values of anode voltage less than approximately +237 volts, no discharge is initiated until the grid voltage is approximately +74 volts. When this value is reached, a discharge between cathode and grid is initiated. This condition is shown by section A (above zero ordinate) of the breakdown characteristics curve.

When the anode voltage is increased to +237 volts, a breakdown occurs between cathode and anode. The value of anode voltage required for this breakdown is substantially independent of grid voltage for values of grid voltage greater than approximately +25 volts, and less than +74 volts. Section B shows the relation between anode voltage and grid voltage which is necessary for a cathode-anode discharge.

Section C shows the relation between anode voltage and grid voltage which is required for a grid-anode discharge. In this discharge, the grid acts as a cathode, so that the slope of section C would be approximately 45 degrees were there no third electrode in the tube. This discharge can occur with positive values of grid voltage, because the distance between anode and grid is less than that between anode and cathode.

Section D shows the relation between anode and grid which is required for a grid-cathode discharge. It should be

noted that this discharge takes place between the same two electrodes as in section A. However, under the conditions of section D, the grid electrode acts as a cathode, because it is negative with respect to the cathode electrode.

AVERAGE TRANSITION CHARACTERISTIC

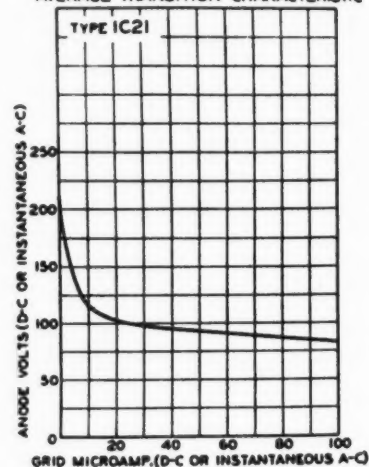


Fig. 2. 1C21 transition characteristic.

Sections E and F shows the relations between anode and grid which are required to initiate an anode-cathode discharge, and an anode-grid discharge, respectively. In these cases as in the previous ones, the first word of the term describing the discharge denotes the electrode acting as cathode.

The previous conditions, as indicated, are all on the basis that breakdown occurs between any two electrodes without the assistance of any ionic discharge current. For example, a dis-

charge between cathode and anode is initiated when the anode voltage is +237 volts and the grid current is zero. When the voltage applied to the grid is increased so that grid current flows, the discharge between cathode

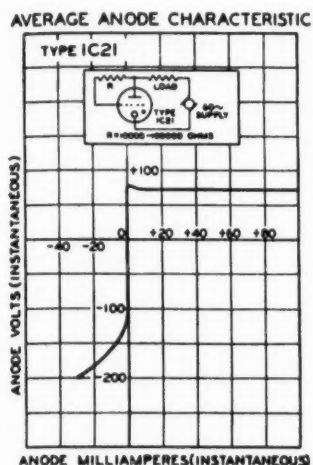


Fig. 3. 1C21 anode characteristic.

and anode can be initiated at values of anode voltage less than +237 volts. For each value of grid current, there is a corresponding value of anode voltage necessary to initiate the main discharge between cathode and anode. Because it is convenient to think of the discharge to grid as transferred to the anode when sufficient anode voltage is applied, the relation is termed the *transition characteristic* and is given in Fig. 2. In practice, it is desirable to have a current of at least 100 microamperes flowing to the grid.

When the value of anode voltage is less than the voltage drop across the tube (anode voltage-drop), the transfer of the main discharge cannot take place.

The anode characteristic of the 1C21 is given in Fig. 3. This curve, obtained with a cathode-ray oscillograph, shows that over the useful operating range, the anode voltage-drop remains substantially constant at 73 volts. The




Fig. 4. 1C21 socket connections.

curve also shows, because of its asymmetrical shape, that the 1C21 can be used as a rectifier. In such use, the peak inverse voltage should not exceed 180 volts. Operation at d-c anode cur-

rents less than 5 milliamperes is not recommended because of instability.

The 1C21 is designed for operation only in the area of the breakdown characteristics curve shown by double cross-hatching. Although the tube will function in other regions, as previously described, its operation in these regions is unstable because of design characteristics.

Installation and Application

The base of the 1C21 fits the standard octal socket which may be installed to hold the tube in any position.

When the 1C21 is used in relay service, provision should be made to supply to the grid a signal voltage adequate to take care of voltage-supply regulation, tube variation, and manufacturing variation in the equipment itself.

The typical operating data shown in the tabulation are for the 1C21 when used as a relay tube with a d-c voltage supply which may vary from 125 to 145 volts. The corresponding values of bias voltage and grid-signal voltage have been chosen to take care of this voltage range as well as other variations. The required amount of peak grid-signal voltage can be reduced substantially either by reducing the supply-voltage range, or by adjusting the equipment to take care of differences between individual tubes, or by utilizing a combination of these two methods. Fig. 4 shows socket connections.

934 VACUUM PHOTOTUBE

The RCA-934 is a small high-vacuum phototube intended primarily for use in sound and facsimile equipment but it is also suitable for light-operated relays and light-measuring equipment. Its S-4 photosurface has exceptionally high response to blue and blue-green radiation and a negligible response to red radiation. Socket connections are shown in Fig. 5.

Tentative Characteristics

Cathode	Semi-cylindrical
Cathode Photosurface	S4
Cathode Window Area	0.4 sq. in.
Direct Interelectrode Capacitance	1.5 μ f
Bulb	T-5-1/2
Base	Peewee 3-Pin
Mounting Position	Any

Maximum Ratings

Maximum Ratings Are Absolute Values

Anode-Supply Voltage (D.C. or Peak A.C.)	250 max. Volts
Anode Current ¹	10 max. Microamp.
Ambient Temperature	50 max. °C
Sensitivity ²	30 Microamp./lumen
D-C Resistance of Load:	
For 250-volt anode-supply voltage	1 min. Megohm

¹ On basis of the use of a rectangular sensitive cathode area 17 mm by 7.5 mm.

² Sensitivity value (see Fig. 6) is given for conditions where a Mazda Projection Lamp operated at a filament color temperature of 2870°K is used as a light source. The method of determining sensitivity employed a 250-volt supply and included a 1.0-megohm load resistance. With daylight, value is several times higher; to light from a high-pressure mercury arc, many times higher.

The socket of the 934 should be mounted so that light is intercepted by the concave surface of the cathode.




Fig. 5. 934 socket connections.

Exposure to intense light, such as direct sunlight, may decrease the tube's sensitivity even though there is no voltage applied. The magnitude and duration of the decrease depend on the length of exposure. Permanent damage to the tube may result if it is exposed to radiant energy so intense as to cause excessive heating of the cathode.

Shielding of the 934 and its leads to the amplifier is recommended when amplification is high. The leads from the phototube to the amplifier should always be as short as possible to minimize capacitance loss and pick-up from stray fields. Since the tube is a high-resistance device, it is important that insulation of associated circuit parts and wiring be adequate.

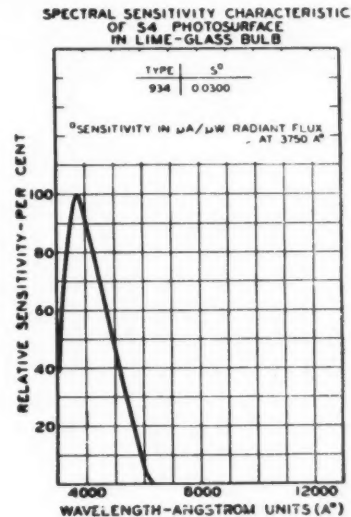


Fig. 6. 934 spectral sensitivity.

When maximum sensitivity of phototube circuits is important, special care should be taken to keep the leakage resistance of circuit parts and wiring insulation high.

935 VACUUM PHOTOTUBE

The RCA-935 is a high-vacuum phototube possessing extraordinarily high sensitivity to radiant energy rich in blue and near ultraviolet and will re-

[Continued on page 42]

Q. & A. STUDY GUIDE

—Theory and Practice

243. Why does the output of a d.c. generator generally require less filtering than the output of a rectifier system?

Though substantially a direct current, the output of a rectifier system contains an a.c. component, in the form of pulsations having definite waveform. This current, rising and falling at a definite frequency, constitutes an a.c. ripple. It is essential, therefore, to employ a fairly elaborate system of filtering, using condensers and chokes or resistors, to smooth out the a.c. ripples.

The output of a d.c. generator is an interrupted direct current of fairly constant value. Such slight variations as are present (commutator ripple) are readily smoothed out by a comparatively simple filter system.

244. When filter condensers are connected in series, resistors of high value are often connected across the terminals of the individual condensers. What is the purpose of this arrangement?

The two condensers, series-connected, may not have identical capacity and leakage values, causing unequal voltage distribution (and the possible breakdown of one of the condensers). By connecting resistors of high value across the terminals of the series-connected condensers, the voltage across each condenser is equalized.

245. Draw a diagram of a bridge type, single phase, rectifier employing mercury-vapor type tubes and con-

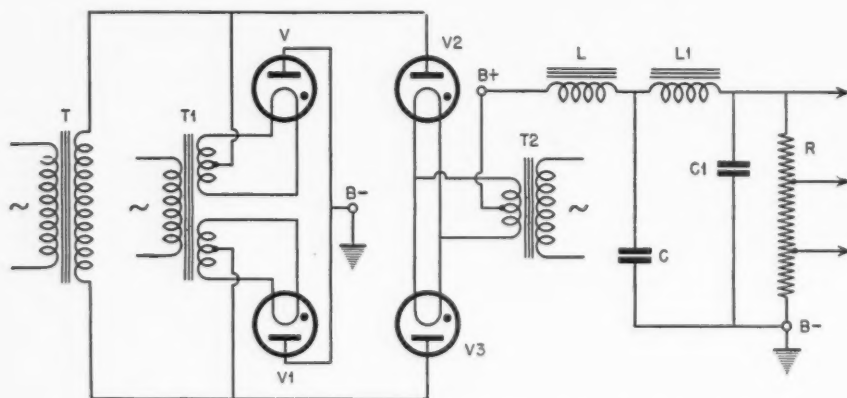


Fig. 1. Diagram of bridge type, single phase mercury-vapor rectifier power supply.

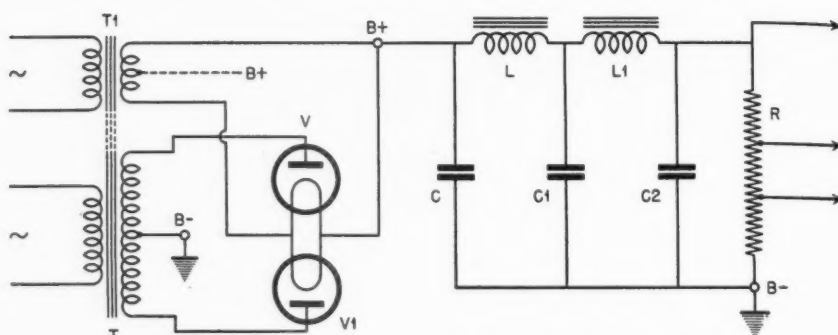


Fig. 2. Diagram of full-wave, single phase thermionic rectifier power supply.

nected to a choke-input, two-section filter system, including a bleeder resistance.

Such a diagram is shown in Fig. 1. Though separate filament power sources are required for tubes V and V1, and V2-V3, the filament windings of T1 and T2 could form a part of the high-voltage transformer T, with a single primary serving all secondaries. However, where high power is involved, separate transformers are more economical.

In a bridge rectifier of this type, the secondary voltage of transformer T is approximately equal to the desired load voltage, whereas in a full-wave rectifier system with center-tapped secondary, the desired load voltage is equal to one-half the total secondary voltage.

The choke-input, two-section filter consists of the chokes L and L1, and the condensers C and C1. Resistor R is the bleeder, which may be used as a voltage divider, for the purpose of providing different voltages to various circuits.

246. Draw a diagram of a full-wave, single-phase, rectifier employing thermionic vacuum tubes, connected to a condenser-input, two-section filter, and including a bleeder resistance.

The diagram of such a rectifier system is shown in Fig. 2. The transformers T and T1 may be separate units, or may be one transformer with single primary, as indicated by the dotted core lines.

The high voltage may be taken from one side of the filament transformer winding, or from a center tap on this winding, as indicated by the dotted line. If considerable current is drawn, and a single, full-wave rectifier tube employed, it is preferable to take the high voltage from a center tap on the filament transformer winding, for the sake of distributing the load current on both sides of the filament. This is also good practice where two half-wave rectifier tubes are used in a full-wave circuit, as in Fig. 2.

The two-section, condenser-input, filter in this circuit consists of the chokes L and L1, and the condensers C, C1 and C2. The bleeder resistor R may be used as a voltage divider.

247. Draw a diagram of a half-wave rectifier system employing a thermionic rectifier tube and a two-section, condenser-input, filter system.

Such a diagram is shown in Fig. 3. The units T and T1 may be a single power transformer, with one primary. The filter system is the same as that shown in conjunction with the full-wave rectifier (Fig. 2), but does not necessarily have the same values of inductance and capacitance; for in the full-wave rectifier, which makes use

[Continued on page 41]

**"IT'S A SWELL PLACE FOR MY
ECHOPHONE EC-1 AND BESIDES,
SHE LIKES TO GET POLICE CALLS"**




Echophone Model EC-1 6 tubes, 3 bands. Tunes from 550 kc. to 30 mc. Beat frequency oscillator. Bandsread logging scale. Self-contained speaker. Electrical bandsread on all bands. AC/DC. 115-125 volts. ECHOPHONE RADIO CO., 201 EAST 26TH ST., CHICAGO, ILLINOIS

NEW PRODUCTS

MINIATURE-TUBE SOCKET

The E. F. Johnson Co., Waseca, Minn., is now producing a new socket for miniature tubes featuring government grade G steatite insulation. Listed

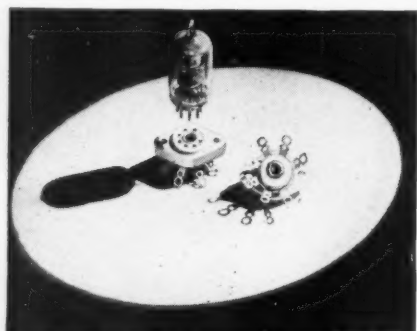


as No. 267 (Navy type designation CEJ-49401), it is designed for use with the 9000 series and Miniature series tubes including RCA 1S4, 1S5, 1T4, 1R5, etc.

Contacts are phosphor bronze, heavily silver plated, and are self-aligning so that they receive the tiny tube prongs without danger of fracturing the glass base of the tube. Other features include orientation of contacts for minimum capacity effect and a center shield for grounding to chassis. Steatite insulation is glazed top and sides and the bottom wax impregnated.

For additional information, write to the manufacturer for folder K and general products catalog 967K.

PAY-ROLL CALCULATOR

Pay rolls and job costs can be figured in a fraction of the usual time through the use of a new calculator, according to the manufacturers, the Berger - Bricker Company of 433

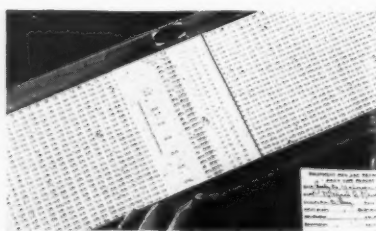

South Spring Street, Los Angeles, California.


Operating on a simple new prin-

ciple, this device includes all hourly rates of pay from \$0.50 to \$1.75 with a half-cent spread between rates. It covers all time periods up to 104 hours with divisions of one-tenth of an hour. It is handsomely made of lacquered wood and easily fits into a desk drawer.

DUST-TIGHT AIRCRAFT RELAY

A new dust-tight relay especially designed for aircraft applications requiring high current-carrying capacity without sacrifice of compactness and light weight has been announced by the General Electric Company.

The new relay is a solenoid-operated device with the normally-open contacts rated at 10 amperes direct current. These contacts will make or break 30 amperes at altitudes up to 40,000 feet. The coil, contacts, and plunger are enclosed in a dust-tight housing, and the unit is corrosion-proof, meeting 200-hour salt-spray

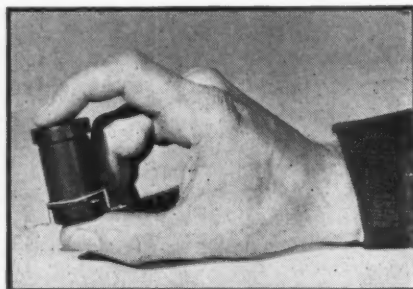

tests as stipulated by various government agencies.

The relay can be furnished in a single-pole, single-circuit form with normally-open contacts or in a single-pole, two-circuit form with one normally-open and one normally-closed contact. The operating coil can be furnished for either 12- or 24-volt d.c. operation. The relay can be mounted in any position on a metal or non-metallic base.

When the relay is in the energized or de-energized state, the contacts will remain in the open or closed position without chattering, even when subjected to mechanical frequencies of from 5 to 55 cycles per second at 1/32-inch amplitude (1/16-inch total travel) applied in any direction. The relay is designed for use in an ambient temperature range of from 95 C.

to minus 40 C., and will withstand 95 percent humidity at 75 C. on 48-hour tests and operate immediately thereafter.

EXPANDED RANGE OSCILLOGRAPH

Critical wartime requirements are responsible for a new cathode-ray oscillograph characterized essentially by a greatly extended frequency range, more versatility in the handling of applied signals, and special pickup means whereby input capacitance is reduced and stray pickup eliminated. Removable front cover protects panel, controls and tube screen, and also holds the shielded-cable test probe, when instrument is not in use.

Known as Type 224, this new oscillograph is now offered as a standard instrument by Allen B. Du Mont Laboratories, Inc., Passaic, N. J. One of its outstanding features is the Y-axis or vertical deflection response which is uniform from 20 to 2 million cycles. It has a comparably faithful square and sinusoidal wave response. The X-axis or horizontal deflection amplifier has a uniform characteristic from 10 cycles to 100 kilocycles. Both amplifiers have distortionless input attenuators and gain controls.



The widest variety of signal input connections are available. In addition to the conventional amplifier connections, signals can be applied directly

[Continued on page 39]




AS GIFTS OF PEACE GIVE WAY TO WAR

Relays BY GUARDIAN... SERVE ALL FRONTS!

★ Yuletide joys of '42 will not include the many electrical gifts which brought us cheer, and ease, and comfort in other years. Relays by Guardian have marched on from peacetime industry to the firing lines of war. Doing war jobs in many ways... in planes... in tanks... in communications... in bomb releases and gun controls. Wartime jobs which Guardian anticipated and planned long before "Pearl Harbor".

But, while thinking, building, and engineering the tools of war today, Guardian again is looking ahead to peacetime applications of Relays, Solenoids, Electrical Controls of all kinds. If you are making plans for "after-it's-over", ask our engineers to plan with you. Write to Guardian. Our wartime experience can help you build better products for the future.

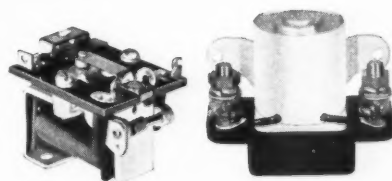

CONTROLS FOR ANY PURPOSE... ranging from 150 watts to 1000 amps... from tiny relays weighing less than an ounce... to big, rugged two-pound contactors.

GUARDIAN ELECTRIC

1605 WEST WALNUT STREET CHICAGO, ILLINOIS

A COMPLETE LINE OF RELAYS SERVING AMERICAN WAR INDUSTRY

RADIO

★ NOVEMBER, 1942



the resistors that knocked tradition into a cocked hat

BY DOING THE JOBS CONVENTIONAL WIRE-WOUND RESISTORS COULDN'T HANDLE

THE unique and exclusive construction of KOOLOHM resistors has completely revolutionized previous conceptions of wire-wound resistor design. It has freed engineers from use limitations which a few years ago they regarded as "necessary evils."

KOOLOHMS are the only resistors made with wire that is ceramic insulated *BEFORE* it is wound. This one feature alone provides you with advantages that no other wire-wound resistor can give you. It furnishes absolute protection against shorts and changed values. It makes possible extremely high resistance values in amazingly small-size units. It permits the use of larger, safer wire sizes. It permits full-rated wattage dissipation regardless of resistance value. This ceramic insulation on KOOLOHM wire is heat-proof to 1000° C. It is

moisture-proof and flexible and can either be layer wound or progressively wound in high density patterns. It allows perfect Ayrton-Perry windings, thus reducing inductance to negligible values, and also permits the design of units with predetermined inductance values. It makes possible the use of an *extra* outer protection in the form of chip-proof ceramic or shock-proof sealed glass casing. Thus *doubly* protected they can be easily and cheaply mounted directly to or against metal or grounded parts with *complete* resistor circuit insulation.


Thus, KOOLOHM superiority is not a matter of hair-splitting differences—it is *conspicuously* evident in any test you care to name.

Send for free samples and catalog—today!


SPRAGUE SPECIALTIES COMPANY (Resistor Division), North Adams, Mass.



Turns can't "swim" or short, when wound with KOOLOHM ceramic-insulated wire. Insulation has a dielectric strength of 350 volts per mil at 400° C.!



KOOLOHM construction permits perfect Ayrton-Perry windings. As a result, resistors are available having negligible inductance, even at 50 to 100 Mc.!



Section of KOOLOHM wire with ceramic insulation removed to show contrast between bare and insulated wire. This flexible, heat-proof insulation is actually applied to wire at a temperature of 1000° C.!




SPRAGUE

KOOLOHM

WIRE-WOUND RESISTORS



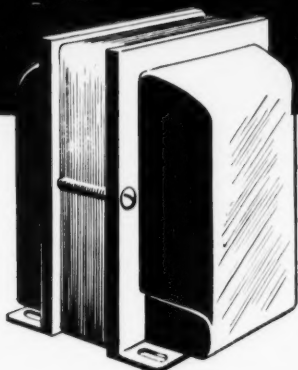

THERMADOR

A FAMOUS NAME IN ELECTRICAL PRODUCTS

A New Name in TRANSFORMERS

THERMADOR is well known in the field of electrical appliances—well known for engineering and quality built into numerous products serving the electrical industry all over America. Thermador now expands its services into the field of transformers.

Thermador combines the machinery, dies, equipment, inventory and many of the personnel of the well-known Los Angeles Inca Division of Phelps-Dodge Corporation with the facilities of their modern plant and now offers the industry transformers for radio, sound, public address, television and geophysical applications.



THERMATITE TREATED TO WITHSTAND HUMIDITY and EXTREME HEAT

Thermador transformers are Thermatite treated, which is a well tested and approved form of impregnation. This treatment, proved on thousands of transformers

under severe climatic conditions, gives these units the resistance to constantly withstand extreme conditions of humidity and heat. This is particularly important at this time with their widened use in foreign countries where extreme temperatures and humidity exist.



ON SCHEDULE DELIVERIES AFTER NOVEMBER 1, 1942

Thermador transformer division is in complete and efficient operation and in a position to bid on priority requirements.



EXPERIENCED ENGINEERS AT YOUR COMMAND

Consider Thermador Electrical Manufacturing Co. your source of assistance in engineering and production of transformers to meet your specific requirements.



THERMADOR TRANSFORMERS

**THERMADOR ELECTRICAL MANUFACTURING CO.
5119 S. Riverside Drive, Los Angeles, Calif.**

REPRESENTATIVES—Les Logan, 530 Gough St., San Francisco, California
Verner O. Jensen, 2607 Second Avenue, Seattle, Washington
M. J. Klicpera, P.O. Box 3113, Houston, Texas

"Seven Leagues Ahead"

When Space is at a Premium


TRIPLETT

*Thin
Line*

INSTRUMENTS




Full size of Instrument. Note deep shroud for glass protection—and "Quick-Look" Scale.

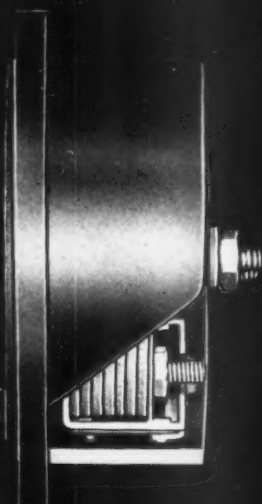

This molded case contains full size Triplet Mechanism. Rugged Construction—Compact Convenience.

THIS IS THE INSIDE STORY

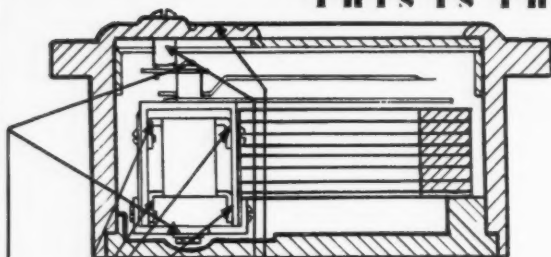


1 Four-point Core Support

2 Full Metal Bridges on Top and Bottom

3 Bezel Shroud Eliminates Unwanted Glare

4 One-piece Formed Spring Zero Adjustment

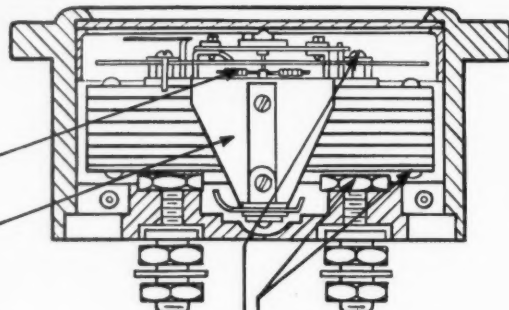

5 Balanced Frame Construction

6 Solid Balance Cross with Screw-type Balance Weights

7 Four-point Rigid Magnet Clamping

8 Separate Dial Mounting Independent of Top Bridge

Thin-Line Instruments also have Standard Large Coil Triplet Movements. Furnished with Osmium pivots for special requirements. All these features make for greater rigidity under vibration; greater permanence of calibration; greater user satisfaction.

TRIPLETT
Thin-Line

memo

FOR CIRCULATION TO...

Triplet Thin-Line Instruments meet rigid requirements for dependable performance. Though occupying minimum space they are *not* miniatures. Mechanisms are standard size with emphasis on excellent performance over long periods. Standardized installation. Made in three styles of cases — Molded, Metal Wide Rim and Metal Narrow Rim.

Triplet Thin-Line Instruments, available for many industrial applications, can be depended upon for precision performance in limited space. For full details write for "Triplet Thin-Line Bulletin".

THE TRIPLETT ELECTRICAL INSTRUMENT CO., BLUFFTON, OHIO, U. S. A.

PLEASE INSERT
INITIALS OF
YOUR EXECUTIVES

RADIO BIBLIOGRAPHY

F. X. RETTENMEYER

RCA Manufacturing Co., Inc.

7—REMOTE CONTROL, Part 1

IN PREVIOUS ISSUES:

Aviation Radio, May, 1942
Frequency Modulation, June, 1942
Crystallography, July, 1942
Tubes, August, 1942
Amplification, Detection, Sept. 1942
Filters, Sound, Loudspeakers, Oct. 1942

Radio Controlled Model Airplane—R. A. Isberg—*Radio News*, February, 1939, Vol. 21, page 10.

Radio Water-Stage Recorder—M. E. Kennedy—*Engineering News-Record*, Vol. 122, 1939, page 91.

Radio Controlled Model Navy—A. R. Boone—*Radio News*, Vol. 20, December, 1938, page 6.

Electric Timing Device Using Synchronous Clock Mechanism, Phototube, and Amplifier—R. W. Carlson—*Electronics*, Vol. 11, October, 1938, page 28.

Magnetic Tuning Devices—L. DeKramolin—*Wireless World*, Vol. 42, 1938, page 160.

Inductance variation by remote control; permeability of powdered-iron core varied by magnetizing current of larger control magnet.

More About Magnetic Tuning—L. DeKramolin—*Wireless World*, Vol. 43, 1938, page 5.

Latest News in the Radio-Controlled Aircraft Field—C. B. DeSoto—*QST*, Vol. 22, September, 1938, page 38.

Remote Control Powered Models—C. B. DeSoto—*QST*, October, 1938, page 42.

Ham Radio and Models—C. B. DeSoto—*QST*, September, 1938, page 38.

Variable-Inductance Tuning Applied to Automobile-Radio Remote Control—W. L. Dunn—*Proceedings IRE*, Vol. 26, 1938, page 800

Fernabstimmung durch Vormagnetisierung, *Radio-Mentor*, Vol. 7, 1938, page 175.

Fernabstimmung mittels Hochfrequenz über das Lichtnetz, *Radio-Mentor*, Vol. 7, 1938, page 416.

Fernschaltung von Rundfunkempfängern, *Illstr. Rundfunk*, Vol. 12, 1938, page 34.

Fernsteuerung elektrischer Geräte ohne

Rilfaleistungen, *Radio-Amateur*, Vol. 15, 1938, page 558.

The Wireless Pilot—J. M. Furnival—*Marconi Review*, March, 1938, page 3.

Tests with wireless direction finder linked to "P.B." automatic pilot of Puss Moth airplane; applications.

Robot Lands Airplanes without Aid from Pilots—Holloman—*Science News Letter*, Vol. 33, January, 1938, page 68.

New Gear for Radio-Control Systems—R. A. Hull—*QST*, Vol. 2, July, 1938, page 44.

A New System of Remote Control—C. N. Kimball—*RCA Review*, Vol. 2, 1938, page 303.

By carrier currents at low radio frequencies along mains wiring system; for various purposes, including remote control of broadcast receivers provided with "electric tuning."

Columbia Broadcasting Service Robot Timer—A. D. McCusker—*Radio News*, Vol. 19, June, 1938, page 47.

Sweck und Möglichkeiten der Fernbedienung—K. Nentwig—*Radio, Bildfunk, Fernchen f. Alle*, Vol. 17, Heft 6, page 101.

Fernbedienung des Rundfunkempfängers nach einem neuen Prinzip—R. Oechslein—*Bastelbriefe der Drahtlosen*, 1938, page 108.

Theory of the Discriminator Circuit for Automatic Frequency Control—H. Roder—*Proceedings IRE*, Vol. 26, 1938, page 590.

Der gegenwärtige Stand per Empfänger-Fernabstimmung—F. C. Saic—*Funk*, 1938, Heft 11, page 825.

Teledynamic Control by Selective Ionization with Application to Radio Receivers—S. W. Seeley, et al.—*Proceedings IRE*, Vol. 26, 1938, page 813.

Fort vom Genause? Washkann die Fernsteuerung bedeuten—F. Spreither—*Rundfunk-Grosshandler*, Vol. 7, 1938, Heft 9, page 408.

Remote Tuning of Communication Receivers—H. O. Storm—*Electronics*, Vol. 11, December, 1938, page 14.

Traffic Light in Your Car by Radio, *Radio Craft*, December, 1938, page 328.

This system uses three audio tones modulating u.h.f. signals transmitted by two transmitters simultaneously on the same frequency.

Radio Controlled Lightship and Light-

house—C. S. VanDresser—*Radio News*, Vol. 20, September, 1938, page 17.

Remote Control by Wired Wireless—W. H. Weeden—*Wireless World*, Vol. 42, 1938, page 138.

A Radio Control System for Model Aircraft—Weiss—*Aero Modeller*, Vol. 3, 1938, page 447.

Die Fernschaltung des Rundfunkempfängers—R. J. Wittwer—*Der Dt. Dandfunk*, Vol. 16, 1938, Heft 39, page 43.

Fernabstimmung über Abgeschirmte Kabel—H. Boucke—*Bastelbriefe der Drahtlosen*, 1937, Heft 1, page 21.

Remote tuning over a shielded cable.

Kapazitive und induktive Fernabstimmung über abgeschirmte Kabel—H. Bouche—*Funkschen*, 1937, No. 5, page 21.

Control of Galvanising Process—E. M. Bryson and A. M. Trogner—*Electrical World*, Vol. 107, January 30, 1937, page 42.

Bernbedienung durch Urdox-Lautstärkereger—W. W. Diefenbach—*Bastelbriefe der Drahtlosen*, 1937, Heft 12, page 378.

Remote control by means of Urdox automatic volume control circuit.

Empfänger-Fernschaltung über die Lautsprecherleitungen, *Funk*, 137, Heft 11, page 322.

Push-Button Station Selection—B. V. K. French—*Electronics*, Vol. 10, September, 1937, page 16.

Full Automatic Blind System, *Inter Avia.*, October, 1937, page 1.

Landing system developed by U. S. Army.

Fernabstimmung von Rundfunkgeräten—G. Heermann—*Funk*, 1937, Heft 21, page 615.

Radio Control of Model Aircraft—R. A. Hull and R. B. Bourne—*QST*, Vol. 21, October, 1937, page 9.

Radio Control of Model Aircraft—Hull and Bourne—*QST*, October, 1937, page 9.

Neue Englische Methode zur Fernabstimmung, *Radio-Mentor*, Vol. 6, 1937, page 358.

New R. C. 5 Radio Compass and the Radio Compass R. C. 5 Applied to the

RADIO BIBLIOGRAPHY


- Automatic Plant, *Aviation*, Vol. 36, November 1937, page 44; Rev. de l'Armes de l'Air, February, 1937, page 229.
- Remote Tuning Control—J. F. Ramsey—*Wireless World*, Vol. 41, page 231.
New Electrical System Using Coaxial Cables.
Operation of Apparatus by Remote Control Employing Multiplex Radio—Frequency Carrier Currents—H. W. Richards—N. Y., 1937, page 47.
- Midget Remote Amplifier—L. C. Simon—*Communications*, Vol. 17, September, 1937, page 24.
- Acorn Tube on Remote Job—W. E. Stewart—*Communication & Broadcast Engineering*, Vol. 4, February, 1937, page 9.
- Air Line Develops Robot Landing, *Automotive Industries*, Vol. 74, 1936, page 686.
- Application de la T. S. F. à la commande de machines de manoeuvre, *Revue Generale Chemins de Fer*, Vol. 55, 1936, page 258.
- Remote Control for Radio Receivers—J. C. Bain—*Bell Laboratories Record*, Vol. 15, October, 1936, page 49.
Detailed description of 27A Control Unit for Aircraft Receiver type 20.
- Remote Receiver Tuning at DKYL—K. M. Baldwin—*Electronics*, Vol. 9, August, 1936, page 19.
- Death-Dealing Radio Warfare of the Future—F. B. Saichild—*Radio News*, Vol. 17, 1936, page 391.
- Fernabstimmung von Empfängern, *Funk-Express*, 1936, No. 40, page 4; *Neuere Funkbote*, 1936, Heft 23, page 23; *Radio-Markt, Beil. z. Elektro-Markt*, 1936, No. 12, page 8.
- Fernbedienung von Radioapparaten, *Radio-Amateur*, Vol. 13, 1936, page 25.
- Die Fernbedienung des Empfängers—K. Nentwig—*Radio Markt, Beil. z. Elektro-Markt*, 1936, No. 14, page 7.
- Fernschaltung und Fernbedienung des Rundfunk-Empfängers—K. Nentwig—*Berlin-Tempelhof. Deutsch-literar. Inst. Schneider*, 1936, 39 p. 1.20m (Deutsche Radio-Bucherei, Vol. 74).
- Controlled Lighthouse Functions Entirely Without Keeper, *Electronics*, Vol. 9, May, 1936, page 50.
- Remote Control via 5 Meters—W. W. Walz—*Electronics*, Vol. 9, February, 1936, page 17.
- Wireless at the Helm, *Wireless World*, October 23, 1936, page 438.
Pilotless control of airplane.
- Remote-Control Amplifier—W. E. Wood—*Communication & Broadcast Engineering*, Vol. 3, December, 1936, page 22.
- Automatic Broadcasts of Flood Warn-ings, *Scientific American*, Vol. 153, 1935, page 36.
- Fernschalter!, *Radiowelt*, Vol. 12, Heft 13, 1935, page 13.
- Steam Gage Data by Automatic Radio—I. M. Ingerson—*Electrical World*, Vol. 105, November 9, 1935, page 31.
- Queen Bee, the British Robot Airplane, *Scientific American*, Vol. 133, 1935, page 204.
- New System for Remote Control of Radio Broadcast Receivers—J. B. Sherman—*Proceedings IRE*, Vol. 23, 1935, page 47.
- Stream-gaging Facilities by Automatic Radio Transmitters, *Engineering News Record*, Vol. 115, 1935, page 579.
- Eine Völlig neue Art der Fernsteuerung von Empfängern—H. Boucke—*Funkschu*, 1934, page 146.
An entirely new kind of remote control of short wave receivers.
- Remote Controlled Transmissions—J. A. Code—*Radio News*, Vol. 15, 1933, page 458.
- Fernschaltung und automatische Schaltung beim Rundfunkempfänger—Decibel *Qualitätsmarkt der Elektroskustischen Industrie*, Vol. 15, Heft 6D, 1934, page 134.
- Remote Control; Motorola Model 810, *Radio News*, Vol. 16, 1934, page 116.
- Fernschaltanlagen für den Selbstbau—M. Vordank—*Zeitschrift des Funkwesens*, 1934, page 449.
- La commande à distance des centres émetteurs radio-telegraphiques, *Société Independants de T.S.F.*, Publication No. 3, August, 1933, page 12.
Remote control of radio-telegraphic transmitters; illustrated description of some equipment made by Société Independante de t.s.f.
- Remote Control for any Single Dial Radio Receiver—E. Georges—*Radio News*, Vol. 14, 1933, page 590.
- Radio Aide to Air Navigation—C. F. Green and H. I. Becker—*Electrical Engineer*, Vol. 52, 1933, page 307.
New target-flight radio compass, and its combination with magnetic compass for automatic steering control with drift indication.
- Fernschalten von Radioempfängern—F. Moder—*Radio-Woche*, Vol. 10, No. 45, 1933, page 45.
- Fernbedienung von Empfängern—R. Ortner—*Radio-Woche*, Vol. 10, No. 18, 1933, page 99.
- Drahtlose Fernsteuerung, *Technik für Alle*, Vol. 24, Heft 4, 1933, page 150.
Simple remote control of ships by radio.
- Drahtlose Fernsteuerung—E. A. Pfeiffer—*Radio, Bildfunk, Fernschen f. Alle*, Vol. 12, 1933, page 512.
Remote control of vehicles.
- Ray Controlled Mechanism—R. Phillips—(Lond.) P. Marshall & Co., 1933, 96 p. 2s 6d.
- Special Flexible Shaft for Remote Control, *Electronics*, Vol. 6, 1933, page 174.
- Fernschaltung von Rundfunkempfängern—K. Steinner—*Deutscher Elektro-Anzeiger*, Vol. 29, Heft 6, 1933, page 15.
- Radio-Controlled Sailing Yacht—A. R. Boone—*Radio News*, Vol. 13, 1932, page 916.
- Fernsteuerung des Empfänger-Fernschaltung organen die Rundfunkanlage *Siemens Rundfunk-Nachr.*, Vol. 7, Heft 6, 1932, page 132.
- "Zähringer," das forngelente Zielschiff der Deutschen Reichsmarine—K. H. Neubauer—*Drahtlos-Nachrichten*, Vol. 6, Heft 1, page 6, 1932.
- Radio-Controlled Tractor Plowing, *Mfg. Record*, Vol. 101, January 28, 1932, page 18.
- Die Drahtlos Gesteuerte Zähringer—M. Rikli—*Dastelbriefe der Drahtlosen*, Heft 1, 1932, page 21.
- Fernregelung der Lautstärke bei Rundfunkempfängern—K. Steinner—*Deutscher Elektro-Anzeiger*, Vol. 28, Heft 24, 1932, page 18.
- Fernsteuersysteme in aller Welt—F. Str.—*Funkschau*, 1932, No. 2, page 12.
- Fernbeieunung von Empfängern—R. Vieweg—*Radio-Woche*, Vol. 9, No. 43, 1932, page 56.
Remote control of receivers.
- Drahtlose Fernsteuerung—R. Wollmann—*Bastelbriefe der Drahtlosen*, 1932, page 347.
- Radio-Fernsteuerungssystem—R. Wollmann—*Radiowelt*, Vol. 9, 1932, page 243.
Deals with the possibilities of remote control by radio.
- Compact New Device for Remote Control, *Dun's International Review*, Vol. 56, February, 1931, page 68.
- Les procedes Loth pour le Guidage des avions par ondes Hertzianes—C. Dantin—*Genie Civil*, Vol. 98, page 473, 1931.
- Remote Tuning Control Systems—A. Dinsale—*Wireless World*, Vol. 28, 1931, page 464.
- Remote Control Systems for Radio Transmitters—C. Felstead—*Radio Engineering*, Vol. 11, May, 1931, page 34.
- Review of Remote Control Development—G. Lewis and A. A. Ghirardi—*Radio Engineering*, Vol. 11, February 1931, page 29.
- Radio Method for Synchronizing Recording Apparatus—T. Parkinson and T. R. Gilliland—*Bureau of Standards, Jour. of Res.*, Vol. 6, 1931, page 195.
- RCA Remote Control Unit for Superheterodyne, *Dun's International Review*, Vol. 57, 1931, March, page 46.
- Mechanical Remote Tuning Controls

[Continued on page 32]

STANCOR

PROFESSIONAL SERIES

PLATE TRANSFORMERS

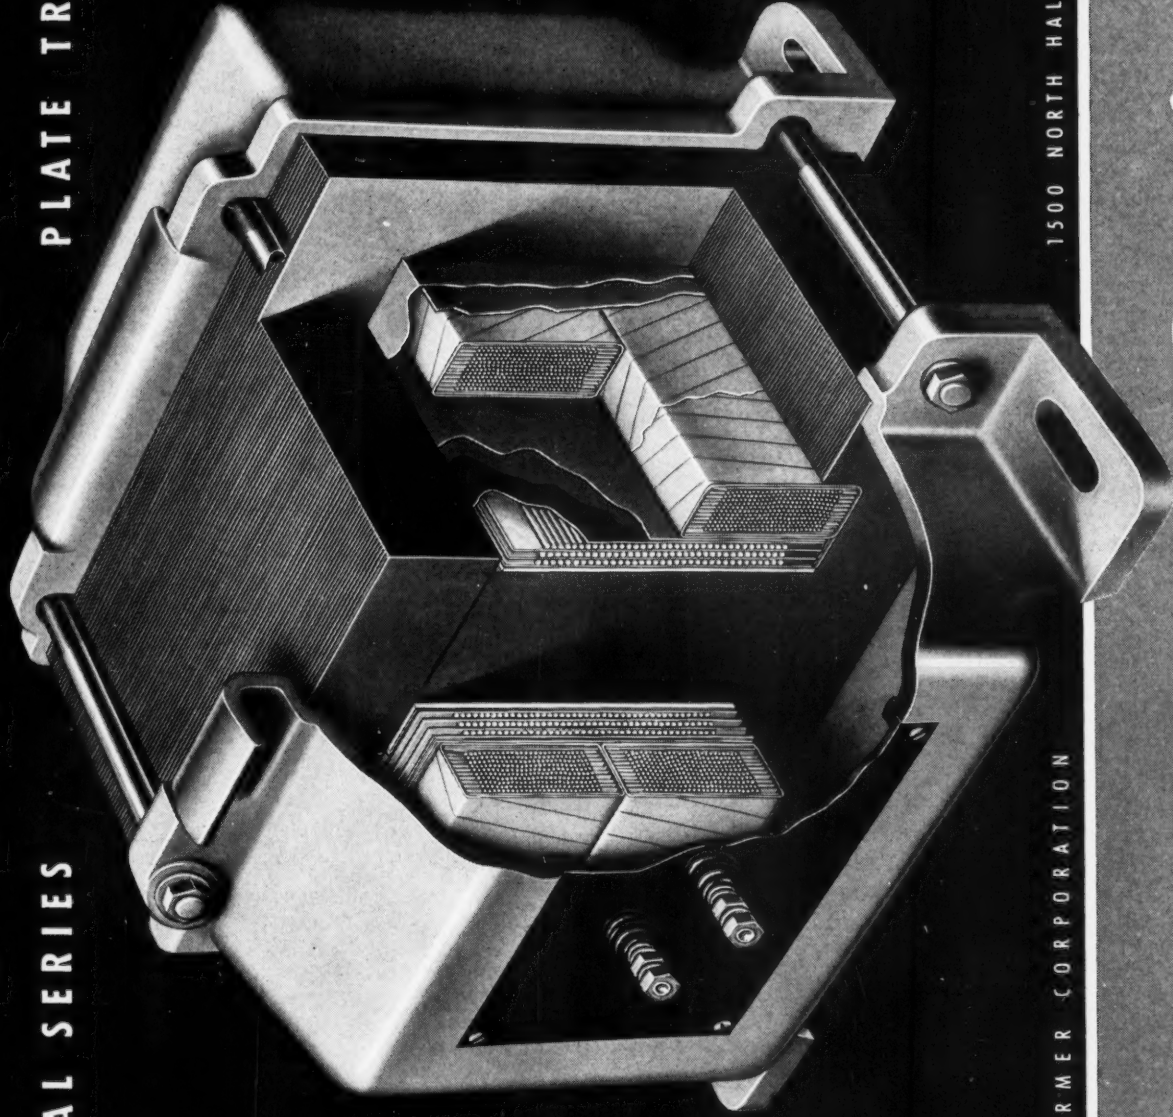

The best of insulating and conducting materials scientifically applied thruout the coil afford generous margins of safety against electrical failure.

Phenolic side panels with heavy duty insulators insure excellent dielectric characteristics and easy accessibility.

Cast semi-steel end bells provide a rugged mounting and a symmetrically finished appearance.


Accurately processed high grade silicon steel stampings, carefully laminated, result in an efficient and low loss core structure.

Vacuum impregnation of coils and thorough penetration of potting compounds furnish complete protection against the effects of humidity and time.

Rigid inspection of materials and progressive testing thruout fabrication result in a quality product.

STANDARD TRANSFORMER CORPORATION

1500 NORTH HALSTED STREET • CHICAGO



Built like a Battleship!

RADIO BIBLIOGRAPHY

for Radio Receivers—J. C. Smack—*Radio Engineering*, Vol. 11, January, 1931, page 28.

Method of solving problem of remote tuning control for broadcast and airplane radio receivers. Remote Control in Custom-Built Radio and Phonograph Installations—S. Stevens—*Radio News*, Vol. 13, 1931, page 268.

Fernsteuerung von Empfangsgeräten—F. Steyer—*Mirage*, 1931, No. 29, page 7.

Fernsteuerung-ein Arbeitszeit für den Handler—E. Wrona—*Elektro-Markt, Beibl. Radio-Markt*, 1931, No. 41, page 43.

Remote control; a relay system is recommended. El Barco-blanco de la marina Alemana y el sistema de su gobierno a distancia, *Revista General de Marina*, Vol. 53, 1930, page 959.

Target ship of German Navy and system for remote control; notes on Zahring and radio control from torpedo boat.

Remote Control Tuning Unit for the Modern Radio Receiver—N. Bishop—*Radio Engineering*, Vol. 10, August, 1930, page 30.

Balanced-bridge method of tuning from distance.

Emploi des commandes électriques à distance—A. Gagne—*Industrie des Voies Ferrees et des Transports Automobiles*, Vol. 24, 1930, page 222.

Controlling Army Pursuit Planes by Radio—C. Howard—*Radio News*, Vol. 12, 1930, page 424.

Das Fernlankschiff "Zehringen" und die Funktechnik—O. Zemke—*Funkpost*, Vol. 2, No. 4, 1930, page 46.

Pilotless Planes—A. M. Low—*Airways*, Vol. 6, 1930, page 315.

Entwicklung des Ferncompasses und Seine bedeutung für die automatische Steuerung—Moeller—*Zeitschrift für Flugtechn. und Motorl.*, 1930, page 640.

Die Drahtlose Schreibmaschine—H. Rosen—*Funkschau in Europa-Funk* 1930, page 204.

Eine Drahtlos ferngesteuerte Schreibmaschine—H. Rosen—*Funk-Wacht*, Vol. 5, Heft 38, 1930, page 38.

Wir bauen ein Fernlenkboot—R. Scherm—*Funk Magazine*, Vol. 3, 1930, page 826.

Das Geheimnis um des drahtlos gelenkte Zeilschiff Zahringen—W. Schrage—*Funkschau im Europa-Funk*, No. 44, 1930, page 348.

What Price Remote Control?—M. B. Sleeper—*Radio News*, Vol. 12, 1930, page 32.

Take Your Choice of Remote Control, *Radio News*, Vol. 12, 1930, page 589. Practical Remote Control Systems—S. G. Taylor—*Radio News*, Vol. 12, July, 1930, page 42.

Distant Control of Wireless Broadcast

Receiver—B. S. T. Wallace—*Telegraph and Telephone Journal*, Vol. 16, February, 1930, page 84.

Eine Fernbedienungsanlage—E. Nirona—*Radio-Umschau, Beil. z. Südwestdgt. Rundfunk-Ztg.*, Vol. 6, No. 38, 1930, page 11.

Remote Control by Radio—G. F. Lampkin—*Radio*, Vol. 11, April, 1929, p. 13.

A Remote Control Without Wires, *Radio News*, February, 1928, page 892.

Fernlenkversuche der Reichsmarine in den Jahren 1916-1918—H. W. Birnbaum—*Zeitschrift für Hochfrequenztechnik*, Vol. 32, 1928, page 162.

Radio control experiments by the German Navy in 1916-1918.

Clark's Radio Moisture Control Patent—J. D'A. Clark—*Paper Trade Journal*, Vol. 86, February 23, 1928, page 140.

La commande a distance des embarcations par T. S. F.—*Genie Civil*, Vol. 92, 1928, page 113.

Simple Remote Control Device—W. F. Crosby—*Radio News*, Vol. 10, 1928, page 48.

Process and Device for Determining the Moisture Content of Paper on the Paper Machine, *Paper Trade Journal*, Vol. 86, February 23, 1928, page 136.

Radio Control of Moisture in Paper Drying—W. D. Sommerville—*Paper Trade Journal*, Vol. 86, February 23, 1928, page 131.

Street Lights of Entire City Controlled by Vacuum Tube Transmitter, *Public Service Management*, Vol. 44, January, 1928, page 20.

Uhren-Ferneinstellung durch drahtlose Zeitzeichen—I. Willigut—*Elektrotechnische Zeitschrift*, Vol. 49, 1928, page 614.

La remise a l'heure automatique des pendules par la telegraphie sans fil—G. Maltorn—*Genie Civil*, Vol. 91, 1927, page 564.

When Radio Turns Street Lamplighter—S. R. Winters—*Radio News*, Vol. 9, 1928, page 1120.

Radio-Frequency Equipment Used for Remote Control, *Electrical West*, Vol. 59, 1927, page 334.

Trolley Car Operated by Radio, *Electric Railway Journal*, Vol. 70, page 1102.

Remote Control of Broadcast Receivers—P. B. K. Hole—*Electrical Review* (London), Vol. 99, 1926, page 339.

McCook Field Radio Car—A. M. Jacobs—*Radio News*, Vol. 7, 1926, page 971.

Controlling Power and Motion by Radio—A. P. Taing—*Radio News*, Vol. 7, 1926, page 1280.

New Method of Directional Control—

P. I. Tyers—*Electrician*, Vol. 96, 1926, page 31.

La commande à distance par ondes Hertiennes, l'emploi de relai à arc de mercure—H. Bouillet—*Genie Civil*, Vol. 86, 1925, page 581.

Distance control by means of Hertzian waves; discusses use of mercury-arc relays in radio-telegraphy, selective device, power and type of sender, amplifiers and relays; distance control of ships and airplanes.

La commande a distance de relai par T. S. F. au moyen de lampes triodes, *Genie Civil*, Vol. 87, 1925, page 135.

Drahtlose regelung eines Umformerwerkes, *Elektrotechnische Zeitschrift*, Vol. 46, 1925, page 1275.

Wireless control of a transformer plant.

Radio - controlled Automobile—H. Green—*Radio News*, Vol. 7, 1925, page 592.

Radio-controlled Automobile—P. B. Hance, Jr.—*Radio News*, Vol. 7, 1925, page 774.

Signal Turns Set On and Off, *Wireless World*, June 10, 1925, page 564.

The Compare Radio Typewriter—Dr. O. Pohl—*Radio News*, June, 1925, page 2254.

Uses eight tones—sends two tones in proper order for each letter.

First Radio-controlled Substation, *Electrical World*, Vol. 84, 1924, page 479.

L'avion automatique et la direction des avions par T.S.F.—P. Hemardinger—*La Nature*, January 19, 1924, page 39.

Will Radio Make Our Railroads Safe?—H. S. Pyle—*Radio News*, Vol. 6, 1924, page 903.

Army's Man-less Airplane, *Aerial Age*, Vol. 16, 1923, page 73.

Mystery Radio Stops Line of Autos, *Popular Mechanics*, Vol. 40, August, 1923, page 195.

Navy Again to Experiment with Radio Control, *Wireless Age*, Vol. 10, February, 1923, page 54.

Relay Recorder for Remote Control by Radio—F. S. Dumore—*American Institute of Electrical Engineers*, Trans., Vol. 41, 1922, page 242, disc. p. 245; condensed in *Electrical World*, Vol. 80, page 122.

Radio Ship Control—R. S. Griffin—*Mechanical Engineering*, Vol. 44, 1922, page 43.

Details of the mechanical changes made in the U.S.S. Iowa by means of which it is operated and maneuvered from a distant control ship.

Wireless Telemechanics—Geuritot—*Onde Electrique*, Vol. 1, 1922, page 141.

Air Service Develops Radio Controlled Automobile, *Aviation*, Vol. 11, 1921, page 690.

Distant Control of Boats and Aircraft—L. Chauveau—*Radio-electricite*, Vol. 2, 1921, page 104; abstract in *Electrical World*, Vol. 71, 1921, page 1085.

[Continued on page 34]

Constant Voltage



15 KVA for a BATTLESHIP ...or 15 VA for a VACUUM TUBE

You name the assignment... Sola engineers will design the transformer that will stabilize your power supply at peak efficiency 24 hours per day.

Even under normal conditions supply line voltages are rarely constant. And now, with power lines taxed beyond capacity by the unprecedented demands of war production, fluctuating voltages are a constant threat to the safety of sensitive, precision instruments... a constant handicap to the efficiency of production lines.

There are no assignments too vital... none too small for Sola Constant Voltage

Transformers. They deliver constant, stable voltage on 24 hour shifts even though line voltages vary as much as thirty percent.

Sola Constant Voltage Transformers are fully automatic and instantaneous in operation and self-protecting against short circuit. There are no moving parts.

Compact, standard designs are available in capacities ranging from 15VA to 10 KVA, or special units for special applications can be built to your exact specifications.

Ask for Bulletin 11CV-74
SOLA ELECTRIC COMPANY
2525 Clybourn Ave., Chicago, Illinois



CONSTANT VOLTAGE TRANSFORMERS

SOLA

RADIO BIBLIOGRAPHY

New Wireless Control Also Lands Planes, *Aerial Age*, Vol. 14, 1921, page 341.

Les problèmes du vol des avions sans pilotes, *Genie Civil*, Vol. 79, 1922, page 496.

Radio controlled Aeroplanes, *Aerial Age*, Vol. 12, 1921, page 663.

Radio Controlled Auto at McCook Field, *Aerial Age*, Vol. 13, 1921, page 547.

Radio Controlled Automobile, *Scientific American*, Vol. 125, 1921, page 253.

Remote Control by Radio—A. L. Wilson—*Electrical Journal*, Vol. 18, 1921, page 146.

Crewless Battleship Operated by Radio—S. R. Winters—*Popular Mechanics*, Vol. 36, August, 1921, page 166.

Wireless Bound—an Interesting Case of Radio Control—G. Gaulois—*Scientific American*, Vol. 122, 1920, page 601.

Torpedo Controlled by Airplane by Means of Wireless—E. T. Jones—*Wireless Age*, Vol. 8, October, 1920, page 30.

Radio Control of Naval Units, *Scientific American*, Vol. 123, 1920, page 442.

Naval Radio Remote Control—P. H. Boucheron—*Scientific American*, Vol. 121, 1919, page 234.

Wirelessly-directed Aircraft, *Engineer*, Vol. 127, 1919, page 357.

Electrically-controlled Torpedo Boat, *Electrical World*, Vol. 70, 1917, page 1135.

Editorial commenting on German radio-controlled torpedo boat.

German Raiders Which Put Out to Sea Without Crews, *Scientific American*, Vol. 117, 1917, page 377.

Die Prioritate des Vrfahrens zur Fernsteuerung von Rahrzeugen durch Elektrische Wallene—A. Vogler—*Elektrotechnische Zeitschrift*, Vol. 38, 1917, page 440.

Letter discussing priority of the invention of remote control of ships by electrical waves.

Starting an Automobile by Wireless Waves, *Scientific American*, Vol. 113, 1915, page 323.

Wireless-controlled Beacons: A New Use of Hertzian Waves—L. Bannerman-Phillips — *Scientific American*, Vol. 11, 1914, page 425.

Wireless Control of Torpedo Boats and Other Vessels, *Electrical Review & Western Electrician*, Vol. 65, 1914, page 343.

Wireless Train Control—F. C. Coleman—*Scientific American*, Vol. 109, 1913, page 428.

Neuere Einrichtungen zur Kraftübertragung in die Ferne ohne Forthau fenden Leitungdraht—W. Wolff—

Schiffbau, Vol. 14, 1913, page 999.

Describes experiments on control of torpedo boats, explosion of submarine mines, etc., by wireless.

Fernsteuerung von Unterseebooten in England, *Elektro-Technische Zeitschrift*, Vol. 33, 1912, page 218.

Brief note on radio control of submarines in England.

Wirelessly Directed Torpedo—B. F. Missner—*Scientific American*, Vol. 107, 1912, page 53.

Wireless-controlled Boat, *Scientific American* (Supplement), Vol. 72, 1911, page 261.

Wireless Telegraph Notes, *Electrician*, Vol. 68, 1911, page 77.

Brief note on tests of radio-control of torpedoes.

New Method of Telecontrol—C. L. Durand—*Electrical Review & Western Electrician*, Vol. 56, 1910, page 74.

Description of remote control system for motor-boats, torpedoes, etc.

Wireless Control of Airships, *Electrician*, Vol. 65, 1910, page 131.

Brief description of radio-controlled model dirigible.

Balloon Control by Wireless, *Electrical World*, Vol. 54, 1909, page 137.

Brief announcement of test on radio control of dirigible, invented by M. C. Anthony.

Lights Controlled by Wireless, *Electrical Review & Western Electrician*, Vol. 54, 1909, page 933.

Appareil telemecanique Systems du B. d'Ivry, *Le Technique Moderne*, Vol. 1, 1909, page 476; abstract in *Elektrotechnische Zeitschrift*, Vol. 30, 1909, page 1221.

Wireless Control of Torpedoes, *Electrician*, Vol. 63, 1909, page 737.

Brief note on remote control of torpedoes, invented by Gustave Gavet.

Work Begun on Dirigible Wireless Airship, *Electrical Review and Western Electrician*, Vol. 54, 1908, page 619.

Dr. Branley's "Telemechanic" Apparatus and Protecting Device—L. Du Bois—*Electrician*, Vol. 60, 1908, page 789.

Knudsen Wireless Typewriter, *Scientific American*, Vol. 99, 1908, page 296.

Wireless: Information Concerning Dr. F. H. Milliner's Apparatus for Remote Control of Machinery, *Railway & Locomotive Engineering*, 1908, Vol. 21, page 233.

Telemechanic Device—Branly—*Electrical Review*, N. Y., Vol. 51, 1907, page 1022.

Controlling Torpedoes by Wireless Telegraphy, *Scientific American*, Vol. 96, 1907, page 250; *American Society of Naval Engineers*, Vol. 19, 1907, page 513.

Dr. Branly's Apparatus for Control of Distant Mechanical Effects, *Scientific American*, Vol. 97, 1907, page 479.

Branly "Telemechanic System"—C. L. Durand—*Electrical Review*, N. Y., Vol. 51, 1907, page 127.

Nouvel Appareil Telemechanique sans fil—G. Gabet—*Comptes Rendus*, Vol. 144, 1907, page 74.

Fernbeweger—Nesper—*Verkehrstechnische Woche*, Vol. 2, 1907, page 240.

Commande electrique a distance per les ondes Hertziennes application a la commande d'un sous-marin torpilleur—Devaux—*Societe Francaise des Electriciens*, Bull. Series 2, Vol. 6, 1906, page 309; same in *L'Electrician*, Vol. 32, 1906, page 49; German abstract in *Elektrotechnische Zeitschrift*, Vol. 20, 1907, page 350.

Remote control of a torpedo boat by radio.

Drahtlose Telegraphie im Eisenbahn-Sicherungsdienst—Nesper—*Elektrotechnische Zeitschrift*, Vol. 27, 1906, page 906; *Electrician*, Vol. 58, 1906, page 297; *Electrical Magazine*, Vol. 6, 1906, page 406.

Distribution et controle d'actions produites a distance par les ondes electriques—E. Branly—*Comptes Rendus*, Vol. 140, 1905, page 777.

Production a distance des effets mechaniques du courant electrique sans fil de ligne—C. D. Kubitski—*Review Technique*, Vol. 26, 1905, page 753.

Transmission of Electric Energy Without Wires—N. Tesla—*Electrical World & Engineer*, Vol. 43, 1904, page 429.

Elektrische Fernsteuerung von Schiffen und Torpedoes, *Elektrotechnische Rundschau*, Vol. 21, 1903, page 51.

Das Telekin, *Erfindungen und Erfahrungen*, Vol. 30, 1903, page 548.

Steering Torpedoes by Wireless Telegraphy, *Scientific American*, Vol. 84, 1901, page 101.

Steering Torpedoes by Means of Wireless Telegraphy—F. A. A. Talbot—*Scientific American*, Vol. 82, 1900, page 291.

Torpedo Steering by Ether Waves, *Electrician*, Vol. 43, 1899, page 112.

Tesla's Latest Invention, *Electrical Review*, Vol. 33, 1898, page 298.

Describes invention for controlling operations of a mechanism without any tangible connection and from a great distance.

Transmission of Power Through the Air Without Wires—J. Towbridge—*Scientific American*, Vol. 79, 1898, page 330.

Report of experiments on Tesla patent.

Hydraulically-operated Remote Controls—A. Wasbauer—*Machinery*, December, 1938.

Ammeter Measures D. C. 2 Miles Away—F. S. Stickney—*Electrical World*, Vol. 110, September 24, 1938, page 884. [Continued on page 36]

ARMY

E

NAVY

Medal of Honor
won in the battle
of production

★
Eimac
TUBES

EITEL-McCULLOUGH, INC.

San Bruno, California, U. S. A.

Export Agents:

FRAZAR & CO., LTD., 301 Clay St., San Francisco, Calif., U. S. A.

RADIO BIBLIOGRAPHY

- Remote Tuning of Communication Receivers—H. C. Storm—*Electronics*, December, 1938, page 14.
- Remote Indication of Direct Currents—F. S. Stickney—*Electric Journal*, Vol. 35, September, 1938, page 365.
- Pneumatic Telemetering—C. B. More—*Engineering*, Vol. 60, April, 1938, page 332.
- Direction Indication for Rotary Antennas—L. C. Waller—*Radio*, October, 1938, page 14.
- Telemetering: Five Basic Systems—P. MacGahan—*Electrical Journal*, March, 1938, Vol. 35, page 113.
- Carrier Current Telemeter, *Electrotechnical Journal*, (Jap.) Vol. 2, No. 2, February, 1938, page 32.
- Continuous-Control Systems with Variable Characteristics—H. M. Schmitt—*Indust. and Eng. Chem.*, Vol. 29, 1937, page 1229.
- Limitation of Transmission Distance for Measurements by Ordinary Instruments—P. M. Pfler—*A. T. M.*, No. 72, June, 1937, page 71.
- Evershed-Midworth Telemeter System, *Engineer*, Vol. 163, January 8, 1937, page 44; *Electrician*, Vol. 118, January 15, 1937, page 68.
- Siemens Remote Control—P. Satche—*R. G. E.*, Vol. 40, 1936, page 595; *S. A. B.*, 1937, page 199.
- Apparatus for Measurement at a Distance—A. Iliovici—*A. T. M.*, No. 76, October, 1937, page 136.
- Frequency Impulse System and Variable Frequency System—O. Iliovici—*S. A. B.*, 1937, page 3113.
- Timed Impulse System of Transmitting Measurements—L. Brandenburger—*A. T. M.*, No. 68, February, 1937, page 19.
- Automatic Frequency Control Circuit (G. E.), *Service*, November, 1936, page 548.
- A Converter for Remote Tuning of T. R. F. Set with Heterodyne Oscillator, *Radio World*, December 20, 1930, page 8.
- Electron Tube Telemetering System, *Journal AIEE*, Toronto, Ontario, Canada, June, 1930.
- Continuous Tuning by Push Buttons: New Invention Automatically Tunes Receiver, New York *Herald Tribune*, September, 1928.
- Water Level Indications Transmitted Long Distances, *Power*, June 5, 1928.
- Electrical Developments of 1938—G. Bartlett—*General Electric Review*, Vol. 42, 1939, page 15.
- Carrier current control discussed.
- Impulse generators for Telemetering Purposes—L. Brandenburger—*Siemens Zeitschrift*, Vol. 19, 1939, page 42.
- Regulation for Type-K Carrier—F. A. Brooks—*Bell Lab. Record*, Vol. XVII, 1939, page 160.
- Application of Capacitance Potential Devices—J. E. Clem—*American Institute of Electrical Engineers*, Trans, 1939, page 1.
- Remotely Controlled Receiver for Radio Telephone Systems—H. B. Fischer—*Proceedings IRE*, April, 1939, page 264.
- Remote Switchgear Control by Means of Selector Relays—W. Henning—*Siemens Zeitschrift*, Vol. 19, 1939, page 38.
- Pneumatic Control of Doors on Rail and Road Vehicles—E. Hugentobler—*Brown Boveri Review*, Vol. 25, 1939, page 237.
- Il progetto di Installazione di Telecommando—E. Immirzi—*Elettrotecnica*, Vol. 26, 1939, page 6.
- Why Telemetering—G. S. Lunge—*General Electric Review*, Vol. 42, page 150.
- Remote Control Systems with Frequency Changing Valve and Associated Components in Control Unit—E. Martin—*Wireless World*, March 16, 1939, page 249.
- New American "Quality" Receiver—L. G. Pacent and H. C. Likel—*Wireless World*, Vol. 44, 1939, page 271.
- Remote Tuning and Volume Control, *Wireless World*, October 7, 1925, page 463.
- Experimental Wireless and Wireless Engineer*, October, 1924,
Shows variable condenser actuated at a distance by thread; uses telescope to read dial.
- The Wireless Age Push Button Receiver, *Wireless Age*, January, 1924, page 48.
- Remote Control Antenna Switch, *Radio News*, May, 1921, page 779.
- Uni-Control Motor Drive—Thompson—*Everyday Engineering*, August, 1920, page 450.
- Electrical Experiments*, March, 1918, page 765.
Claims to be earliest on automatic tuning.
- Automatic Antenna Magnetic Switch, *Wireless Age*, March, 1915, page 620.
- Individual Motors and Keys Can Control Tuning from Bridge of Ship Remotely—W. Goodchild—*Wireless Age*, November, 1915.
- Phase-angle Control of System Interconnections—R. E. Pierce and B. W. Hamilton—*Journal AIEE*, Vol. 58, 1939, page 83.
- Remote Control, *Wireless World*, March 23, 1939.
Using D.C. over power wires.
- Remote Control at Devon, W. Va., on Norfolk & Western, *Railway Signaling*, Vol. 32, 1939, page 36.
- Remote Control on Union Pacific, *Railway Signaling*, Vol. 32, 1931, page 77.
- Rotary Element for Antenna*. Bassett Hand Book. Chamberlin Bassett Research Corp., 211 Service Court, South Bend, Ind.
- Remotely Controlled and Automatic Rectifier Plant—E. Schroder—*Siemens Zeitschrift*, Vol. 19, 1939, page 78.
- Photoelectric Control of Street Lighting Pays Dividends—D. N. Tiffany—*Electric Light & Power*, Vol. 17, Feb. 1939, page 48.
- Remote Measurement by Amplitude Modulation Method—T. Tomituka—*Electrotechnical Journal* (Jap.), Vol. 3, 1939, page 79.
- AC-DC Operation of Sync. Motor: An Oscillator for Operating Sync. Motor on DC, *Service*, June, 1938, page 22.
- New Cold Cathode Gas Triode—W. E. Bahls and C. H. Thomas—*Electronics*, Vol. 11, May, 1938, page 14.
Describes OA4-G tube for ever-ready remote control.
- Centralized Control of Public Lighting and Off-peak Loads by Superimposed Ripples—H. P. Barker—*Journal AIEE*, Vol. 83, 1938, page 823; *Electrician*, Vol. 121, 1938, page 566; *Electrical News*, Vol. 47, June, 1938, page 17.
- Load Totalization—E. J. Boland—*General Electric Review*, Vol. 41, June, 1938, page 282.
- Automatic Remote Amplifier—C. H. Brewer—*Electronics*, Vol. 11, November, 1938, page 21.
- Remote Control of Network Protectors—W. H. Brownless and W. E. Dent, Jr.—*Journal AIEE*, Vol. 57, 1938, page 685.
- Control Systems for Domestic Loads—W. B. Buchanan—*Hydro-Electric Power Commission of Ontario*, Bull., Vol. 25, 1938, page 62.
- Change-over of an Existing Public Lighting System to Single Control by Photoelectric Cell and with Switches in Cascade—D. Burgher—*Association Suisse des Electriciens*, Bull., Vol. 29, 1938, page 456.
- Practical Remote Amplifiers—R. W. Carlson—*Electronics*, Vol. 11, August, 1938, page 25; *Radio News*, Vol. 20, September, 1938, page 47.
- Carrier-Current Protection, *Electrician*, Vol. 121, 1938, page 17.
- Central Control of Street Lighting, *Electrical Times*, Vol. 93, 1938, page 191.
- Centralized Control of Public Lighting and Off-Peak Loads, *Engineer*, Vol. 166, 1938, page 388; *Electrician*, Vol. 121, 1938, page 419; *Electrical Review* (London), Vol. 123, 1938, page 515.



*"Still Doing Business
at the Same Old Stands"*

SERVICEMEN

... your Distributor can
STILL Supply you with

Centralab

MIDGET RADIOHM REPLACEMENTS

Fortunately . . . your distributor
can still supply you with Midget
Radiohms for replacements.

The smooth wall-type resistor for
which Centralab Radiohms are
famous will keep that now-precious
radio in good working condition.

Stick to OLD MAN CENTRALAB
for Replacements . . . and always
specify "CENTRALAB".

RADIOHMS • FIXED RESISTORS
• FIXED AND VARIABLE
CERAMIC CAPACITORS
• SELECTOR SWITCHES

CENTRALAB: Div. of Globe-Union Inc., Milwaukee, Wis.

YOU'RE WAY AHEAD OF THE ACTION IN THE U.S. ARMY SIGNAL CORPS



• Some day American voices will rock the Imperial Palace in Tokyo and cause the defenses of Berlin to tremble. They will be the voices of U. S. Army radio men, relaying commands for the final attack. Will yours be one of them?



IN THIS fast-moving war, words are weapons. Split-second communications are vital to the timing and teamwork that win battles. As one of Uncle Sam's radio soldiers, you not only see action—you help to guide and direct it!

In Army communications, your opportunities for heroic service are limitless. At the same time, you receive training and experience that will be invaluable for a successful after-the-war career. You learn how to assemble, install and operate the most modern radio transmitters, receivers, "Walkie-Talkies," "Electronic Sentries" and scores of other closely guarded secret devices—pioneers of future industries—which combine today to knit the whole Army into one hard-fighting unit.

Any man, physically fit, from 18 to 44, inclusive, may enlist. Licensed radio operators and radio, telegraph and telephone workers may enlist for active duty at once. They may advance rapidly up to \$138 a month, plus board, shelter and uniforms, as they earn higher technical ratings.

Men of 18 and 19 may choose enlistment in the Signal Corps without any previous training or experience.

Those without qualifying experience, who enroll full time, may enter the Signal Corps Enlisted Reserve for training with pay. Graduate Electrical Engineers may apply for immediate commissions in the Signal Corps.

Civilians over 16 years of age may attend a Signal Corps School, and will be paid not less than \$1020 per year for full-time training and future service with the Signal Corps. Apply U. S. Employment Bureau or U. S. Civil Service.

"KEEP 'EM FLYING!"



U.S. ARMY RECRUITING AND INDUCTION SERVICE

Visit or write the nearest U. S. Army Recruiting and Induction Station or write to: "The Commanding General," of the Service Command nearest you, or Procurement Branch, AG-2, A.G.O., Washington, D. C.

NEW PRODUCTS

[Continued from page 24]


to the deflection plates of the 3-inch cathode-ray tube, when it is desirable, by means of terminals at the front panel of the unit. The Y-amplifier has an input connection for the Shielded-Cable Test Probe Type 242A, supplied with the instrument. This reduces input capacitance and eliminates stray pickup. All high-voltage electrolytic condensers are eliminated from circuit.

Type 224 Oscillograph weighs 49 lbs., and measures $14\frac{1}{8}$ " high, $8\frac{3}{8}$ " wide, $15\frac{1}{8}$ " deep. Operates on 115 volts, 60 cycles a.c.

★

FLEXIBLE HEATING ELEMENT

Available in any length, by the inch, foot or yard, a low-power flexible heating element now finds many uses particularly in very limited space. Known as the Glasohm, and also widely used as a flexible power resistor, this product is made by Clarastat Mfg. Co., Inc., 285-7 N. 6th St., Brooklyn, N. Y.

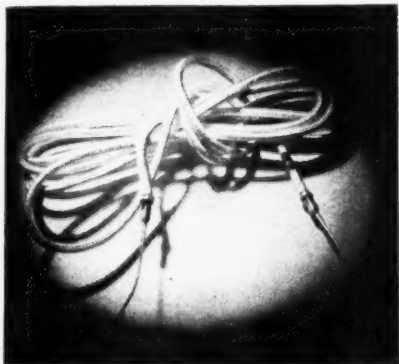

In the Glasohm construction the resistance wire is wound on a fibre-glass core and is protected by a fibre-glass braided covering. The fibre-glass, while providing the desirable properties of unbreakable and virtually indestructible glass, is almost as flexible as silk, so that the unit can be readily bent and compacted to fit snugly about parts to be heated, or again jammed into very tight spots, in either case providing an efficient heating means. Typical Glasohm heating elements range from a few inches to several feet in length. They can be made to any required length and provided with any type terminals. Wattage ratings are from 1 to 4 watts per body inch depending on the application. Operating temperatures up to 750° F.

★

NEW POWER PACKAGE FOR AIRCRAFT SUBASSEMBLIES

A new driving mechanism—the power package—has been announced



A Lot of Jack for the Job on Hand!




Utah Long Jack

● The success of many an operation may depend upon a jack. With Utah Jacks you can be sure of dependable performance. Utah-Carter Short Jacks, for instance, are small and compact, but do a full size job. Utah-Carter Long Jacks take minimum panel mounting space.

Short and long jacks fit all plugs in two and three conductor types. All contacts between springs are

fine silver, giving minimum contact resistance.

Utah-Carter Imp Short Jacks are popular because they combine compact size, highest quality and economical price. Unique patented design makes them the smallest jack fitting standard plugs. Write today for full information — there is a Utah Jack to meet your requirements.



Utah Open Circuit Jack

UTAH VITREOUS ENAMELED RESISTORS—From 5 to 200 watts, they are available either as fixed—tapped or adjustable. Also non-inductive types.

UTAH JACK SWITCHES—Long and Short Frame and Imp Type Switches to meet the circuit and space requirements you need.

UTAH PHONE PLUGS—Two or three conductor types—for practically every type of application.

UTAH TRANSFORMERS are fully guaranteed. Able to meet the requirements in choke, input, output and smaller capacity power transformers.

WRITE FOR FULL DETAILS

UTAH RADIO PRODUCTS COMPANY

General Offices and Factory
846 ORLEANS STREET • CHICAGO, ILLINOIS

RADIO

★ NOVEMBER, 1942

39



In the radio field it's

RADIO

The editorial contents are devoted strictly to radio design, engineering, production and operation. The "Bibliographies", "Design Worksheets", and data on the theory and application of radio devices **published exclusively in RADIO**, are helpful to every engineer and technician engaged in all phases of civilian and military radio work. **Subscribe today!**

15 Big Issues-\$3.00

regular price is
\$3.00 for 12 issues

27 Big Issues-\$5.00

regular price is
\$5.00 for 24 issues

Special: Subscription price to men
in the armed service \$1.50 per year

TEAR OUT AND MAIL

Use the Coupon Below

TEAR OUT AND MAIL

It must be filled-in completely.

"RADIO"

Radio Magazines, Inc.
132 W. 43rd St., New York City

SPECIAL MONEY-SAVING OFFER

15 issues \$3.00—27 issues \$5.00

SIRS: Please send me the next . . . issues of RADIO. Here is my ☐ check (or ☐ money order) for \$. . .
(Remit by Check or Money Order. We cannot assume responsibility for cash sent thru mails)


Name (print carefully)

Address City State

Name of Firm You Work For

Title or Position You Hold (please be explicit)

by the General Electric Company for use in aircraft subassemblies. The design of a particular power package depends upon the application for which it is built. Designs are available for applications including bomb-door operation, landing-gear and wing-flap operation, and operation of control and protective devices.

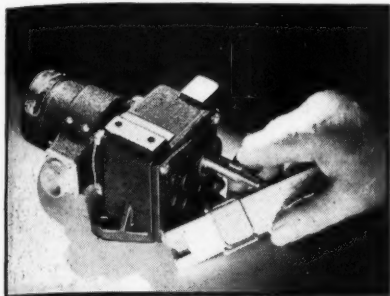

The power package combines in one compact unit as many items as a motor, brake, clutch, and limit switch as well as indicators, gears, and whatever else is required to do a specific job. They are designed for 24-hour service, and can be obtained in ratings from about 1/100 hp to 3 hp.

Each element in the power package is reduced to its simplest terms to save weight and space. For instance, where either a brake or a clutch could be used, the brake is chosen because it has one moving part while the clutch has two.

A new planetary gear system permits the use of a magnetic brake in the power package for some applications. The brake is of the quick-acting friction type and stops the motor quickly to prevent overtravel and consequent jamming of the driven plane assembly. When the power is off, driven equipment is locked in place by the brake, to eliminate creeping of such subassemblies as landing gear.

★

Q. & A. STUDY GUIDE

[Continued from page 22]

of both halves of the cycle, the ripple voltage is 120 cycles, whereas the ripple voltage at the output of the half-wave rectifier tube is 60 cycles, since only one-half of the cycle is rectified, assuming a 60-cycle source.

248. What is the primary purpose of a "bleeder" as used in a filter system?


The primary purpose of a bleeder resistance is to provide some load on the rectifier output, to prevent excessive voltage excursions when no other load at the output is present; and to hold down initial voltages in rectifier circuits employing swinging chokes. A

bleeder resistor also provides a means of discharging the filter condensers when the equipment is shut down; otherwise there would be the danger of shock, even though the equipment were idle.

The resistance of a bleeder is normally higher than the total dynamic load resistance; and is of such a value as to draw around 10 per cent of the total load current.

[Continued on page 42]

Fig. 3. Circuit diagram of a half-wave rectifier system with two-section condenser-input filter. Output ripple is equal to line frequency.

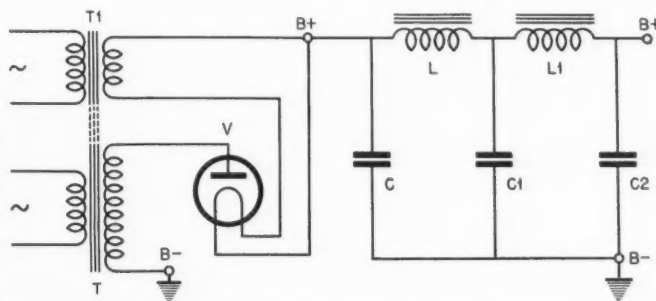

ultra HI-FREQUENCY TRANSCEIVER 2½ METER PORTABLE



"A Precision-Built Instrument for Civilian Defense, WERS, Commercial and Military Applications!"

Meissner 110 to 120 MC. Transceiver is designed to meet the critical requirements of ultra-high frequency portable service. The Transceiver provides dependable two-way portable communications from 5 to 30 miles, depending upon terrain. Built to withstand abuse of portable service. Controls are arranged for ease in operating. Complete stability and maximum sensitivity are provided. Vertical antenna telescopes into cabinet when not in use. Extra compartment for headphone, microphone or combination handset and "log" papers. Dimensions: 12" high, 11" wide, 6¼" deep. Weight (less batteries) 13 lbs.

In WERS and Commercial Emergency News Service, the Meissner Ultra-Hi Frequency Transceiver is the answer to the "short haul" communications problem.

Outstanding FEATURES

- ★ Efficient operation with either a carbon or crystal mike.
- ★ Telescoping vertical antenna built in.
- ★ Balanced high-C, high-Q oscillator.
- ★ Separate quench oscillator provides maximum sensitivity.
- ★ Storage compartment for phones and mike, "log," etc.
- ★ Frequency range, 110 to 120 MC.
- ★ Entirely self-contained; battery operated.
- ★ Range: 5 to 30 miles, depending on terrain.
- ★ Constant antenna load. No ticklish coupling controls.
- ★ Re-radiation non-interfering.

Model No. 9-1081
NET PRICE \$34.50
Complete with tubes and telescope antenna (less batteries)

Meissner
MT. CARMEL, ILLINOIS
"PRECISION BUILT PRODUCTS"

249. If the frequency of the supply source is 60 cycles, what is the output ripple frequency of a three-phase, full-wave rectifier?

The ripple frequency of a three-phase, full-wave rectifier is 6 times the line frequency; in this case, 360 cycles. Hence, with this type of rectifier system, a simple filter will suffice to suppress the ripple.

250. If the frequency of the supply source is 60 cycles, what is the output ripple frequency of a single phase, full-wave rectifier?

The ripple frequency of a single-phase, full-wave rectifier is 2 times the line frequency; in this case 120 cycles. This is evident, since a full-wave rectifier rectifies both halves of each cycle.

QUESTION! QUESTION!



Radio engineers, amateurs, and service-men are availing themselves as never before of the privilege of consulting the Mallory Technical Service, for impartial technical recommendations, furnished promptly and without charge.

Wartime production has had first call on raw materials. Shortages have been created in civilian goods which make substitutions necessary when making repairs or replacements in communication apparatus. Now—more than ever—technical aid is invaluable.

It is obvious that the production of many radio products will be curtailed. However, we can promise that there will be no curtailment of the friendly Mallory technical assistance that is yours for the asking.

P. R. MALLORY & CO., Inc.
INDIANAPOLIS INDIANA
Cable Address—PELMALLO



251. If the plates of a full-wave, high-vacuum rectifier tube become red hot while in operation, what may be the cause(s) of this condition?

This condition would indicate an abnormal load on the tube, said high current drain being due to a shorted filter condenser, a short in the dynamic load, or incorrect tuning in the case of a transmitter. The condition could also indicate an internal short or a "soft" tube.

252. List the primary characteristics of a high voltage plate supply as compared to a low voltage plate supply considering the capacity of the filter condensers required to provide a given degree of filtering.

In a low-voltage plate supply (up to approximately 500 volts), high-capacity electrolytic condensers may be used in the filter, and the filter may be either of the choke- or condenser-input type. Since the working voltage of an electrolytic condenser is restricted to about 600 volts, it cannot be used in a high-voltage plate supply unless two are connected in series (in which case the capacity is halved).

Paper and oil dielectric condensers with considerably higher working voltages are therefore customarily used in the filter circuits of high-voltage plate supplies, with values from 2 to 4 μf as against 8 μf or so for electrolytics. An equal degree of filtering is gained in the high-voltage plate supply by using condensers of lower capacity and chokes having higher values of inductance, a customary arrangement being a two-section, choke-input, filter with an input choke of the swinging type.

253. How may radio-frequency interference from gas-vacuum rectifier tubes be minimized?

Radio-frequency "hash" can be minimized by connecting appropriate radio-frequency chokes in series with each tube plate lead, said chokes being

wound of wire of sufficient gauge to handle the total rectifier plate current involved.

CORRECTION

The answers to Questions 220 and 223 in the Q. & A. Study Guide, September, 1942, RADIO, are incorrect.

The formula involved should have been $f = PS/120$ rather than $f = PS/60$. The answer, then, to Question 220 should be 1200 rpm for a 6-pole alternator, and the answer to Question 223 should be 100 cycles for a 10-pole generator with a speed of 1200 rpm.

NEW TUBE TYPES

[Continued from page 21]

spond in the region down to about 2000Å. It employs a bulb of special glass featuring a high transmission factor for ultraviolet radiation, and top-cap construction to provide high resistance to leakage currents between electrodes. Because of its excellent sta-




Fig. 7. Socket connections for type 935 tube.

bility, consistency of spectral response, and extremely high sensitivity, the 935 is particularly suited for use in measuring ultraviolet absorption of gases and liquids. In such applications, lack of response of the 935 to the infra-red radiation may be an important advantage. Socket connections are shown in Fig. 7.

Tentative Characteristics

Cathode	Semi-cylindrical
Cathode Photosurface	S4
Cathode Window Area	0.9 sq. in.
Direct Interelectrode Capacitance	0.6 μf
Bulb	T-9
Cap	Skirted Miniature
Base	Intermediate Shell Octal 5-Pin
Mounting Position	Any

Maximum Ratings

Maximum Ratings Are Absolute Values

Anode-Supply Voltage (D.C. or Peak A.C.)	250 max. Volts
Anode Current ¹	20 max. Microamp.
Ambient Temperature	50 max. °C
Sensitivity ²	30 Microamp./lumen
Sensitivity at 2537 Angstroms	0.02 approx. Microamp./Microwatt
D-C Resistance of Load: For 250-volt anode-supply voltage	1 min. Megohm

¹ On basis of the use of a sensitive cathode area $\frac{1}{4}$ " in diameter.

² Sensitivity value is given for conditions where a Mazda Projection Lamp operated at a filament color temperature of 2870°K is used as a light source. The method for determining sensitivity employed at 250-volt anode supply and included a 1.0-megohm load resistance. With daylight, value is several times higher; to light from a high-pressure mercury arc, many times higher.

Installation

The base of the 935 fits a standard octal socket which should be mounted so that the light is intercepted by the concave surface of the cathode.

Exposure to intense light, such as direct sunlight, may decrease the tube's sensitivity even though there is no voltage applied. The magnitude and duration of the decrease depend on the length of the exposure. Permanent damage to the tube may result if it is exposed to radiant energy so intense as to cause excessive heating of the cathode.

Shielding of the 935 and its leads to the amplifier is recommended when amplification is high. The leads from the phototube to the amplifier should always be as short as possible to minimize capacitance loss and pick-up from stray fields. Since the tube is a high-resistance device, it is important that insulation of associated circuit parts and wiring be adequate.

When *maximum sensitivity* of phototube circuits is important, special care should be taken to keep the leakage resistance of circuit parts and wiring insulation high. Leakage across moisture films on the surface of the glass can be prevented by coating the glass with pure white ceresin wax, or other non-hygroscopic wax. It is not necessary to coat the whole bulb. A continuous band of wax, approximately a half-inch wide, around the top-cap or around the bulb is sufficient to interrupt all external leakage paths across the phototube surface. Under these conditions, a minimum leakage resistance of 500,000 megohms may be expected.

(Characteristics of the remaining four tube types will be published next month.)

FREQUENCY MODULATION

[Continued from page 10]

there are three essential fundamental differences between amplitude and frequency modulation. First, there may be a number of sidebands bearing appreciable energy in a frequency-modulated wave against two for an amplitude-modulated wave. Secondly, the energy in the sidebands adjacent to the carrier may be negligible in frequency modulation compared to higher order sidebands. Thirdly, the amplitude of the sidebands in an amplitude-modulated wave can never be greater than half the carrier amplitude (100% modulation) whereas the amplitude of some of the frequency-modulated sidebands very materially exceeds that of the carrier. See Figs. 1 and 3.

ASK THE MAN WHO KNOWS



He's your Radio Parts Jobber! When you have an order that carries priority ratings or need some Astatic Product for replacement or repair of existing radio, public address or phonograph equipment, your Radio Parts Jobber is in a position to advise you concerning your requirements. Some products you desire may actually be immediately available in stock. Others may be procurable on order, and, of course, there will be those products in the Astatic line discontinued for the duration owing to the conversion of essential materials to wartime needs. Ask the man who knows . . . your Radio Parts Jobber!

ASTATIC

THE ASTATIC CORPORATION

YOUNGSTOWN, OHIO

Licensed Under Bush Development Co. Patents

In Canada Canadian Astatic Ltd Toronto, Ontario

Transmitting tubes, panel lamps, dry batteries, volume controls, cathode ray tubes, exciter lamps, sound equipment, photo electric cells, condensers

TRANSMITTING

AND SPECIAL PURPOSE TUBES

including

THE LATEST TYPE OF HIGH FREQUENCY TUBES

such as:

832 • 829 • 615 • 114B • 813 • 1201 • 1203A

A COMPLETE LINE OF TRANSMITTING TUBES IN ALL IMPORTANT SIZES UP TO 200 WATTS

for your **ELECTRONIC tubes • parts • supplies**

SEE YOUR **LOCAL NATIONAL UNION DISTRIBUTOR**

EVERY research department today is working with electronic principles. NATIONAL UNION DISTRIBUTORS handle National Union Radio tubes and allied products. They specialize in radio and electronic items and you will find their stocks very complete. Call or write your N.U. distributor for his industrial catalogue. If you do not know his address send your letter to us and we will forward it.

NATIONAL UNION RADIO CORP.

57 STATE STREET, NEWARK, NEW JERSEY



Coming through . . .

Clear . . . intelligible . . . in the heat and noise of battle . . . orders are coming through

Electro-Voice MICROPHONES

While we cannot discuss the actual developments embodied in many of our new models, we can say that they have been designed specifically to limit background noises and to allow speech to come through the bedlam of battle.

ELECTRO-VOICE MFG. CO., Inc.

1239 SOUTH BEND AVENUE

SOUTH BEND, INDIANA

Export Office: 100 VARICK STREET, NEW YORK, N. Y.

Bliley

.... Accuracy and dependability are built into every Bliley Crystal Unit. Specify **BLILEY** for assured performance.



QUARTZ CRYSTALS

BLILEY ELECTRIC COMPANY

UNION STATION BUILDING

ERIE, PA.

In phase modulation the number of important energy-bearing sidebands is a function of phase deviation only and is independent of the modulating frequency. However, as previously indicated, the essential bandwidth or the frequency difference between the carrier and any given sideband, say the 5th, is a function of the modulation frequency. Thus for a given phase deviation the 5th-order sideband is equally important in energy content whether the modulation frequency is 50 cycles or 10,000 cycles. However, for the 50-cycle case the 5th sideband is separated from the carrier by 250 cycles, whereas for 10,000 cycles the 5th sideband is removed from the carrier by 50,000 cycles. This is not the case in frequency modulation, where the number of important sidebands is larger for lower modulating frequencies than for higher modulating frequencies for a constant frequency deviation. The bandwidth required for both frequency and phase modulation is a function of the modulation index. See Figs. 2 and 3.

The aforementioned characteristics of phase and frequency modulation are not necessarily defects, and when properly understood and used can generally be turned to advantage. Indeed, it is because of some of these characteristics of phase and frequency modulation, so long unappreciated, that these systems are destined to play a major role in communication systems of the future.

H. F. SWEEP CIRCUITS

[Continued from page 13]

the sweep can be in the form of an ellipse or a circle. This form of trace is very easily obtained from any alternating voltage through the circuit of Fig. 13. The trace will be a circle if the reactance of the condenser C equals the resistance of the resistor R . In all other cases, the trace is an ellipse.

The signal can be applied to one pair of c-r plates and all deflections from the signal will then be in one direction only, either vertical or horizontal. It is also possible to obtain a radial deflection. This is best done by connecting the voltage to be observed in series with the plate supply; the sensitivity is then changed and the diameter of the circle varies with the applied signal.

If the circular trace is combined with a sawtooth sweep applied to one set of plates, the resulting sweep is in the form of a helix. This is just another way of providing a longer sweep. The sawtooth sweep circuit should be connected in series with one of the c-r plates, as at X in Fig. 13.

It would be better still to obtain a

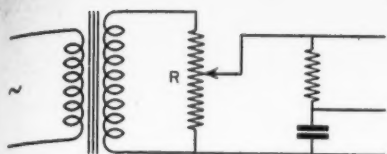


Fig. 14. Spiral sweep circuit.

true spiral as a sweep. This can be obtained by means of the circuit shown in Fig. 14. If the potentiometer *R* is rotated manually, a spiral trace is had. If the potentiometer is replaced by the plate resistance of a tube in series with a fixed resistance, the spiral trace can be contrived automatically. Applying a sawtooth wave to the grid of the tube will vary its plate resistance, thereby causing the tube to function as an automatic potentiometer.

Another possible method is the use of a variable- μ tube as an amplifier for the original deflection voltage, and the variation of the gain of this tube by the application of a sawtooth voltage to its control grid. An example of this is shown in Fig. 15, where a 6L7 is used for the purpose.

BOOKS ON CATHODE-RAY TUBES

American

The Cathode-Ray Tube at Work, by John F. Rider.

Cathode-Ray Tubes and Allied Types. RCA Technical Series TS-2.

British

The Low-Voltage Cathode-Ray Tube, by G. Parr.

Cathode-Ray Tubes, by Manfred von Ardenne (translated from the German).

Cathode-Ray Oscillography, by J. T. MacGregor-Morris and J. A. Henley.

Cathode-Ray Oscillographs, by J. H. Reynier.

The Cathode-Ray Oscillograph in Radio Research, by R. A. Watson-Watt.

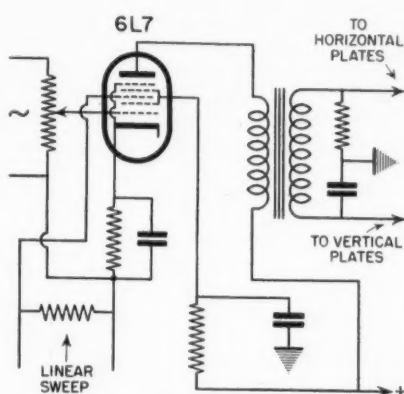


Fig. 15. Automatic spiral sweep circuit.

Under the Sea Pincor Products Keep 'Em Winning!

DYNAMOTORS * CONVERTERS * GENERATORS
D.C. MOTORS * POWER PLANTS * GEN-E-MOTORS

PIONEER GEN-E-MOTOR
CHICAGO, ILLINOIS
EXPORT ADDRESS: 22 WARREN STREET, N. Y., N. Y.
CABLE: SIMONTRICE, NEW YORK

DEPENDABLE MUTER PRODUCTS * DEPENDABLE MUTER PRODUCTS

DEPENDABLE **MUTER** PRODUCTS

Manufacturers
of Component parts for
the Radio, Electronic
and Communications
Industries

THE **MUTER** CO.
1255 South Michigan Avenue
Chicago, U. S. A.

MUTER PRODUCTS * DEPENDABLE



VICTORY depends on COMMUNICATIONS

On America's far-flung battle fronts, radio communications are speeding the ultimate victory. At home and abroad, wherever our combat units are in training or in action, BUD Products prove their *dependability* under all conditions.

BUD RADIO, Inc. • Cleveland, Ohio

**RADIO, ELECTRONIC
AND SOUND SUPPLIES
AVAILABLE!**

Lafayette is your COMPLETE source of supply, especially on those hard to find Electronic, Radio and Sound Equipment parts . . . no order too small or too large for our prompt attention. **LAFAYETTE GIVES YOU IMMEDIATE ACTION** on deliveries! Lafayette personnel is trained to work with your expeditors.

If quick delivery of engineering samples, or production quantities is your problem, write, wire or phone Lafayette.

FREE Buyers Guide!—130 pages indexed for quick reference . . . Get your copy now! Address Dept. 11F2, 901 W. Jackson Boulevard, Chicago, Ill.

[Camera Fans—Photographic equipment at lowest prices! Write for complete catalog.]

LAFAYETTE RADIO CORP.

901 W. JACKSON BLVD., CHICAGO, ILL. • 265 PEACHTREE ST., ATLANTA, GA.



NEWS

RADIO DRAFT DEFERMENT

According to a recent RMA Bulletin, thirty-five general occupations of radio and radar manufacturers were designated as "essential" in the directive of Selective Service System headquarters, issued October 30th.

Although Occupational Bulletin No. 32 is dated October 23, the formal order of SSS National Headquarters was not issued until the 30th, following weeks of development by the WPB Radio and Radar Branch, under Deputy Director Ray C. Ellis and his staff, and Army and Navy branches. The Selective Service System action, upon certification from the War Manpower Commission, does not automatically provide a deferment for any employees in the specified 35 occupational classifications, but is a guide sent to all local draft boards for their consideration of occupational deferment of persons in the designated classifications. Such deferment is limited to a six-months' period.

The Selective Service order for radio and radar manufacturers follows issuance, on October 12, of a similar bulletin, Occupational Bulletin No. 27, covering communications services, including radio broadcasting, telephone, telegraph and newspapers. The important basic clause in the radio manufacturers' Occupational Bulletin No. 32 is its general application, in clause 2(a), covering production of all communication equipment, and also the certification of the War Manpower Commission that production of such communication equipment is "an activity essential to the support of the war effort." Clause 2(a) will afford a general basis for appeal, in connection with local draft boards and Boards of Appeal, for deferment of such employees of radio manufacturers as are not included among the 35 general classifications of the Selective Service bulletin.

WPB officials have officially advised RMA that the Selective Service Occupational Bulletin No. 32 does not provide for automatic deferment of any employees among the 35 classifications. Manufacturers still must apply on SSS Form 42-A for deferment of essential, or "key" employees, and manufacturers' personnel managers should handle appeals to local draft boards, based on the essential employment of employees as covered by Occupational Bulletin No. 32.

Information to RMA from trade associations of other industries, which have had similar Selective Service deferment classifications, is that the Selective Service bulletins to local draft

Super-Sealed PAPER TUBULARS



• These super-sealed Aerovox paper tubulars are just as good as they look. Beneath that colorful yellow-black-red label jacket you'll find an extra-generously-waxed cartridge for maximum protection against moisture penetration. Likewise extra-generously-waxed ends, neatly milled, with pigtail leads that won't work loose. In all climes, from frigid Arctic to torrid tropics, these paper tubulars are establishing new performance records. Why take less?

PAPER TUBULAR CONDENSERS

Type 484—400 v. D.C.W.
.01 to 1.0 mfd.
Type 684—600 v. D.C.W.
.001 to .5 mfd.
Type 1084—1000 v. D.C.W.
.001 to .1 mfd.
Type 1684—1600 v. D.C.W.
.004 to .05 mfd.

• Ask Our Jobber ...

He'll gladly take care of your essential condenser requirements with these paper tubulars and other types. Ask for latest catalog—or write us direct.



boards have not been largely effective in securing deferment. Therefore, the Selective Service action in connection with employees of radio manufacturers does not insure draft deferment, merely because of the issuance of Occupational Bulletin No. 32. This is merely official information and guidance to local draft boards of the classifications of radio manufacturers' employees considered essential, and which should be given due consideration by local draft boards. A detail of the classification of "repairman" is that this is limited to repair and servicemen of manufacturers, and does not apply nor extend to servicemen of distributors and dealers, nor to individually operating radio servicemen.

Radio manufacturers having difficulties in connection with deferment of important, fundamental "key," essential employees are promised assistance by the WPB Radio and Radar Branch, and also by the Army and Navy agencies in any important individual deferment cases.

The matter of amending Occupational Bulletin No. 32 by extending Selective Service action to a class of employees not included in the bulletin should be taken up with the WPB Radio and Radar Branch, for submission to and discussion with the War Manpower Commission.

★

NEW CORPORATION FORMED FOR AIR- CRAFT PRODUCT DEVELOPMENT

Announcement has been made of the formation of the Aircraft Parts Development Corporation, with offices, laboratories, and shops in Summit, New Jersey.

This organization will handle research and development work on parts and materials for the Aircraft Industry, especially in the fields of fastening devices, powdered metals, and plastics. It is planned to solicit ideas and untested projects from engineers and inventors, and to carry them through complete development to the point of release for commercial manufacture. The activity will extend to the designing and tooling of any special machinery required for the manufacture of products evolved.

Facilities include a fully equipped tool room, special experimental machinery, a powdered metal experimental laboratory, and a pilot thermoplastics plant. The executive and technical personnel of the organization will be announced in a few weeks.

★

CLAROSTAT PRODUCT CONTROL EARNS "A" CLASSIFICATION

The inspection routine or quality control practiced in the Clarostat plant has won the rare recognition of an "A"

**We are
Pitching
for
Uncle Sam
for the
Duration!**

**Our Army
of workers
and engineers
will be intact
—to serve our
many good
customers—**

**when it's over
over there!**

HENRY FORSTER

President

RADIO SPEAKERS

INCORPORATED

221 East Cullerton St.

Chicago, Illinois

OHMITE

Resistance Units



are built for long trouble-free service

Send for **FREE** Ohmite Stock-Unit Catalog No. 18. Very handy for quick reference.



The extras built into Ohmite Resistance Units make them electrically and physically fit for the toughest service. That is why you find these rugged units so widely used everywhere — in planes, tanks and ships—in communications and electronic equipment—in research and production — in training centers and industrial plants. It's well worth remembering in dealing with today's resistance-control problems and in the development of new devices to defeat the enemy and build for tomorrow's peace.



Send 10c for handy Ohmite Ohm's Law Calculator. Helps you figure ohms, watts, volts, amperes—quickly, easily.

OHMITE MANUFACTURING COMPANY
4867 Flournoy St., Chicago, U. S. A.



classification granted by the Eastern Procurement District, Army Air Force. This means that Clarostat's own inspectors, having demonstrated a high degree of quality control to the satisfaction of the Air Force, are now entrusted with full responsibility of meeting all requirements as established. Duplication of inspection during fabrication by Air Corps inspectors can thus be eliminated, and the latter can now confine their activities to general supervision of the inspection system and the final approval and stamping of completed assemblies.

★

SYLVANIA AWARDED ARMY-NAVY E

Lieut. General Joseph T. McNarney, deputy chief of staff, U. S. Army and Rear Admiral Charles Fisher, director of Shore Establishments, U. S. Navy, on the occasion of the awarding of the Army-Navy E flag to the Emporium, Pa. plants of Sylvania Electric Products, Inc., jointly complimented the workers and the management for record breaking production of radio tubes and electronic equipment for war. Ceremonies were held during the afternoon of November 5th on the lawn facing the main plant.

★

ARMY-NAVY "E"

The Army-Navy "E" for excellence in production was awarded Clarostat Mfg. Co., Inc., of 285-7 N. 6th St., Brooklyn, N. Y., with impressive ceremonies held in the Grand Ballroom of the St. George Hotel, followed by a dinner and entertainment for several hundred honored guests, officials and employees.

★

G.E. MOTOR FITNESS MANUAL

Motor fitness requirements is the subject of a new 40-page illustrated bulletin (GED-1017) recently issued by the General Electric Company. Although primarily intended for plants converted to war production, the bulletin will prove valuable in all plants in which motors are widely used.

The bulletin discusses the following subjects in a highly comprehensive and informative manner: How to get the most service out of old and new motors, "switching" motors from one job to another, and equipping old machines with new motors.

Also, selection and application of motors, various types of motor enclosures, secondary ratings of standard integral-hp. motors, ways to determine WR^2 , motor maintenance, full load currents of motors, selection of a.c. control, and the use of the hook-on volt-ammeter. A supplement explains how to save critical motor materials, including WPB recommendations, and

VOKAR

CURRENTLY PRODUCING

JK26 JK48 JACKS
FT243 CRYSTAL HOLDERS

★ ★

Radio and Electrical
Assemblies

★ ★

**WRITE FOR
INFORMATION**

★ ★

**ELECTRONIC PRODUCTS
MFG. CORP.**

7300 Huron River Drive
DEXTER, MICHIGAN



Component Parts & Complete Assembly, Drake Type 50

Used in War Equipment

MOST popular and most versatile of all Drake Jewel Light Assemblies, Type 50 is used in large quantities for aircraft, communications, radio, and other electrical war equipment. Type 50 offers a 1/2" Jewel and is mounted horizontally in very little space. Varying panel thicknesses are compensated for by 3 removable fibre washers. T3 1/4 tubular lamp can be changed from front of panel. Big variety of Drake Dial and Jewel Light Assemblies are described in our catalog. Have you a copy?




**NO. 50
JEWEL
LIGHT
ASSEMBLY**

DRAKE MANUFACTURING CO.
1713 W. HUBBARD ST. • CHICAGO, U. S. A.

COVINGTON LAPIDARY EQUIPMENT FOR QUARTZ CRYSTAL PRODUCTION

Used by the U. S. Government

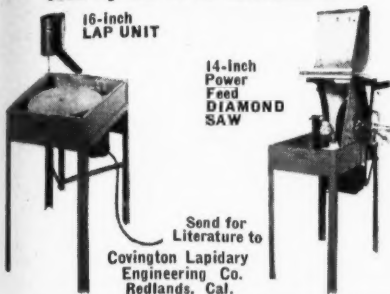

Send for Literature to
Covington Lapidary
Engineering Co.
Redlands, Cal.

RADIO

CATALOG NO. 50

164 PAGES
SETS-PARTS
SUPPLIES
FLUORESCENT

Burstein Applebee Co.

PACKED WITH VALUES!

BIG FREE CATALOG

EVERYTHING IN RADIO

Sets, parts, supplies, public address systems, amateur equipment, testers, kits and fluorescent lighting at lowest prices. Huge stocks, bought months ago... ready for shipment the same day your order is received. The Defense Program is making big demands on our industry but because of our advance buying we are able to fill your orders promptly and efficiently.

BURSTEIN-APPLEBEE COMPANY
1012-14 McGEE STREET, KANSAS CITY, MISSOURI

BONDS BUY BOMBS

Single Source of Supply
for Everything in
Electronics and Radio



Tubes
Test Equip.
Photo Cells
Transformers
Relays
Condensers
Resistors
Rheostats
Switches
Rectifiers
Public Address
Tools
Coils
Receivers
Generators
Sockets
Wire
Speakers
Batteries

*Send for the
Allied
Catalog*

Save time and trouble. Use this Allied Catalog for quick reference—get Everything you need in Electronic and Radio supplies for engineering communications laboratory and industrial applications—quickly from our complete stocks. For your FREE copy write

ALLIED RADIO
Dept. 32-K-2 833 W. Jackson, Chicago

★ **ALLIED RADIO** ★

information on the use of load-time-temperature charts.

The bulletin is arranged throughout for quick reference.

COLOR CODE RESISTOR CARD

Sylvania announces a Color Code Resistor card for radio technicians issued at this time as a help in the War-time radio servicing job. It is free to all Sylvania radio servicemen.

In handy pocket size form, the Sylvania Color Code Resistor Card should prove to be a most valuable aid in circuit revision work. It clearly shows

OHM'S LAW

When a continuous current is flowing thru a given conductor, the ratio of the voltage (pressure) is maintained constant, the ratio of the potential difference or voltage existing between the conductor is a constant and the current carried by the conductor may be expressed in terms of what the Ohm's Law may be expressed in terms of.

COLOR CODE CHART—RMA STANDARD			
AXIAL TYPE LEADS		RADIAL TYPE LEADS	
A	B	C	D
Black 0	Black 0	Brown 1	No Color ±20%
Brown 1	Brown 1	Red 2	000 Silver ±10%
Red 2	Red 2	Orange 3	0000 Gold ±5%
Orange 3	Orange 3	Yellow 4	
Yellow 4	Yellow 4	Green 5	
Green 5	Green 5	Blue 6	
Blue 6	Blue 6	Purple 7	
Purple 7	Purple 7	Gray 8	
Gray 8	Gray 8	White 9	
White 9	White 9		

Resistor Color Code. The A color of a resistor denotes the first significant figure, the B color the second significant figure and the C color indicates the number of zeros after the first two significant figures. The D color denotes the tolerance value of the resistor.

Example:
Band A (Axial Type) or Body (Radial Type) = Red
Band B (Axial Type) or Dot (Radial Type) = Green
Band C (Axial Type) or Band (Radial Type) = Orange
Value of Resistor = 25000 Ohms

the A, B, C, and D color denotations of a resistor, explains the resistor color code and gives examples. On the reverse side of the card is Ohm's Law, one of the basic radio circuit formulas. Its definition and explanation is a helpful reference for every radio man.

They are available through Sylvania jobbers or can be secured by writing directly to Sylvania News, Emporium, Pa.

BULLETIN ON SOLENOIDS

Two new laminated solenoids are described in a bulletin released by Dean W. Davis & Co., 549 W. Fulton St., Chicago, Illinois. No. 2861 pull type and No. 2923 push-pull type, are covered.

They are particularly designed for specification by engineer-designers for hydraulic valves and general industrial purposes. Maximum magnetic force for given electrical input is effected by design, laminated frame and plunger and other features. More work per watt input is demonstrated.

Coils may be paper section wound, cloth-taped and treated to make impervious to cutting oils and coolant. Installation is easy for either direct or remote control, and quick short thrusts. For a.c. or d.c. All voltages. Stroke 7/8". Bulletin may be had free by addressing the manufacturer.

DRAFTEES ATTENTION!

It's up to you to secure a higher rank and better pay and you can do it in your own home with the Candler System. Over a quarter of a century experience in successfully teaching Radio Code. This easy, simplified method of learning Radio Code has trained thousands. There are courses for beginners and operators wishing maximum code proficiency. There is a big demand for Radio Code operators right now! . . . send a post card today for the

FREE BOOK OF FACTS

Tells you all about this fascinating work . . . your copy is waiting for you, there is no obligation . . . send for it today!



**CANDLER
SYSTEM CO.**

BOX 528
Dept. R11, Denver, Colorado

Quality above all

SOLAR
CAPACITORS

SOLAR MFG. CORP. BAYONNE, N. J.

**NOW! you can secure
the math you need**

for solving every day
electrical and radio
problems



Radiomen and electricians know that the language and the habit of mathematics are essential for real progress in their chosen field. They know mathematics is a tool that they are helpless without.

NOW out of the U. S. Navy Radio Material School at Anacostia Station comes a complete home-study book that is so thorough and so detailed that any reader "who can perform arithmetical computations rapidly and accurately is capable of mastering the principles laid down in this text."

**MATHEMATICS for
ELECTRICIANS and RADIOMEN**

By N. M. COOKE,
Chief Radio Electrician, U. S. Navy
604 pages 6 x 9, \$4.00

This book teaches you mathematics from elementary algebra through quadratic equations, logarithms, trigonometry, plane vectors and elementary vector algebra with direct applications to electrical and radio problems. It teaches you how to apply this mathematical knowledge in the solutions of radio and circuit problems. In other words, it gives you the grasp of mathematics you need and then shows you how to use your knowledge.

Based on over 8 years' experience teaching mathematics to U. S. Navy electricians and radio operators, the book gives you 600 illustrative problems worked out in detail and over 3000 practice problems with answers so you can check your work.

10 DAYS' FREE EXAMINATION
McGraw-Hill Book Co., 330 W. 42nd St., New York
Send me Cooke's Mathematics for Electricians and Radiomen for 10 days' examination on approval. In 10 days I will send you \$4.00 plus few cents postage, or return book postpaid. (We pay postage if remittance accompanies order.)

Name
Address
City and State
Position
Company R. 11-42

RADIO

★ NOVEMBER, 1942

QUANTITY DELIVERY NOW

For Government contracting and subcontracting for land, sea and other field communications devices.

Types PL-54, PL-55, PL-68, JK-26, JK-48 and companion plug, and SW-141.

Universal Microphone Co., Ltd.
Inglewood Calif.

ADDRESS CHANGE?

Notify RADIO's Circulation Department at 132 West 43rd Street, New York, N. Y., of your new address two or three weeks before you move. The Post Office Department does not forward magazines sent to a wrong address unless you pay additional postage. We cannot duplicate copies mailed to your old address. Thank you!

ADVERTISING INDEX

Aerovox Corp.	47
Allied Radio	49
Astatic Corp.	43
Bliley Electric Co.	44
Bud Radio, Inc.	46
Burstein-Applebee Co.	49
Candler System Co.	49
Centralab	37
Covington Lapidary Eng. Co. ..	49
Drake Mfg. Co.	48
Echophone Radio Co.	23
Eitel-McCullough, Inc.	35
Electronic Products Mfg. Corp.	48
Electro-Voice Mfg. Co., Inc. ..	44
Guardian Electric Co.	25
Hallicrafters Co., The3, 4	
Jensen Radio Mfg. Co.	8
Lafayette Radio Corp.	46
Mallory & Co., P. R.	42
McGraw-Hill Book Co., Inc. ..	49
Meissner Mfg. Co.	41
Muter Co., The	45
National Co., Inc.Cover 3	
National Union Radio Corp. ..	43
Ohmite Mfg. Co.	48
Pioneer Gen-E-Motor	45
Radio Speakers, Inc.	47
Raytheon Mfg. Co.Cover 4	
Shure Brothers	6
Sola Electric Co.	33
Solar Manufacturing Co.	49
Sprague Specialties Co.	26
Standard Transformer Corp. ..	31
Thermador Electrical Mfg. Co..	27
Triplett Elect. Inst. Co., The ..	28
United Transformer Co.Cover 2	
U.S. Army Signal Corps	38
Universal Microphone Co., Ltd..	50
Utah Radio Products Co.	39

FIRST AID INDEX

A First Aid Index in handy pocket size form is being issued by Sylvania for radiomen to use with local war emergency volunteer groups. It measures 6½ x 3 inches folded, and fits into pocket, purse or auto compartment. They are available at 5c each; minimum quantity for imprinting by Sylvania is one hundred.

The Sylvania First Aid Index is authoritative, bearing the approval of the Commander-in-Chief of the U.S. Volunteer Life Saving Corps.

★

WOMEN AT WORK

Universal Microphone Co., Inglewood, Cal., was the first factory in the southwest to use women inspectors of the Army Signal Corps inspectors division. The entire inspection staff will ultimately be composed of women, with a male supervisor.

★

TUBE CONNECTION CHART

"Tube Base Data Connections and Chart," the new issue just released by Weston Electrical Instrument Corporation, assembles in convenient folder form the element connection and base layout of over 600 different types of radio tubes. Originally designed for use with the Weston method of selective analysis, but now used with all methods of servicing, this folder permits rapid socket selection for practically any tube now in commercial use.

Tube base connections are illustrated by diagrammatic sketches of the bottom view of socket or base of tubes; constituting valuable reference material on tube circuits. A tube base chart

is also included which indicates the proper base to use for any of the various tubes listed. A copy of this folder may be obtained by writing to Weston Electrical Instrument Corporation, Newark, N. J.

★

MANDERNACH NAMED G-E REPLACEMENT TUBE S.M.

H. J. Mandernach has been appointed sales manager of the Replacement Tube Section of General Electric's Radio, Television and Electronics Dept., at Bridgeport, Conn., according to an announcement by A. A. Brandt, Sales Manager of the Receiver Division.

In his new position, Mr. Mandernach is responsible for replacement sales of all types of electronic tubes handled through distributors, including tubes for radio receivers, transmitters, industrial control and power applications.

★

Production Designer

Want competent man capable of supervising drafting or layout job, able to recommend modification of a complete design to facilitate production by modern methods. Man with experience in manufacture of light equipment of a structural nature for limited production; requires broad experience with knowledge of relative merits of all well-known production methods such as bending, forming, drawing, punching and forging.

Man of these talents not now in 100% war work will be highly compensated with unusual opportunity and permanency in important war assignment with large manufacturer located in Boston. Give complete particulars for interview in Chicago. Applications held strictly confidential.

Write Box R-11, Radio Magazines, Inc.


HALF PRICE SUBSCRIPTIONS . . .



for Men in the U. S. Armed Services

Subscriptions to "RADIO" addressed to men in the U. S. Army, Navy, Marine Corps, or Coast Guard will be accepted at the below-cost rate of \$1.50 per year. Subscriptions at this rate (whether ordered by the addressee or a donor) should be accompanied by a remittance in full; addressee's rank and military address must be given. This rate applies wherever domestic U. S. postal service extends, including naval units at sea and overseas army postoffices. No cancellations or refunds.

Simply write rank, name, and military address on a slip of paper and send, accompanied by remittance, to

Radio Magazines, Inc., 132 W. 43rd St., New York, N. Y.




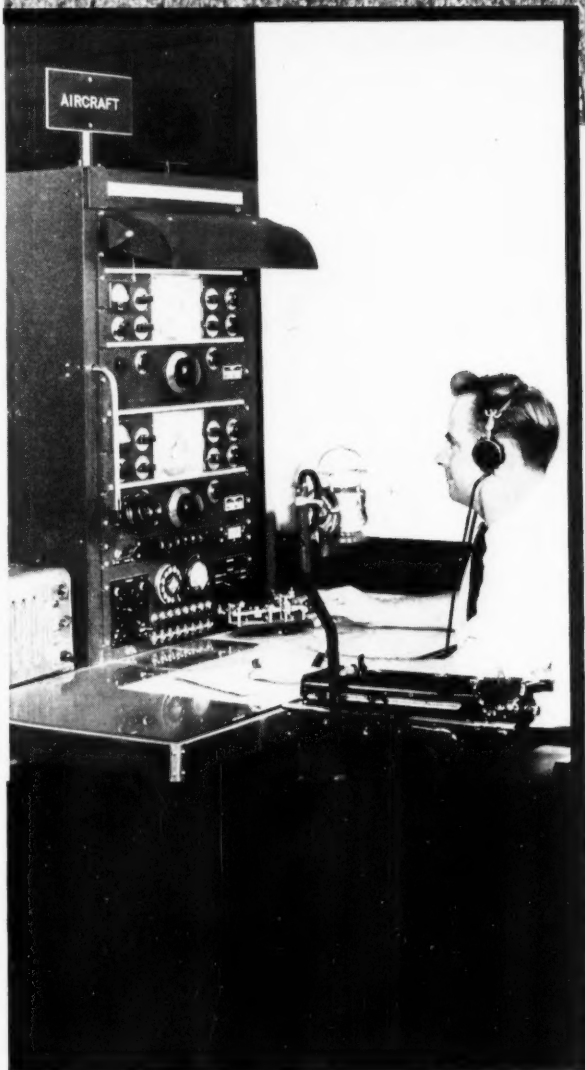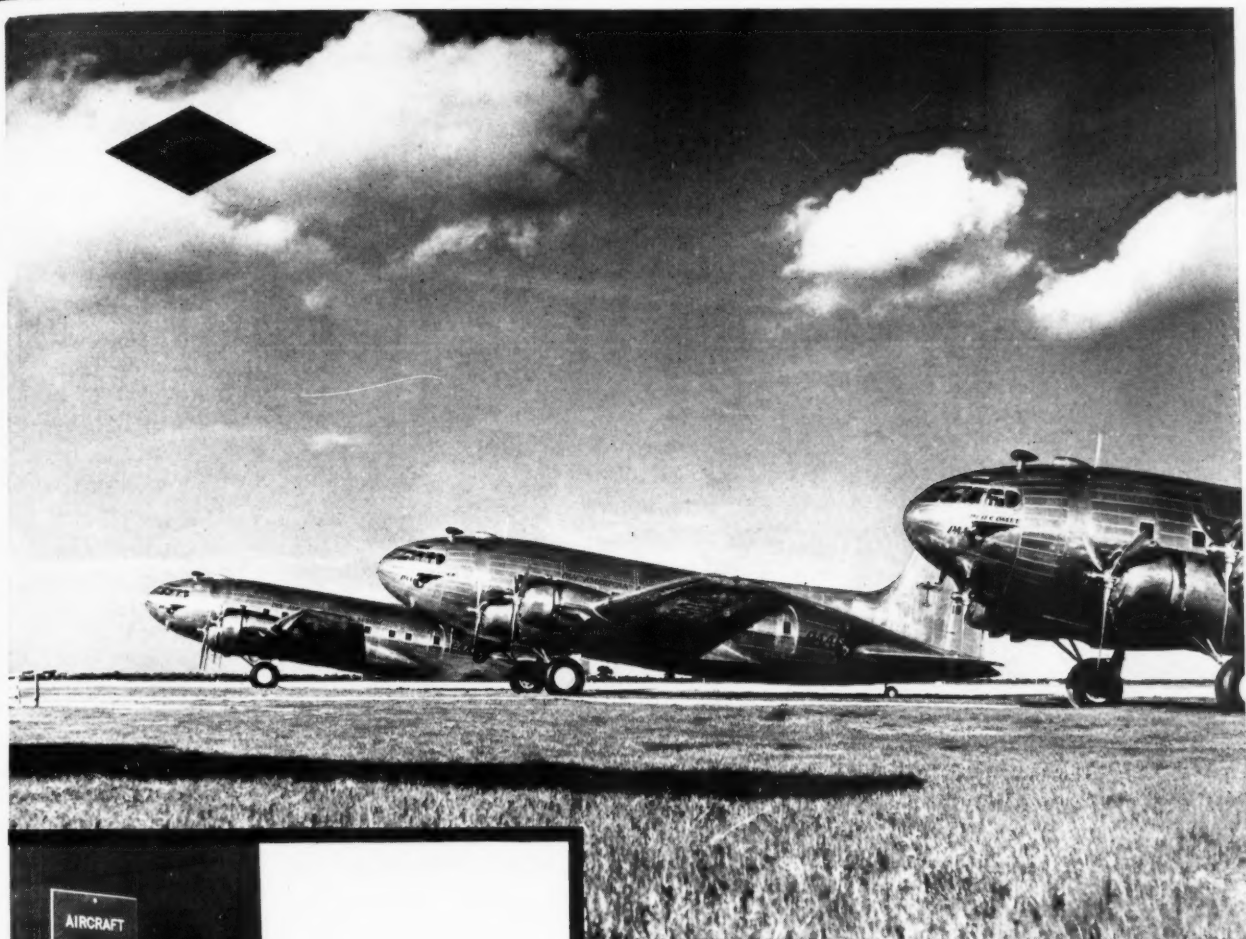

It is not too much to say that Pan American Airways has invented the technique of transoceanic air transport; a technique based on superb skill, meticulous maintenance, and thoroughly reliable equipment.

National and Pan American Airways have never been strangers, but we are particularly proud that year by year Pan American has turned increasingly to National communication Equipment.

NATIONAL COMPANY, INC.
MALDEN, MASSACHUSETTS

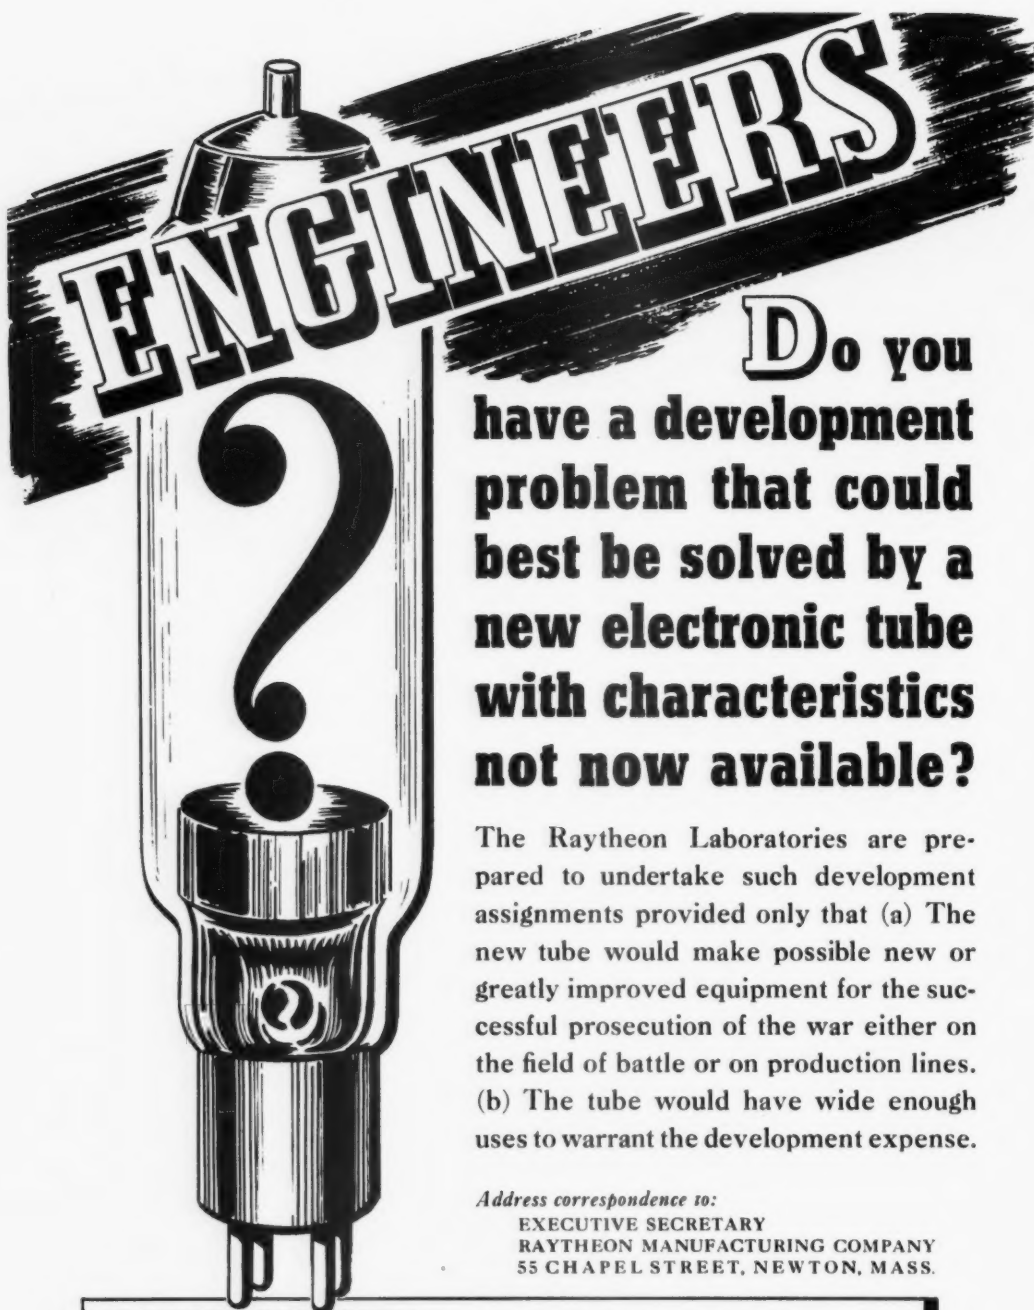

Do you have a development problem that could best be solved by a new electronic tube with characteristics not now available?

The Raytheon Laboratories are prepared to undertake such development assignments provided only that (a) The new tube would make possible new or greatly improved equipment for the successful prosecution of the war either on the field of battle or on production lines. (b) The tube would have wide enough uses to warrant the development expense.

Address correspondence to:

EXECUTIVE SECRETARY
RAYTHEON MANUFACTURING COMPANY
55 CHAPEL STREET, NEWTON, MASS.

ENGINEERS WANTED! Raytheon's vital wartime assignments are in the field of electronic development. Have unusual opportunity for engineers who want to be connected with important war assignments. At Raytheon you would work with some of the best known research specialists on tubes and equipment. Write **SPECIAL ENGINEERING PERSONNEL**.

**Raytheon Manufacturing
Company**

Waltham, Massachusetts

DEVOTED TO RESEARCH AND THE MANUFACTURE OF TUBES FOR THE NEW ERA OF ELECTRONICS